


Pioneer

Service Manual



N-50

ORDER NO.
RRV4272

NETWORK AUDIO PLAYER

N-50
N-50-K
N-50-S
N-30
N-30-K
N-30-S

THIS MANUAL IS APPLICABLE TO THE FOLLOWING MODEL(S) AND TYPE(S).

Model	Type	Power Requirement	Remarks
N-50	CUXE	AC 120V	
N-50-K	SYXE8	AC 220V to 240V	
N-50-S	SYXE8	AC 220V to 240V	
N-30	CUXE	AC 120V	
N-30-K	SYXE8	AC 220V to 240V	
N-30-S	SYXE8	AC 220V to 240V	



PIONEER CORPORATION 1-1, Shin-ogura, Saiwai-ku, Kawasaki-shi, Kanagawa 212-0031, Japan

PIONEER ELECTRONICS (USA) INC. P.O. Box 1760, Long Beach, CA 90801-1760, U.S.A.

PIONEER EUROPE NV Haven 1087, Keetberglaan 1, 9120 Melsele, Belgium

PIONEER ELECTRONICS ASIACENTRE PTE. LTD. 253 Alexandra Road, #04-01, Singapore 159936

©PIONEER CORPORATION 2012

SAFETY INFORMATION



This service manual is intended for qualified service technicians ; it is not meant for the casual do-it-yourselfer. Qualified technicians have the necessary test equipment and tools, and have been trained to properly and safely repair complex products such as those covered by this manual.

Improperly performed repairs can adversely affect the safety and reliability of the product and may void the warranty. If you are not qualified to perform the repair of this product properly and safely, you should not risk trying to do so and refer the repair to a qualified service technician.

WARNING

This product contains lead in solder and certain electrical parts contain chemicals which are known to the state of California to cause cancer, birth defects or other reproductive harm.

Health & Safety Code Section 25249.6 - Proposition 65

B

NOTICE

(FOR CANADIAN MODEL ONLY)

Fuse symbols ━━ (fast operating fuse) and/or ━━ (slow operating fuse) on PCB indicate that replacement parts must be of identical designation.

REMARQUE

(POUR MODÈLE CANADIEN SEULEMENT)

Les symboles de fusible ━━ (fusible de type rapide) et/ou ━━ (fusible de type lent) sur CCI indiquent que les pièces de remplacement doivent avoir la même désignation.

C


(FOR USA MODEL ONLY)

1. SAFETY PRECAUTIONS

The following check should be performed for the continued protection of the customer and service technician.

LEAKAGE CURRENT CHECK

Measure leakage current to a known earth ground (water pipe, conduit, etc.) by connecting a leakage current tester such as Simpson Model 229-2 or equivalent between the earth ground and all exposed metal parts of the appliance (input/output terminals, screwheads, metal overlays, control shaft, etc.). Plug the AC line cord of the appliance directly into a 120V AC 60 Hz outlet and turn the AC power switch on. Any current measured must not exceed 0.5 mA.

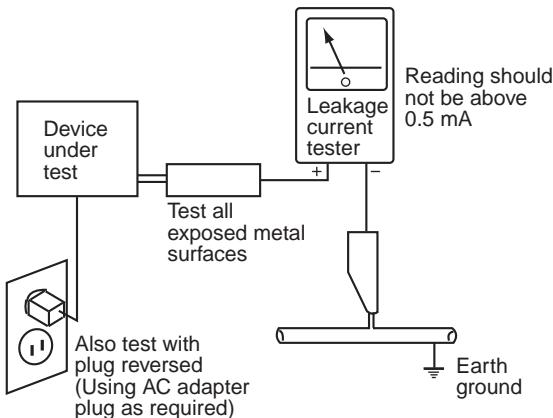

AC Leakage Test

ANY MEASUREMENTS NOT WITHIN THE LIMITS OUTLINED ABOVE ARE INDICATIVE OF A POTENTIAL SHOCK HAZARD AND MUST BE CORRECTED BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

2. PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in the appliance have special safety related characteristics. These are often not evident from visual inspection nor the protection afforded by them necessarily can be obtained by using replacement components rated for voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this Service Manual.

Electrical components having such features are identified by marking with a ! on the schematics and on the parts list in this Service Manual.

The use of a substitute replacement component which does not have the same safety characteristics as the PIONEER recommended replacement one, shown in the parts list in this Service Manual, may create shock, fire, or other hazards.

Product Safety is continuously under review and new instructions are issued from time to time. For the latest information, always consult the current PIONEER Service Manual. A subscription to, or additional copies of, PIONEER Service Manual may be obtained at a nominal charge from PIONEER.

F

CONTENTS

SAFETY INFORMATION.....	2
1. SERVICE PRECAUTIONS	4
1.1 NOTES ON SOLDERING	4
2. SPECIFICATIONS.....	5
2.1 ACCESSORIES.....	5
2.2 SPECIFICATIONS	5
2.3 PLAYABLE FILE FORMATS	6
3. BASIC ITEMS FOR SERVICE	10
3.1 CHECK POINTS AFTER SERVICING	10
3.2 PCB LOCATIONS	11
3.3 JIGS LIST	12
4. BLOCK DIAGRAM	14
4.1 OVERALL CONNECTION DIAGRAM (1/2)	14
4.2 OVERALL CONNECTION DIAGRAM (2/2)	16
4.3 BLOCK DIAGRAM	18
5. DIAGNOSIS	20
5.1 TROUBLESHOOTING	20
5.2 PROTECTION CIRCUIT ERROR DETECTION	23
5.3 HOW TO CHECK THE IC COMMUNICATION	24
5.4 IC INFORMATION	24
6. SERVICE MODE	25
6.1 SERVICE MODE	25
6.2 INITIAL SETTING	27
7. DISASSEMBLY	28
8. EACH SETTING AND ADJUSTMENT	34
8.1 FIRMWARE UPDATE	34
8.2 HOW TO CHECK EACH TERMINAL	37
9. EXPLODED VIEWS AND PARTS LIST.....	40
9.1 PACKING SECTION	40
9.2 EXTERIOR SECTION	42
10. SCHEMATIC DIAGRAM	44
10.1 JACK ASSY	44
10.2 D-MAIN ASSY (1/5)	46
10.3 D-MAIN ASSY (2/5)	48
10.4 D-MAIN ASSY (3/5)	50
10.5 D-MAIN ASSY (4/5)	52
10.6 D-MAIN ASSY (5/5)	54
10.7 DAC ASSY	56
10.8 LCD/KEY ASSY	58
10.9 LED ASSY, POWER SW ASSY, IR ASSY AND POWER LED ASSY	60
10.10 USB ASSY	62
10.11 STBY ASSY	64
10.12 CNT A ASSY AND CNT B ASSY	66
10.13 GUIDE 1, GUIDE 2(N-50, N-50-K-S ONLY), GUIDE 3 AND GUIDE 4 ASSYS	68
11. PCB CONNECTION DIAGRAM	70
11.1 JACK ASSY	70
11.2 D-MAIN ASSY	72
11.3 DAC ASSY	76
11.4 LCD/KEY ASSY	80
11.5 LED ASSY, POWER SW ASSY, IR ASSY AND POWER LED ASSY	82
11.6 USB ASSY AND STBY ASSY	84
11.7 CNT A ASSY AND CNT B ASSY	88
11.8 GUIDE 1, GUIDE 2 (N-50, N-50-K-S ONLY), GUIDE 3 AND GUIDE 4 ASSYS	90
12. PCB PARTS LIST	92

1. SERVICE PRECAUTIONS

1.1 NOTES ON SOLDERING

- A • For environmental protection, lead-free solder is used on the printed circuit boards mounted in this unit.
Be sure to use lead-free solder and a soldering iron that can meet specifications for use with lead-free solders for repairs accompanied by reworking of soldering.
- Compared with conventional eutectic solders, lead-free solders have higher melting points, by approximately 40 °C.
Therefore, for lead-free soldering, the tip temperature of a soldering iron must be set to around 373 °C in general, although the temperature depends on the heat capacity of the PC board on which reworking is required and the weight of the tip of the soldering iron.

Do NOT use a soldering iron whose tip temperature cannot be controlled.

- B Compared with eutectic solders, lead-free solders have higher bond strengths but slower wetting times and higher melting temperatures (hard to melt/easy to harden).

The following lead-free solders are available as service parts:

- Parts numbers of lead-free solder:
GYP1006 1.0 in dia.
GYP1007 0.6 in dia.
GYP1008 0.3 in dia.

C

D

E

F

2. SPECIFICATIONS

2.1 ACCESSORIES

- Remote control unit (8300764100010-IL)
- AC Power cord (N-50, N-30 :L068125130010-IL)
(N-50-K/-S, N-30-K/-S :L068250160020-IL)
- Operating instructions (N-50, N-30 :5707000006130-IL)
(N-50-K/-S, N-30-K/-S :5707000006140-IL)
(N-50-K/-S, N-30-K/-S :6517000000450-IL)
- Audio cable (L063102020050-IL)
- Warranty card (N-50-K/-S, N-30-K/-S :ARY7128)
- Safety sheet (N-50-K/-S, N-30-K/-S :5227000002330-IL)
- Caution sheet (N-50, N-30 :5227000002270-IL)
(N-50-K/-S, N-30-K/-S :5227000002280-IL)
- AAA/R03 dry cell battery x 2

2.2 SPECIFICATIONS

•Generalites

System	Network Audio Player
Power requirements	AC 120 V, 60 Hz (N-50, N-30)
Power requirements	AC 220 V to AC240V, 50/60 Hz (N-50-K/-S, N-30-K/-S)
Power consumption	
N-50, N-50-K/-S	34 W
N-30, N-30-K/-S	31 W
Power consumption (In standby mode)	0.3 W
Weight (without package)	
N-50, N-50-K/-S	7.3 kg (16.1 lb)
N-30, N-30-K/-S	5.0 kg (11 lb)
Dimensions	
N-50, N-50-K/-S	435 mm (W) x 99 mm (H) x 330 mm (D) (17 3/16 in. (W) x 3 15/16 in. (H) x 13 in. (D))
N-30, N-30-K/-S	435 mm (W) x 97.5 mm (H) x 330 mm (D) (17 3/16 in. (W) x 3 15/16 in. (H) x 13 in. (D))
Operating temperature	+5 °C to +35 °C
Operating humidity	5 % to 85 %

•Network

Ethernet interface	10 BASE-T/100 BASE-TX
DLNA	Ver 1.5 (DMP/DMR)

•Analog audio output

Output level (During audio output)	2 V rms (1 kHz, 0 dB)
Number of channels	2
Jack	RCA
Frequency response	4 Hz to 80 kHz -3 dB
Signal-to-Noise Ratio	
1 kHz, 0 dB, fs 192 kHz	>111 dB
Dynamic range	
1 kHz, 0 dB, fs 192 kHz	>111 dB
Total harmonic distortion	
1 kHz, 0 dB, fs 192 kHz	<0.002 %
Channel separation	
1 kHz, 0 dB, fs 192 kHz	>105 dB

•Digital audio output

Coaxial digital output	RCA jack
Optical digital output	Optical digital jack

•Digital audio input (N-50, N-50-K/-S only)

Coaxial digital input	RCA jack
Optical digital input	Optical digital jack
USB type-B	USB 2.0 HS



Note

- Specifications and the design are subject to possible modifications without notice, due to improvements.
- This product is not designed for use in Japan.

2.3 PLAYABLE FILE FORMATS

This unit supports the following file formats.

- A • Note that some file formats are not available for playback although they are listed as playable file formats.
- If an attempt is made to play files with unsupported formats, the sound may be intermittent or be accompanied by noise. In such cases, confirm that the file format is compatible with this unit.
- The compatibility of file formats varies depending on the type of server. Check with your server to ensure the compatibility of file formats supported by your server.
- B • Depending on the server, some file types not supported by this unit may be converted and output. For details, consult the server's operating instructions.
- Internet radio playback may be affected by the Internet communications environment, and in this case playback may not be possible even with the file formats listed here

Category Extension Stream

C			Sampling frequency	32kHz to 48kHz
			Quantization bitrate	16bit
MP3 *>1<	.mp3	MPEG-1 Audio Layer-3	Channel	2ch
			Bitrate	8kbps to 320kbps
D		VBR/CBR	Supported/ Supported	

Category Extension Stream

A	LPCM	—	LPCM	Sampling frequency	32kHz to 48kHz (Internet Radio)
		<*2>			44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 192 kHz (Digital In USB)
B				Quantization bitrate	16bit (Internet Radio)
					16bit, 24bit, 32bit (Digital In USB)
C				Channel	2ch
				Sampling frequency	32 kHz to 192kHz (Music Server)
					32kHz to 96kHz (USB)
				Quantization bitrate	16bit, 20bit, 24bit
D	WAV	.wav	LPCM	Channel	2ch
				Sampling frequency	32kHz to 48kHz
				Quantization bitrate	16bit
E	WMA	.wma	WMA2/7/8/9/10	Channel	2ch
				Bitrate	5kbps to 320kbps
				VBR/CBR	Supported/ Supported

Category	Extension	Stream	
AAC	.m4a	MPEG-4 AAC	Sampling frequency 32kHz to 48kHz
	.aac	MPEG-4 HE AAC	Quantization bitrate 16bit
	.3gp	(AAC Plus v1/2)	Channel 2ch
	.3g2		Bitrate 16kbps to 320kbps
		VBR/CBR	Supported/ Supported
			Sampling frequency 32 kHz to 192kHz (Music Server)
FLAC	.flac	FLAC	32kHz to 96kHz (USB)
			Quantization bitrate 16bit, 24bit
			Channel 2ch

*1 "MPEG Layer-3 audio decoding technology licensed from Fraunhofer IIS and Thomson multimedia."

*2 Only streaming data from servers is concerned, so there is no extension.

About network playback

The network playback function such as Internet Radio or Music Server of this unit uses the following technologies:

Windows Media Player

Windows Media Player 11/Windows Media Player 12.

Windows Media DRM

Microsoft Windows Media Digital Rights Management (WMDRM) is a platform to protect and securely deliver content for playback on computers, portable devices and network devices. Music Server functions as a WMDRM 10 for networked devices. WMDRM protected content can only be played on media servers supporting WMDRM.

Content owners use WMDRM technology to protect their intellectual property, including copyrights. This device uses WMDRM software to access WMDRM protected content. If the WMDRM software fails to protect the content, content owners may ask Microsoft to revoke the software's ability to use WMDRM to play or copy protected content. Revocation does not affect unprotected content. When you download licenses for protected content, you agree that Microsoft may include a revocation list with the licenses. Content owners may require you to upgrade WMDRM to access their content. If you decline an upgrade, you will not be able to access content that requires the upgrade.

This product is protected by certain intellectual property rights of Microsoft. Use or distribution of such technology outside of this product is prohibited without a license from Microsoft.

DLNA



DLNA CERTIFIED® Audio Player

A The Digital Living Network Alliance (DLNA) is a cross-industry organization of consumer electronics, computing industry and mobile device companies. Digital Living provides consumers with easy sharing of digital media through a wired or wireless network in the home.

The DLNA certification logo makes it easy to find products that comply with the DLNA Interoperability Guidelines. This unit complies with DLNA Interoperability Guidelines v1.5.

B When a PC running DLNA server software or other DLNA compatible device is connected to this player, some setting changes of software or other devices may be required. Please refer to the operating instructions for the software or device for more information.

DLNA®, the DLNA Logo and DLNA CERTIFIED® are trademarks, service marks, or certification marks of the Digital Living Network Alliance.

Content playable over a network

- Even when encoded in a compatible format, some files may not play correctly.
- Movie or Photo files cannot be played back.
- There are cases where you cannot listen to an Internet radio station even if the station can be selected from a list of radio stations.
- Some functions may not be supported depending on the server type or version used.
- Supported file formats vary by server. As such, files not supported by your server are not displayed on this unit. For more information check with the manufacturer of your server.

Disclaimer for Third Party Content

D ACCESS TO THIRD PARTY CONTENT SERVICES, INCLUDING ALL ASSOCIATED FEATURES AND FUNCTIONALITIES, IS PROVIDED "AS IS," "AS AVAILABLE" AND AT THE USER'S OWN RISK, WITHOUT WARRANTY OF ANY KIND. PIONEER DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, IN CONNECTION WITH ACCESS TO AND USE OF CONTENT SERVICES THROUGH THIS DEVICE, INCLUDING WITHOUT LIMITATION WARRANTIES OF MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT. PIONEER DOES NOT GUARANTEE, REPRESENT, OR WARRANT THAT CONTENT SERVICES WILL BE FREE FROM ERRORS, INTERRUPTION, LOSS, CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, OR OTHER SECURITY INTRUSION, AND PIONEER DISCLAIMS ANY LIABILITY IN CONNECTION WITH THE FOREGOING. PIONEER IS NOT LIABLE OR RESPONSIBLE FOR ANY LOSS OR DAMAGE ARISING

N-50/N-30 only

FROM ACCESS TO OR USE OF CONTENT. NO ORAL OR WRITTEN INFORMATION OR ADVICE GIVEN BY PIONEER OR ITS CUSTOMER SERVICES REPRESENTATIVES WILL CREATE ANY SUCH WARRANTY.

IN NO EVENT WILL PIONEER, ITS AFFILIATES, OR THEIR RESPECTIVE OFFICERS, DIRECTORS, OR EMPLOYEES BE LIABLE IN CONNECTION WITH YOUR USE OF THIRD PARTY CONTENT SERVICES THROUGH THIS DEVICE FOR PERSONAL INJURY OR SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES OF ANY KIND, INCLUDING WITHOUT LIMITATION DAMAGES FOR ATTORNEY'S FEES, LOST DATA OR LOST PROFITS, REGARDLESS OF THE THEORY OF LIABILITY AND WHETHER OR NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO EVENT WILL PIONEER'S TOTAL LIABILITY TO YOU FOR ALL DAMAGES ARISING FROM THE USE OR INABILITY TO USE THIRD PARTY CONTENT SERVICES (OTHER THAN AS MAY BE REQUIRED BY LAW IN CASES INVOLVING PERSONAL INJURY) EXCEED \$10.00. THE FOREGOING LIMITATIONS WILL APPLY EVEN IF THE ABOVE REMEDY FAILS OF ITS ESSENTIAL PURPOSE. IF ANY APPLICABLE AUTHORITY HOLDS ANY PORTION OF THIS SECTION TO BE UNENFORCEABLE, THEN LIABILITY WILL BE LIMITED TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW.

N-50/N-30 only

Disclaimer for Third Party Content

Access to content provided by third parties requires a high speed internet connection and may also require account registration and a paid subscription.

Third party content services may be changed, suspended, interrupted, or discontinued at any time without notice, and Pioneer disclaims any liability in connection with such occurrences.

Pioneer does not represent or warrant that content services will continue to be provided or available for a particular period of time, and any such warranty, express or implied, is disclaimed.

N-50-K-S, N-30-K-S only

About playback behavior over a network

- Playback may stall when the PC is switched off or any media files stored on it are deleted while playing content.
- If there are problems within the network environment (heavy network traffic, etc.) content may not be displayed or played properly (playback may be interrupted or stalled). For best performance, a 100BASE-TX connection between player and PC is recommended.
- If several clients are playing simultaneously, as the case may be, playback is interrupted or stalled.
- Depending on the security software installed on a connected PC and the setting of such software, network connection may be blocked.

Pioneer is not responsible for any malfunction of the player and/or the Music Server features due to communication error/malfunctions associated with your network connection and/or your PC, or other connected equipment. Please contact your PC manufacturer or Internet service provider.

Windows Media is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

This product includes technology owned by Microsoft Corporation and cannot be used or distributed without a license from Microsoft Licensing, Inc.

Microsoft®, Windows®7, Windows®Vista, Windows®XP, Windows®2000, Windows®Millennium Edition, Windows®98, and WindowsNT® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Authorizing this unit

In order to be able to play with Music Server, this unit must be authorized. This happens automatically when the unit makes a connection over the network to the PC. If not, please authorize this unit manually on the PC.

The authorization (or permission) method for access varies depending on the type of server currently being connected. For more information on authorizing this unit, refer to the instruction manual of your server.

aacPlus



The AAC decoder uses aacPlus developed by Coding Technologies
(www.codingtechnologies.com).

FLAC

FLAC Decoder

Copyright c 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007
Josh Coalson


Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the Xiph.org Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

About iPod/iPhone/iPad

Made for
iPod **iPhone** **iPad**



"Made for iPod", "Made for iPhone" and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance.

Apple, AirPlay, the AirPlay logo, iPad, iPhone, iPod, iPod shuffle, iPod nano, iPod classic, iPod touch, iTunes and Mac are trademarks of Apple, Inc., registered in the U.S. and other countries.

3. BASIC ITEMS FOR SERVICE

3.1 CHECK POINTS AFTER SERVICING

- A To keep the product quality after servicing, confirm recommended check points shown below.

No.	Procedures	Check points
1	Confirm a firmware version at test mode.	Should be the latest firmware version. If not, update the version.
2	Confirm whether the customer complain has been solved. If the indicated complain is caused by a specific file format, replay a music file for test of the same format as target file.	The customer complain must not be reappeared. No abnormalities should exist in screen displayed contents, audio and actions.
3	Confirm replay of a music file for test with the same format as corresponding file format at the front USB terminal. (Confirm music files with all file formats should be replayed.)	No abnormalities should exist in actions such as audio, screen display, etc.
4	Check the external package	No scratches or dirt on its appearance after receiving it for service.

B A music file for test with corresponding file format should be used after downloading from the service dedicated Web Site onto an USB memory, etc.

C See the table below for the items to be checked regarding audio.


Item to be checked regarding audio
Distortion
Noise
Volume too low
Volume too high
Volume fluctuating
Sound interrupted

D

E

F

3.2 PCB LOCATIONS

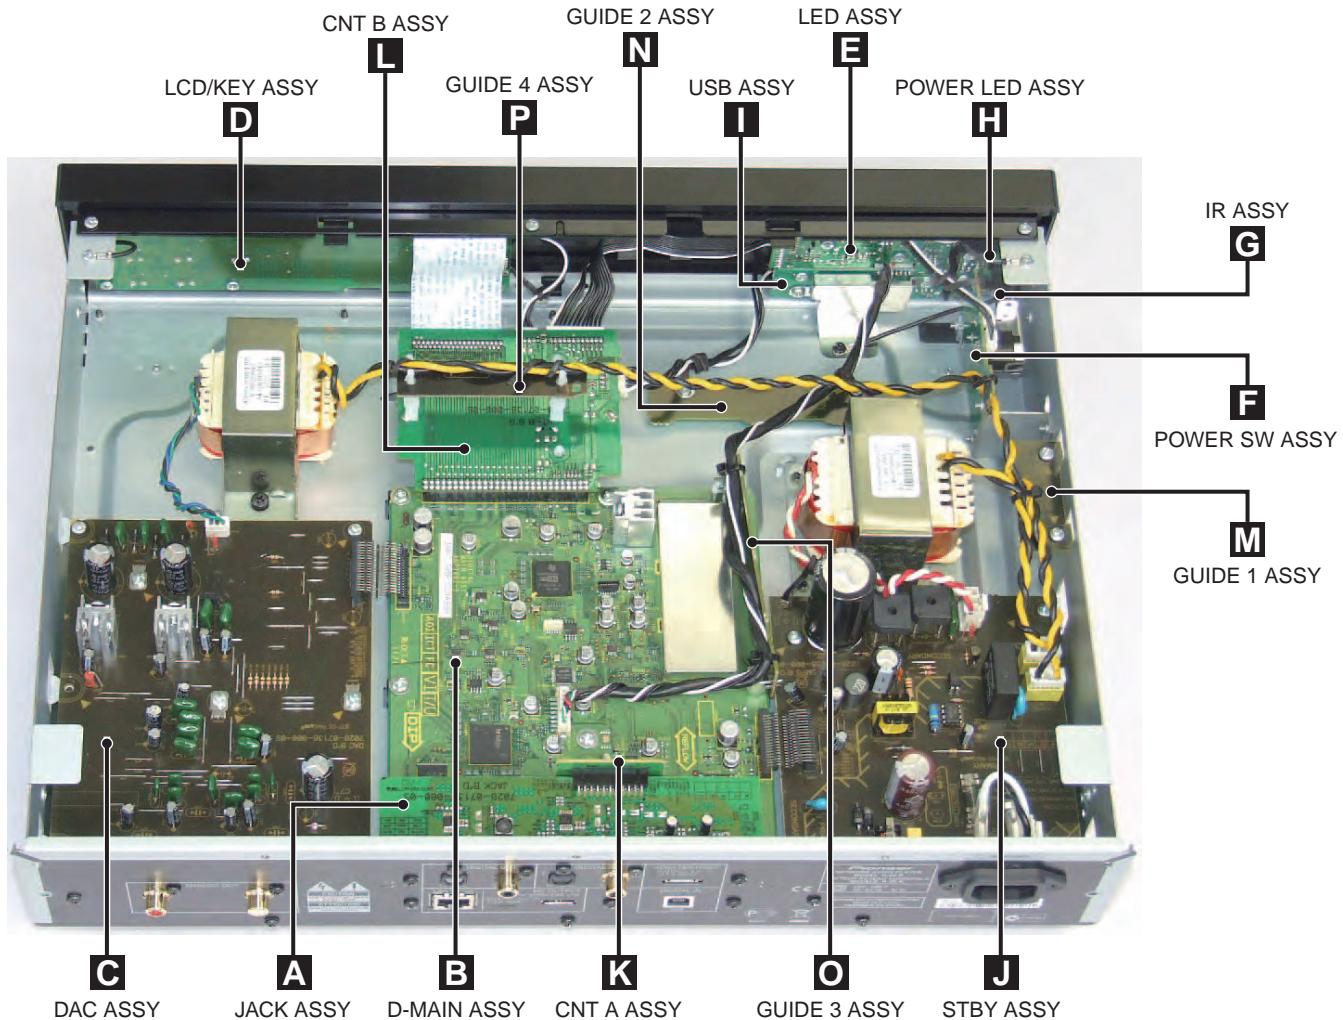

A

B

C

D

E

F

NOTES: • Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

- The mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

A

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.	
LIST OF ASSEMBLIES								
NSP	1..	TTL ASSY D-MAIN(N-50)	7025HU1103040-IL	NSP	1..	TTL ASSY DAC(N-30)	7025HU1102032-IL	
	2..	D-MAIN ASSY	7028071361010-IL		2..	GUIDE 4 ASSY	702807138B010-IL	
NSP	1..	TTL ASSY D-MAIN(N-50-K/S)	7025HU1103030-IL		2..	DAC ASSY	7028071381020-IL	
	2..	D-MAIN ASSY	7028071361010-IL		2..	STBY ASSY	7028071382030-IL	
NSP	1..	TTL ASSY D-MAIN(N-30)	7025HU1102030-IL		2..	LED ASSY	7028071383020-IL	
	2..	D-MAIN ASSY	7028071361020-IL		2..	POWER LED ASSY	7028071384010-IL	
B	NSP	1..	TTL ASSY D-MAIN(N-30-K/S)	7025HU1102040-IL		2..	POWER SW ASSY	7028071385010-IL
	2..	D-MAIN ASSY	7028071361020-IL		2..	IR ASSY	7028071386010-IL	
NSP	1..	TTL ASSY USB(N-50)	7025HU1103041-IL		2..	GUIDE 3 ASSY	7028071387010-IL	
	2..	USB ASSY	7028071371010-IL		2..	CNT B ASSY	7028071388010-IL	
NSP	1..	TTL ASSY USB(N-50-K/S)	7025HU1103031-IL		2..	GUIDE 1 ASSY	7028071389010-IL	
	2..	USB ASSY	7028071371010-IL		1..	TTL ASSY DAC(N-30-K/S)	7025HU1102042-IL	
NSP	1..	TTL ASSY USB(N-30)	7025HU1102031-IL		2..	GUIDE 4 ASSY	702807138B010-IL	
	2..	USB ASSY	7028071371010-IL		2..	DAC ASSY	7028071381020-IL	
C	NSP	1..	TTL ASSY USB(N-30-K/S)	7025HU1102041-IL		2..	STBY ASSY	7028071382040-IL
	2..	USB ASSY	7028071371010-IL		2..	LED ASSY	7028071383020-IL	
NSP	1..	TTL ASSY DAC(N-50)	7025HU1103042-IL		2..	POWER LED ASSY	7028071384010-IL	
	2..	GUIDE 2 ASSY	702807138A010-IL		2..	POWER SW ASSY	7028071385010-IL	
	2..	GUIDE 4 ASSY	702807138B010-IL		2..	IR ASSY	7028071386010-IL	
	2..	DAC ASSY	7028071381010-IL		2..	GUIDE 3 ASSY	7028071387010-IL	
	2..	STBY ASSY	7028071382010-IL		2..	CNT B ASSY	7028071388010-IL	
	2..	LED ASSY	7028071383010-IL		2..	GUIDE 1 ASSY	7028071389010-IL	
D	NSP	1..	GUIDE 2 ASSY	702807138A010-IL	NSP	1..	TTL ASSY JACK(N-50)	7025HU1103043-IL
	2..	GUIDE 4 ASSY	702807138B010-IL		2..	JACK ASSY	7028071391010-IL	
	2..	DAC ASSY	7028071381010-IL		2..	LCD/KEY ASSY	7028071392010-IL	
	2..	STBY ASSY	7028071382020-IL		2..	CNT A ASSY	7028071393010-IL	
	2..	LED ASSY	7028071383010-IL		1..	TTL ASSY JACK(N-30-K/S)	7025HU1102033-IL	
	2..	POWER LED ASSY	7028071384010-IL		2..	JACK ASSY	7028071391020-IL	
E	NSP	1..	POWER SW ASSY	7028071385010-IL		2..	LCD/KEY ASSY	7028071392010-IL
	2..	IR ASSY	7028071386010-IL		2..	CNT A ASSY	7028071393010-IL	
	2..	GUIDE 3 ASSY	7028071387010-IL	NSP	1..	TTL ASSY JACK(N-30-K/S)	7025HU1102043-IL	
	2..	CNT B ASSY	7028071388010-IL		2..	JACK ASSY	7028071391020-IL	
	2..	GUIDE 1 ASSY	7028071389010-IL		2..	LCD/KEY ASSY	7028071392010-IL	

3.3 JIGS LIST

F

Name	Jig No.	Remarks
Service Remote Control Unit	GGF1381	Adjustment, Diagnosis

5

6

7

8

A

B

C

D

E

F

N-50

5

6

7

8

13


4. BLOCK DIAGRAM

4.1 OVERALL CONNECTION DIAGRAM (1/2)

A

J STBY ASSY

(N-50 :7028071382010-IL)
 (N-50-K/-S :7028071382020-IL)
 (N-30 :7028071382030-IL)
 (N-30-K/-S :7028071382040-IL)

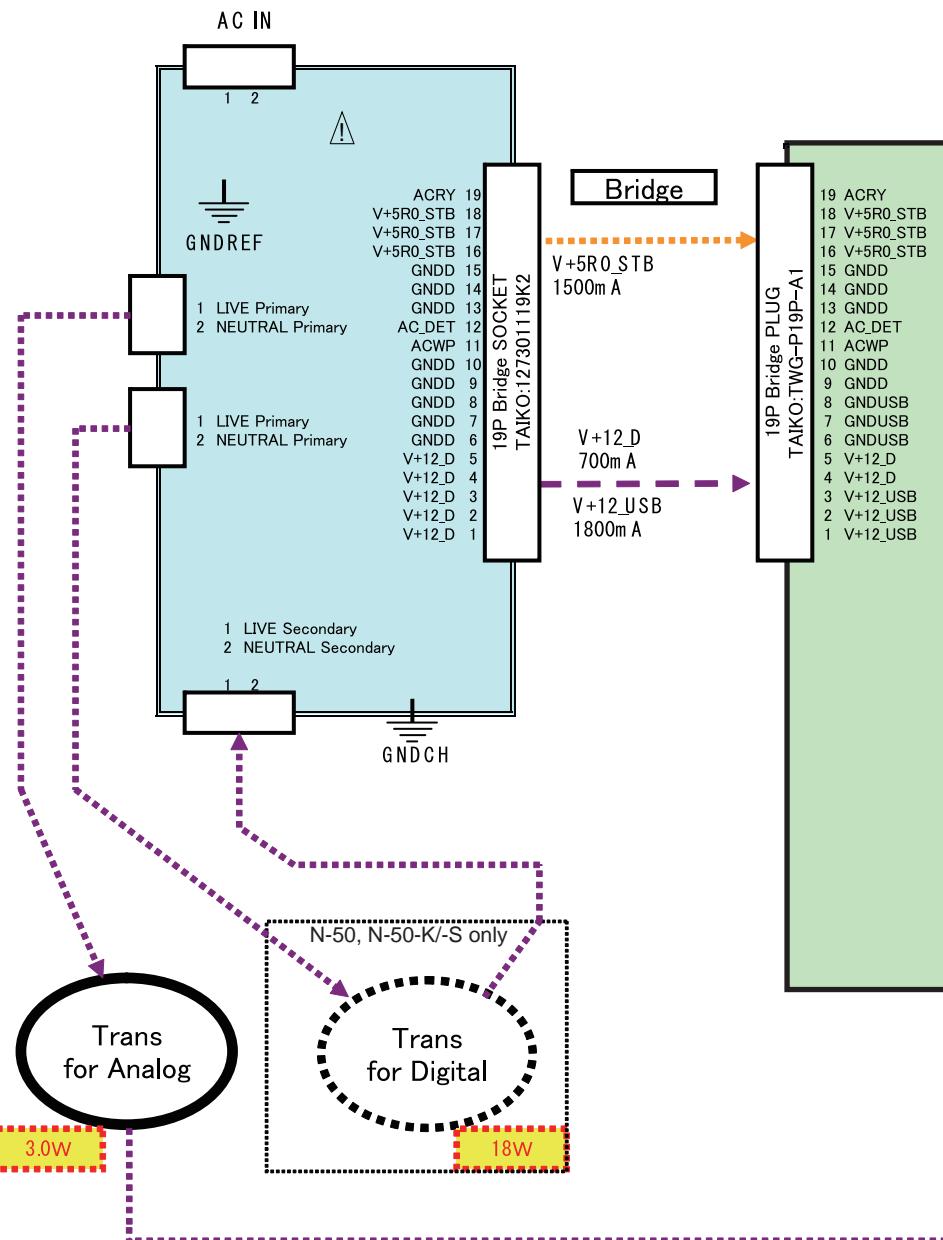

B

A JACK ASSY

(N-50, N-50-K/-S:702
 (N-30, N-30-K/-S:702

10	GNDA	21	SPDIF_OUT
9	L_IN_A_BT	20	V+3R3_D
8	GNDA	19	V+3R3_D
7	R_IN_A_BT	18	SPDIF_IN_CAX
6	GNDA	17	GNDD
5	GNDA	16	SPDIF_IN_OPT
4	Rx_BT/Tx_U	15	GNDD
3	Tx_BT/Rx_U	14	NC
2	XDET_BT	13	GNDA
1	ID_BT	12	V+5R0_BT
		11	V+5R0_BT


21P Board to Board Jack(Rec
 COSMOS 1.25mm pitch)

V+3R3_D
 9m A

V+5I
 100n

K CNT A AS

(7028071

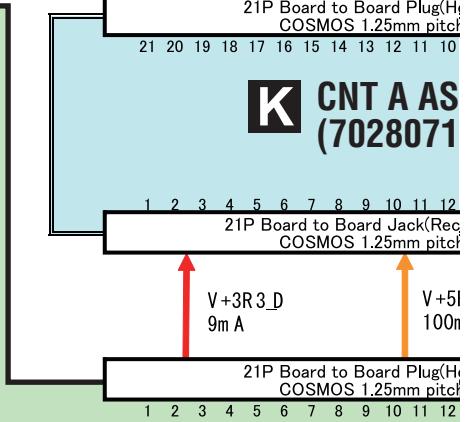

C

1	SPDIF_OUT
2	V+3R3_D
3	V+3R3_D
4	SPDIF_IN_CAX
5	GNDD
6	SPDIF_IN_OPT
7	GNDD
8	NC
9	GNDA
10	V+5R0_BT
11	V+5R0_BT
12	GNDA
13	L_IN_A_BT
14	GNDA
15	R_IN_A_BT
16	GNDA
17	GNDA
18	Rx_BT/Tx_U
19	Tx_BT/Rx_U
20	XDET_BT
21	ID_BT


GND CI

D


E

F


**0-K/-S:7028071391010-IL)
0-K/-S:7028071391020-IL)**

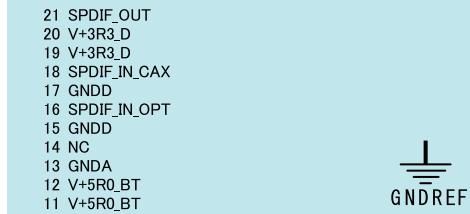


Board to Board



**CNT A ASSY
(7028071393010-IL)**

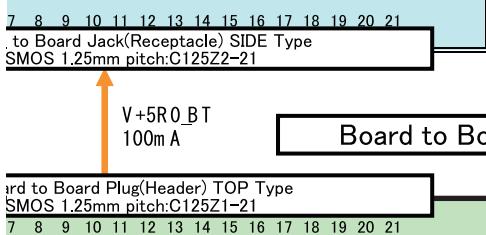

Board to Board




B (B1/5 - B5/5)

D-MAIN ASSY (1/2)
(N-50, N-50-K/-S:7028071361010-IL)
(N-30, N-30-K/-S:7028071361020-IL)

Cable

C DAC ASSY
(N-50, N-50-K/-S:7028071381010-IL)
(N-30, N-30-K/-S:7028071381020-IL)

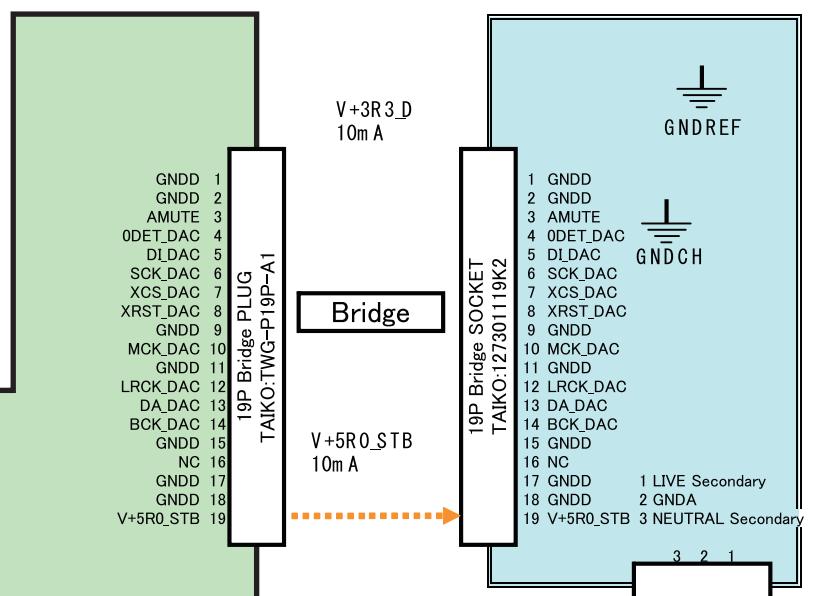

- When ordering service parts, be sure to refer to "EXPLODED VIEWS and PARTS LIST" or "PCB PARTS LIST".
- The mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

4.2 OVERALL CONNECTION DIAGRAM (2/2)

M GUIDE 1 ASSY
(7028071389010-IL)

N GUIDE 2 ASSY
(N-50, N-50-K/-S:7028071361010-IL)

O GUIDE 3 ASSY
(7028071387010-IL)

P GUIDE 4 ASSY
(702807138B010-IL)

B (B1/5 - B5/5)


D-MAIN ASSY (2/2)
(N-50, N-50-K/-S:7028071361010-IL)
(N-30, N-30-K/-S:7028071361020-IL)

- 1 V+
- 2 GN
- 3 V+
- 4 GN
- 5 PO
- 6 LEI
- 7 LEI
- 8 LEI
- 9 LEI
- 10 GN
- 11 PW
- 12 GN
- 13 RE
- 14 GN
- 15 V+
16 V-
17 V-
18 GN
- 19 GN
- 20 KE
- 21 KE
- 22 XR
- 23 DO
- 24 DI
- 25 CL
- 26 XC
- 27 GN
- 28 PW



L CNT B ASSY
(7028071388010-IL)



H POWER LED ASSY
(7028071384010-IL)

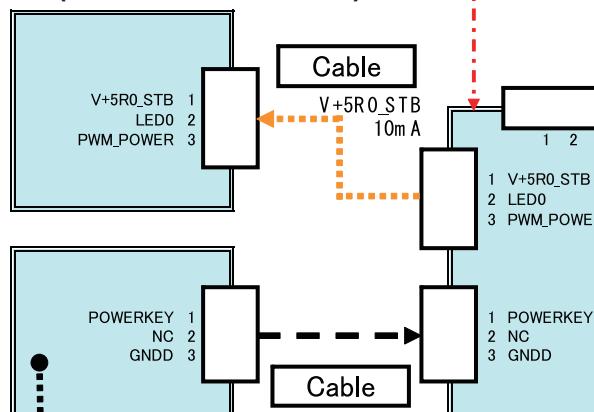

G IR ASSY
(70280713)

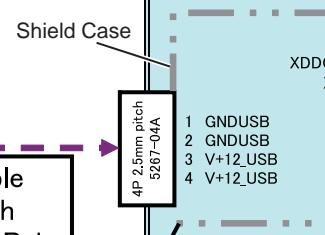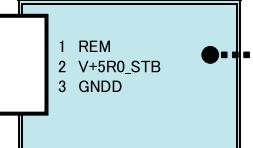

F POWER SW ASSY
(7028071385010-IL)

E LED ASSY
(N-50, N-50-K/-S:7028071383010-IL)
(N-30, N-30-K/-S:7028071383020-IL)

Direct connection(Chass)

10-IL 20-IL

1 V+12_USB 29 GNDD
2 GNDUSB 30 R5_LCD
3 V+12_USB 31 R4_LCD
4 GNDUSB 32 R3_LCD
5 POWERKEY 33 R2_LCD
6 LED0 34 R1_LCD
7 LED1 35 R0_LCD
8 LED2 36 GNDD
9 LED3 37 G5_LCD
10 GNDD 38 G4_LCD
11 PWM_LED 39 G3_LCD
12 GNDD 40 G2_LCD
13 REM 41 G1_LCD
14 GNDD 42 G0_LCD
15 V+5R0_STB 43 GNDD
16 V+5R0_LCD 44 B5_LCD
17 V+3R3_STB 45 B4_LCD
18 GNDD 46 B3_LCD
19 GNDD 47 B2_LCD
20 KEY1 48 B1_LCD
21 KEY2 49 B0_LCD
22 XRST_LCD 50 GNDD
23 DO_LCD 51 VSYNC_LCD
24 DI_LCD 52 HSYNC_LCD
25 CLK_LCD 53 DE_LCD
26 XCS_LCD 54 GNDD
27 GNDD 55 PCLK_LCD
28 PWM_LCD 56 GNDD

1 XDDCERR_USB_F
2 XERR_USB_F
3 POW_USB_F
4 NC
5 GNDD
6 GNDS
7 USB_F-
8 USB_F+

8 7 6 5 4 3 2 1
SP cable connector SMT
YEHNHO 2mm pitch.20022WS-08


SB
JSB
JSD

IR ASSY (7028071386010-IL)



GNDCH

Cable
with
Twist Pair
with
Shield

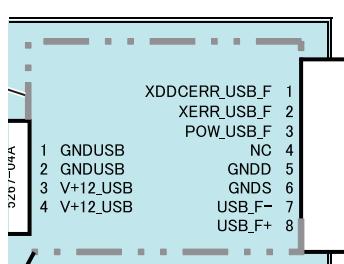

USB ASSY

(7028071371010-IL)

Connection(Chassis ↔ Shield Case)

Board to Board

V+3R3_STB
90mA

V+5R0_LCD
100mA

V+5R0_STB
40mA

V+12_USB
1800mA

56P Board to Board Jack(Receptacle) 2line TOP Type
COSMOS 2.54mm pitch C12542-5025-56G

FFC

1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39 41 43 45 47 49 51 53 55
2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50 52 54 56

1 GND 21 G4_LCD
2 KEY1 22 G3_LCD
3 KEY2 23 G2_LCD
4 NC 24 G1_LCD
5 XRST_LCD 25 G0_LCD
6 NC 26 GNDD
7 SDA_LCD 27 B5_LCD
8 SCL_LCD 28 B4_LCD
9 XCS_LCD 29 B3_LCD
10 GNDD 30 B2_LCD
11 PWM_LCD 31 B1_LCD
12 GNDD 32 B0_LCD
13 R5_LCD 33 GNDD
14 R4_LCD 34 VSYNC_LCD
15 R3_LCD 35 HSYNC_LCD
16 R2_LCD 36 DE_LCD
17 RI_LCD 37 GNDD
18 RO_LCD 38 PCLK_LCD
19 GNDD 39 GNDD
20 G5_LCD

39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

4 3 2 1

V+3R3_STB
90mA

V+5R0_LCD
100mA

Cable


GNDCH


D LCD/KEY ASSY (7028071392010-IL)

1 GND 21 G4_LCD
2 GND 22 G3_LCD
3 V+3R3_STB 23 G2_LCD
4 V+5R0_LCD 24 G1_LCD

5 GND 25 G0_LCD

4.3 BLOCK DIAGRAM

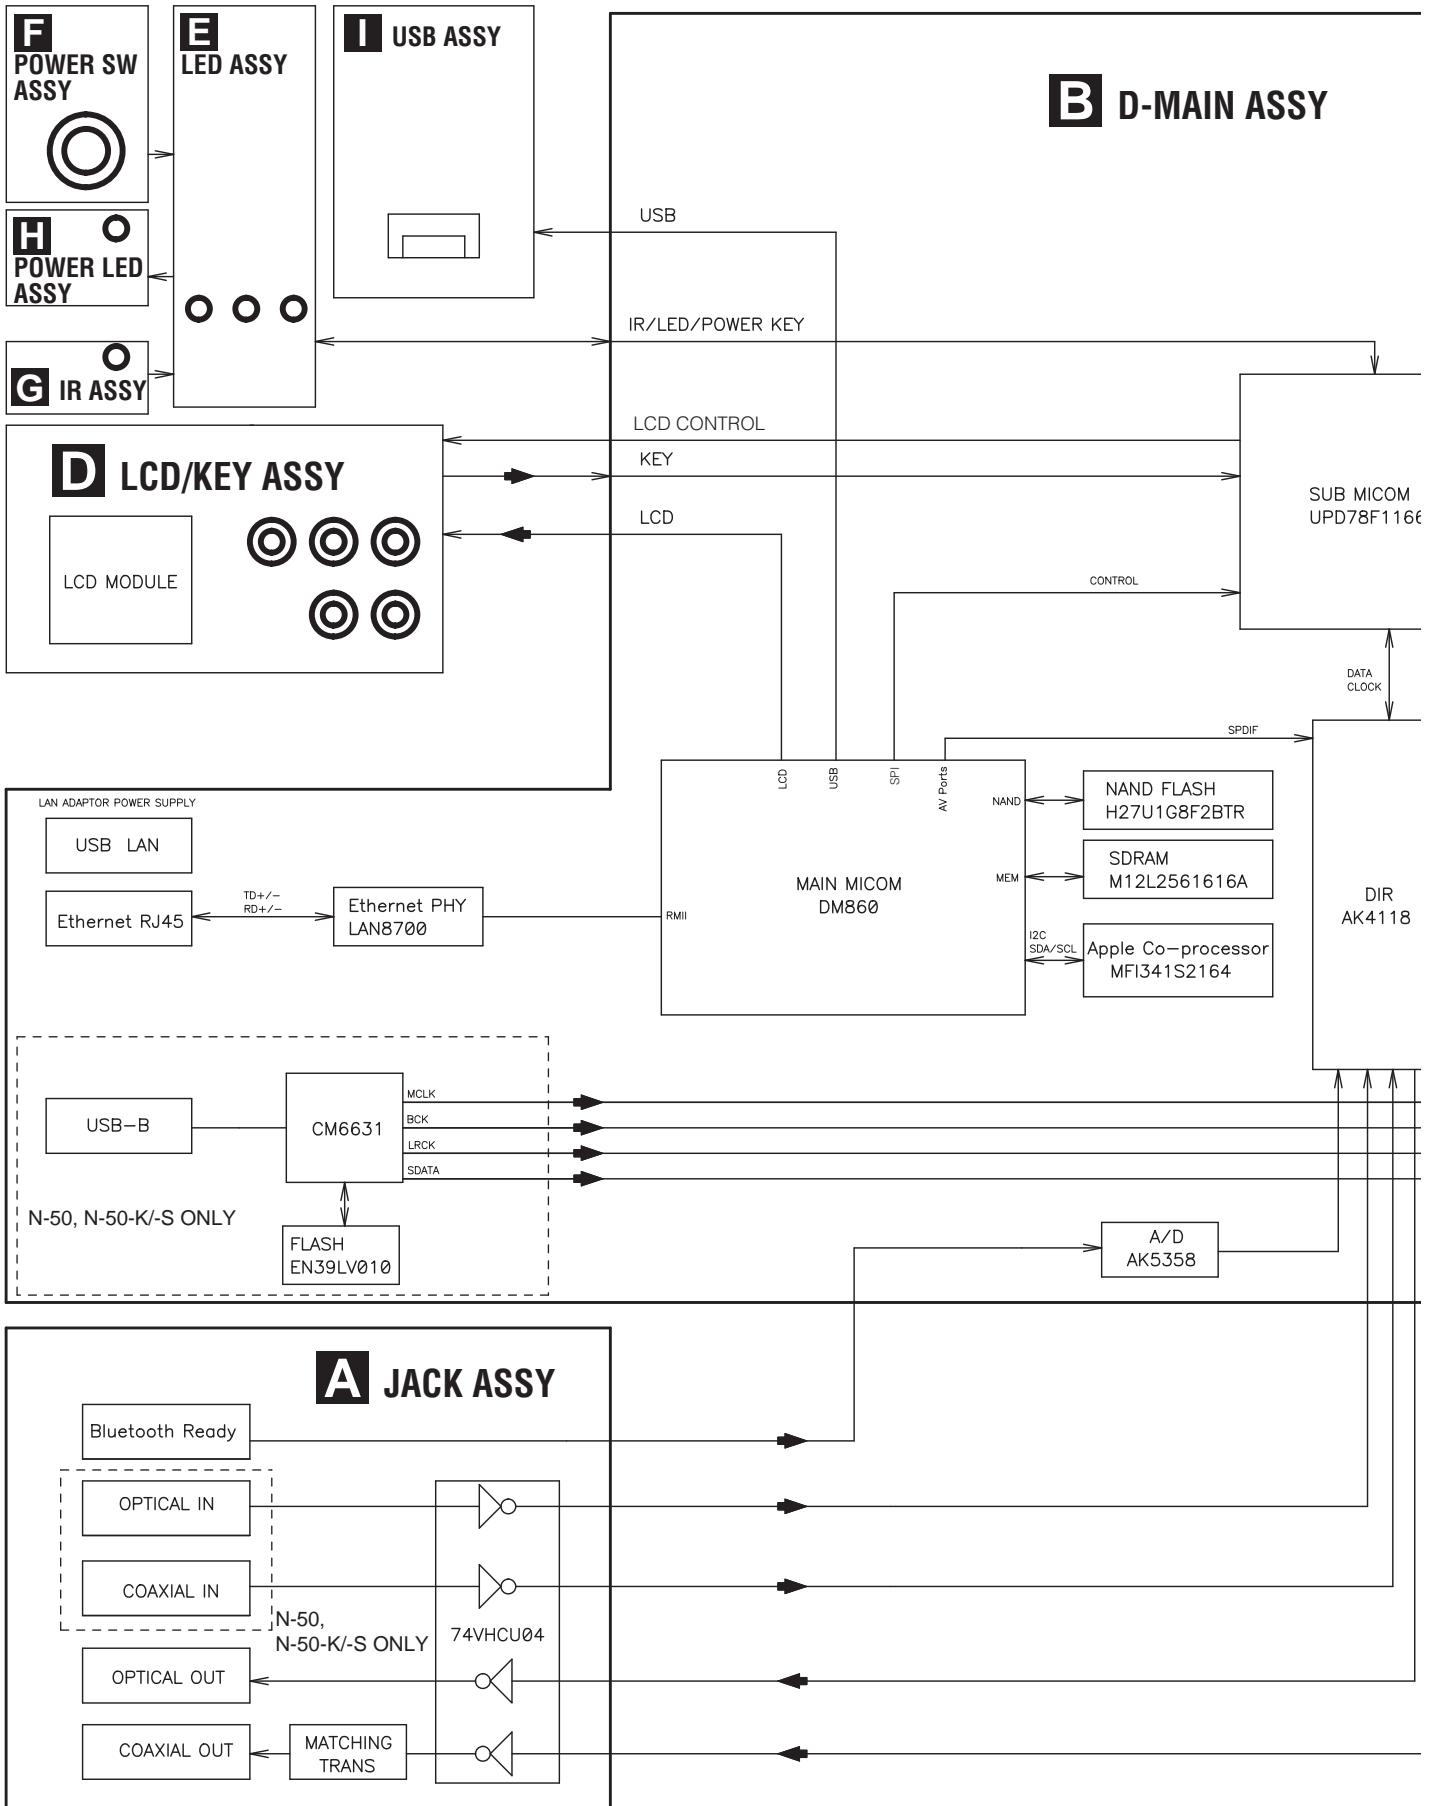


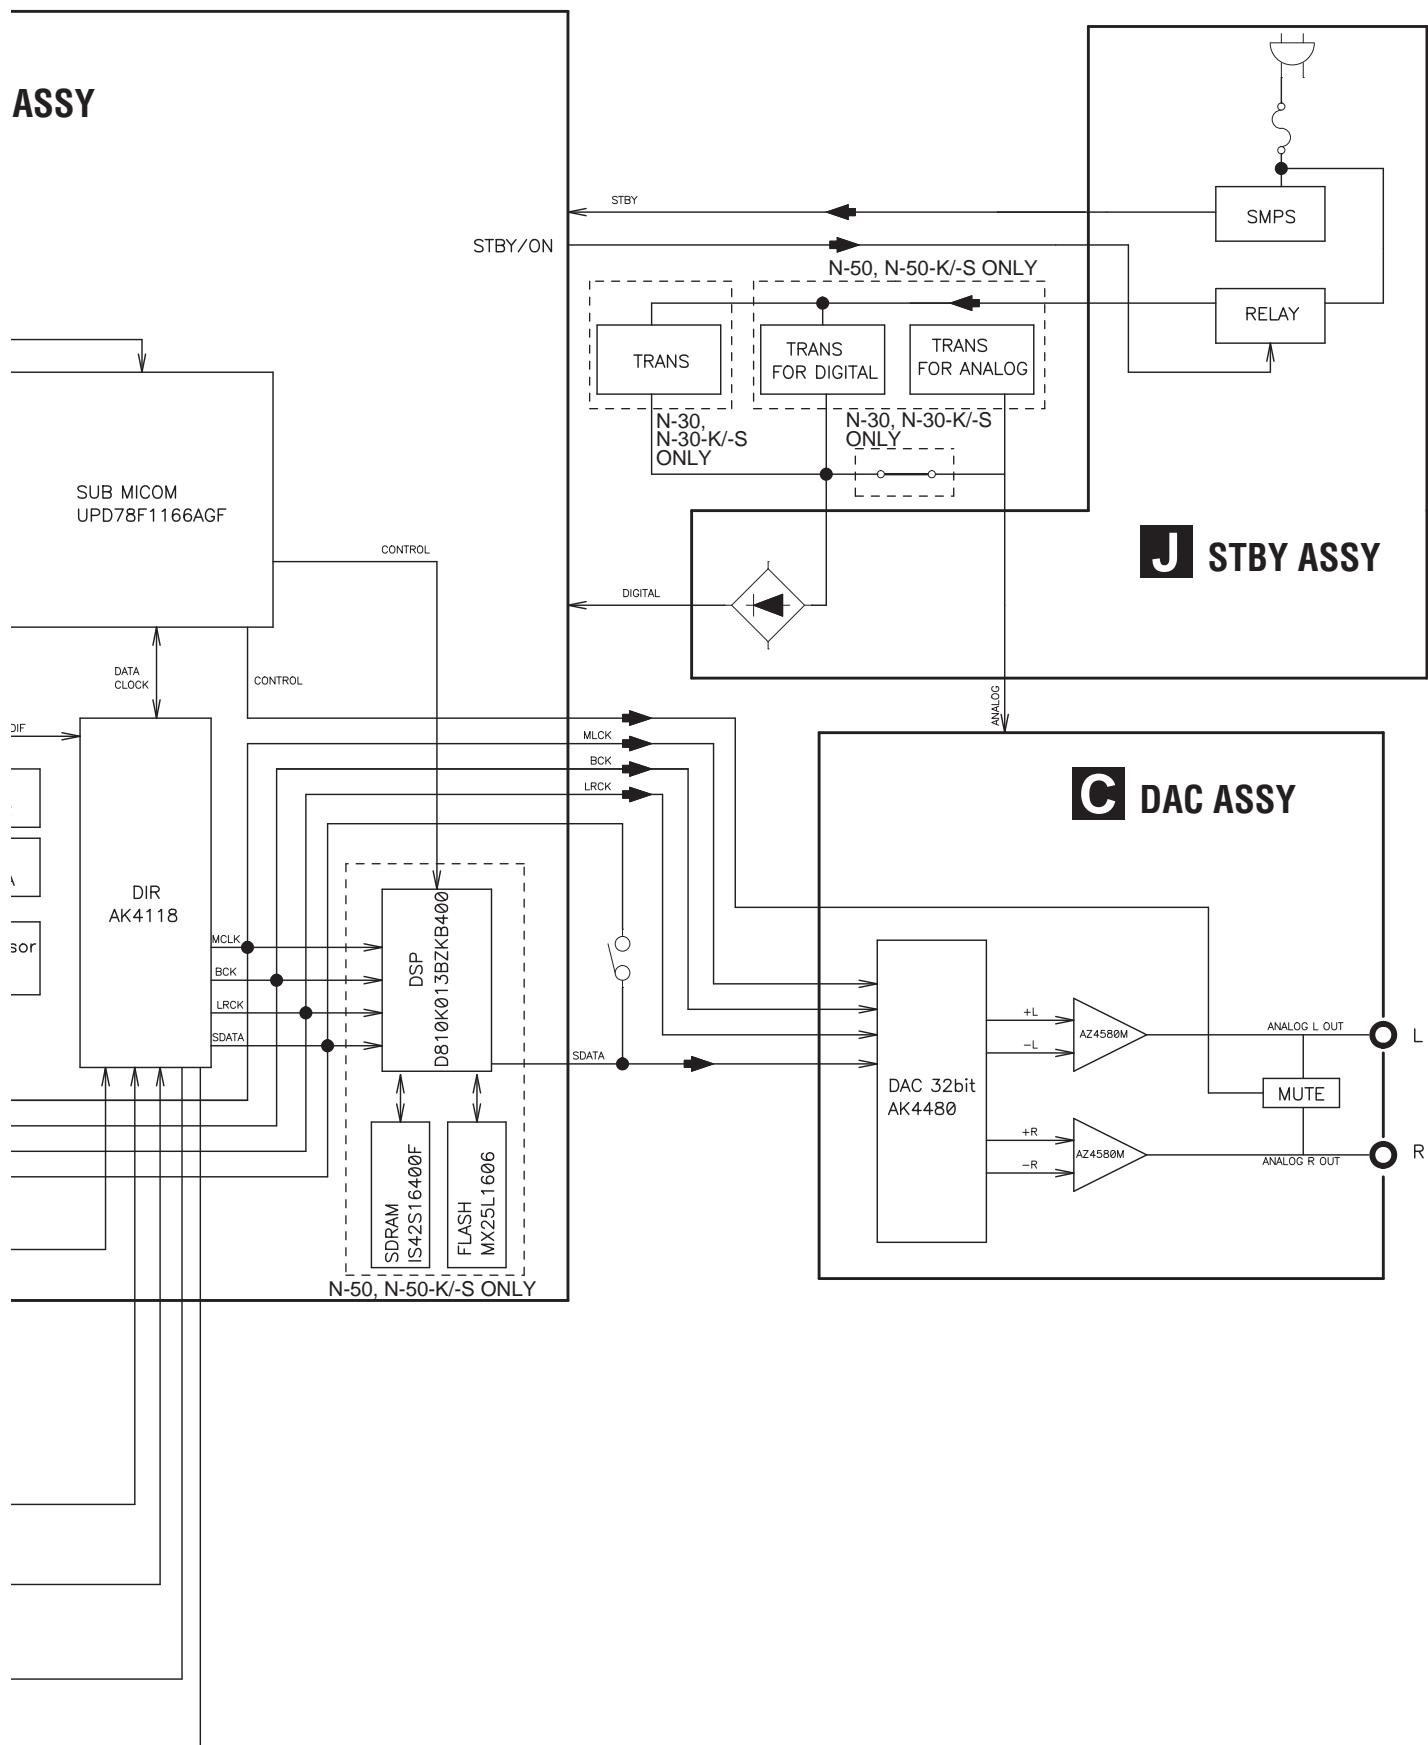
ASSY

5. DIAGNOSIS

5.1 TROUBLESHOOTING

A No sound comes out.

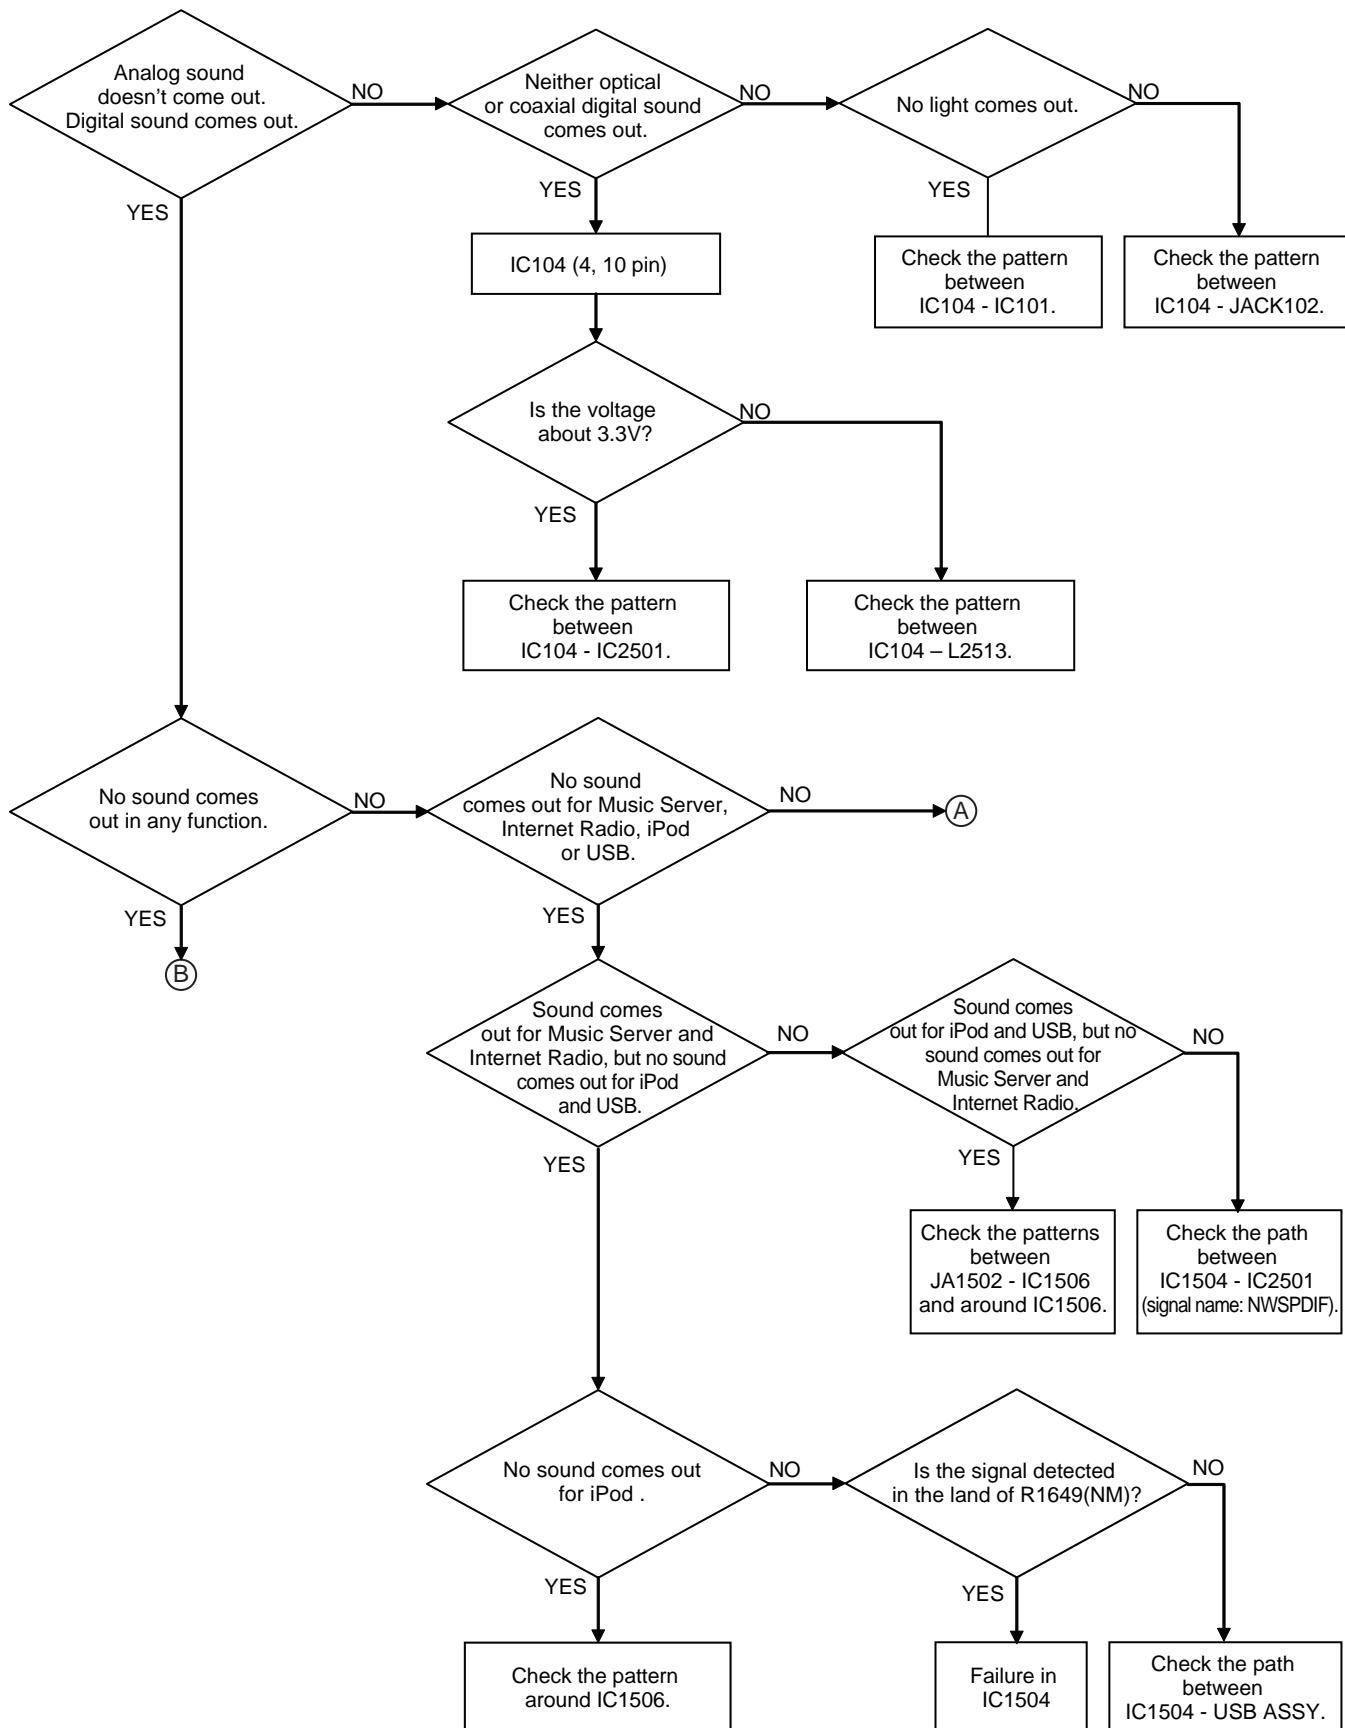

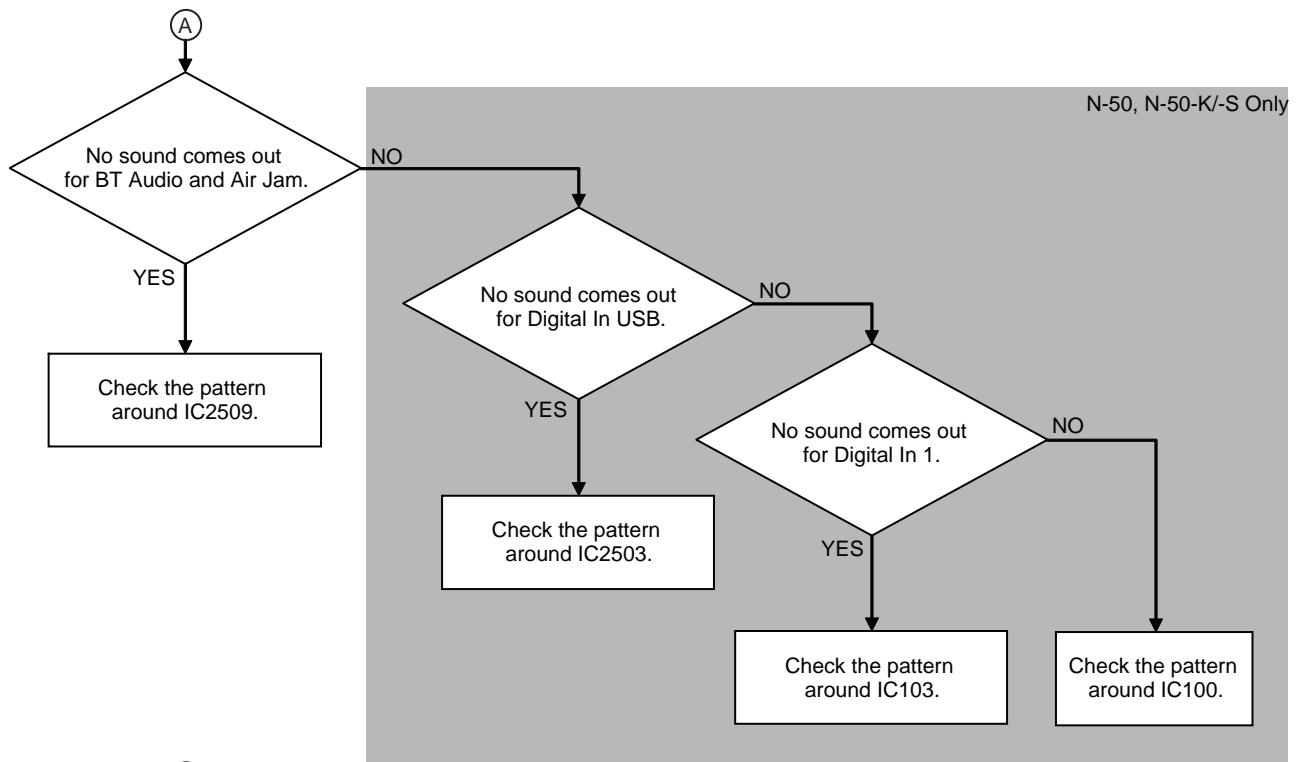

(B)

N-30, N-30-K/-S

N-50, N-50-K/-S Only

Sound comes out in the PURE AUDIO mode.

N-50, N-50-K/-S
YES

Check the pattern between JA1502 - IC1506 and the pattern around IC1506.

N-50, N-50-K/-S
NO

Check MCK_DAC, LRCK_DAC, DA_DAC and BCK_DAC of CN2502.

Is the signal detected?


YES

Check DAC ASSY.

NO

Check around IC2505 and IC2506.

No power comes on.

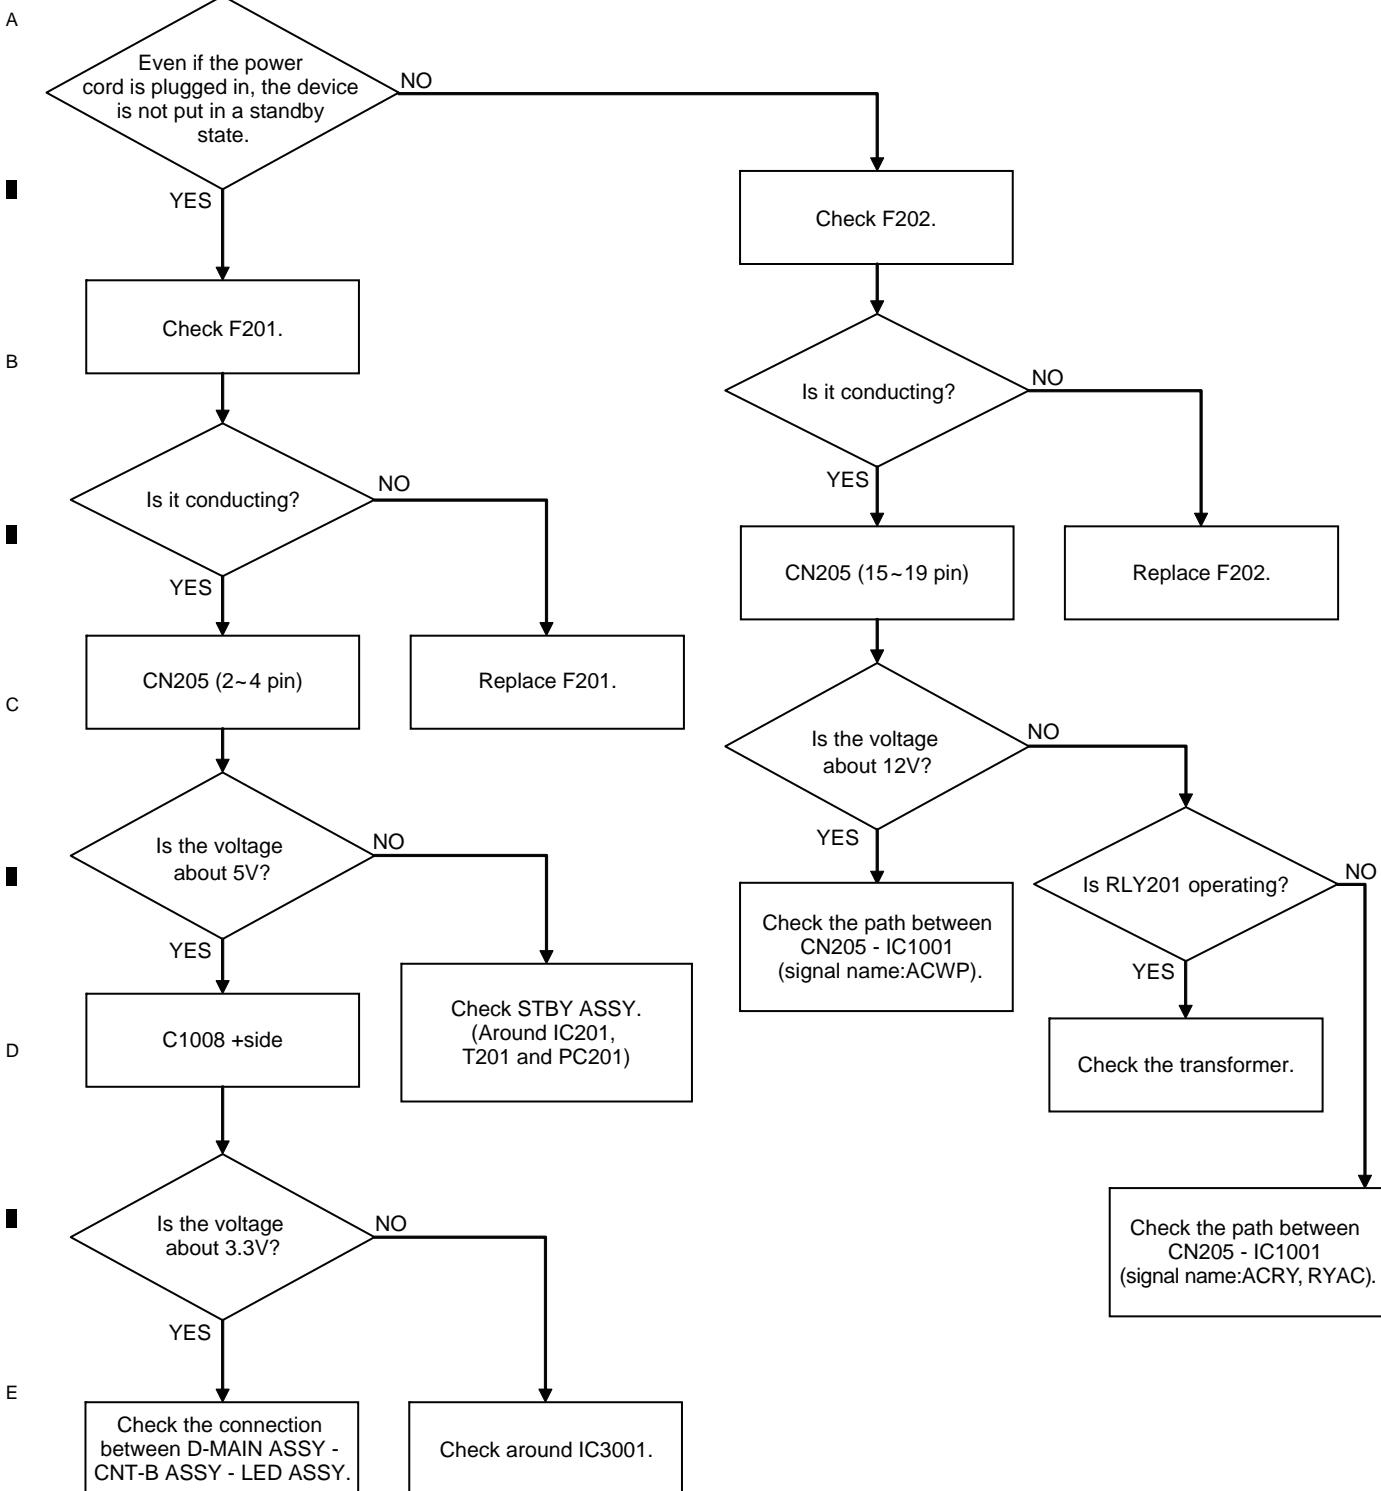

5.2 PROTECTION CIRCUIT ERROR DETECTION

Item	GUI display	LED display	Number of NGs	Detection method	Processing after detection	Return processing	Remark
AC Detection	-	-	-	The presence or absence of power supply is detected. At the same time, occurrence of AC instantaneous interruption is also detected. AC_DET (Sub/IC1001-81 pin) "H" detection	After detection, execute AC_OFF processing, and the power is turned OFF.		
BT Module Over Current Detection	BT error 5	BT OL (0 to 255 displayed)		Overcurrent in the power supply to BT Module is detected. The assumption is a failure in Module. XERR_BT (Main/IC1504-Y14 pin) "L" detection	1) Mute On 2) Error display at GUI 3) Transit POW_BT/IC1504-W14 pin to Low, and the keys other than the Standby/On key become invalid.	Power OFF → Power ON effects a return.	In the event of UART communication error with the BT module, BT error 5 is displayed.
WiFi Module Over Current Detection	Error 8	USB_W_ERR (0 to 255 displayed)		Overcurrent in the power supply to WiFi Module (Wireless LAN Converter) is detected. The assumption is a failure in Module. XERR_USB_W (Sub/IC1001-3 pin) "L" detection	1) Transit POW_USB_W (IC1001-16 pin) to Low. 2) Error is displayed at GUI (not displayed when the detection is confirmed during a high-speed startup Standby), and the keys other than the Standby/On key become invalid.	Power OFF → Power ON effects a return.	Since POW_USB_W remains in High to turn ON the power by Control/App, the detection continues even after the transition to the high-speed startup Standby. When the detection is confirmed during the high-speed startup Standby, transit POW_USB_W to Low. After that, when the power is turned ON POW_USB_W is set to High and after a lapse of 10 ms, the detection starts again.
Front USB Over Current Detection	USB overcurrent Error 7	USB (0 to 255 displayed)		Overcurrent in the power supply to Front USB(iPod/iPhone/iPad/USB memory) is detected. The assumption is a failure in Module. XERR_USB_F (Main/IC1504-D2 pin) "L" detection	1) Transit POW_USB_F(IC1001-22 pin) to Low. 2) Error is displayed at GUI, and the keys other than the Standby/On key become invalid.	Power OFF → Power ON effects a return.	
Front USB Over Voltage Detection	-	Standby LED	-	Overcurrent in the power supply to Front USB(iPod/iPhone/iPad/USB memory) is detected. The assumption is a failure in DCDC Converter. XDDCERR_USB_F (Sub/IC1001-40 pin) "L" detection	Immediately shut down.	Not returnable Only releasing method described below	This protection operation is intended for protection of the external connection equipment against a failure within the body. The device is put in the unreturnable state in the event of an error.

[Releasing method for the power ON disabled state]

Input "ESC(A85F)" → "TEST(A85E)" on the service remote controller (GGF1381).

5.3 HOW TO CHECK THE IC COMMUNICATION

The Major IC (MainCPU, SubCPU, DSP, DIR, DAC, etc.) communications checking method

A The communications status with each LSI can be checked as follows:

■ Communications of MainCPU \leftrightarrow SubCPU

In about one minute after the Power ON, the function screen appears. If the display is switched by change-over of functions, there is no problem in the communications.

■ Communications of SubCPU \leftrightarrow DSP (N-50, N-50-K-S only)

In the event of DSP communications error, "Error 9" is displayed on the LCD.

If "Error 9" is not displayed, the communications have been established.


■ Communications of SubCPU \leftrightarrow DIR

Select DigitalIn1, and when the sound input to DigitalIn1 is output from Opt or Coax, the communications have been established.


5.4 IC INFORMATION

J040-22601-001-0S (POWER SWITCH)

Block Diagram

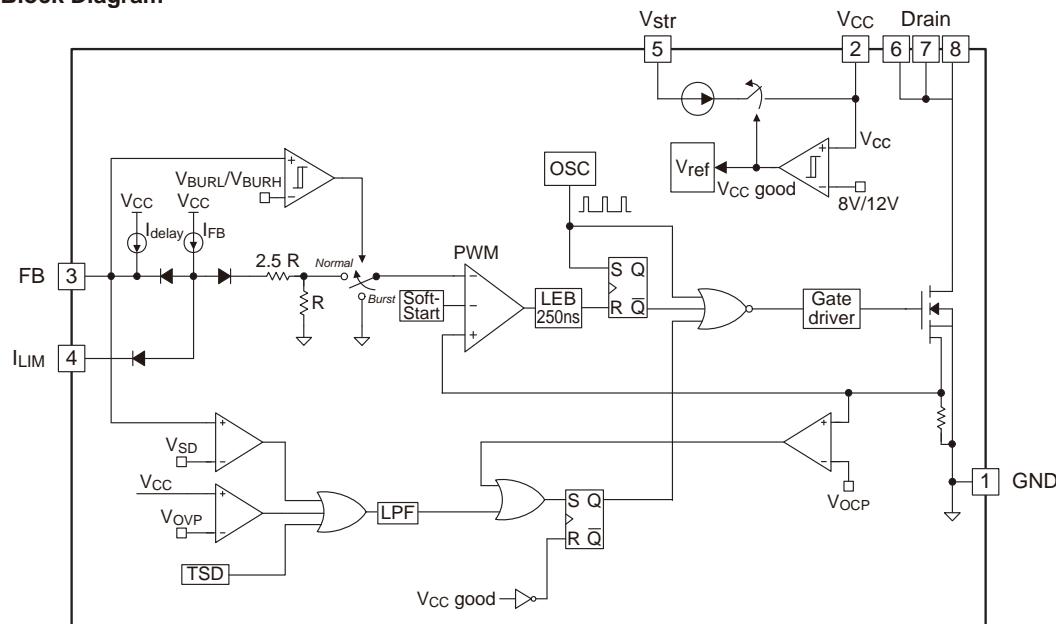

Pin Layout

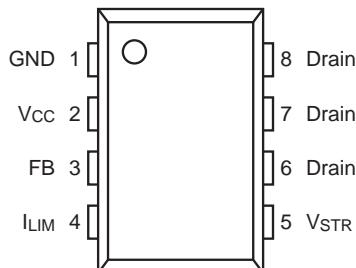

Pin Definitions

Pin No.	Pin Name	Description
1	GND	Ground
2	Vcc	Power Supply
3	FB	Feedback
4	ILIM	Peak Current Limit
5	VSTR	Startup
6,7,8	Drain	SenseFET Drain

6. SERVICE MODE

6.1 SERVICE MODE

1. Service Mode

A

When the device is put in the Service Mode, the dedicated menu starts up.

As long as the menu is open, the Service Mode is in operation.

The items implemented by the menu are as follows:

- Check of Versions for MainCPU / SubCPU / DSP
- Check of Model Information (For which is SubCPU in operation, N-30(N-30-K/-S) or N-50(N-50-K/-S)?)
- Check of Network Information
- Update of USB for MainCPU / SubCPU
- Check of the number of protection circuit detections and clear
- Factory Setting

B

In the Service Mode, the protection circuit detection operates in the same way as during in the normal operation.

2. How to enter the Service Mode

C

Enter "ESC(A85F)" → "+10(A81F)" on the service remote controller GGF1381 while the power of the Main Unit is ON, and the menu for the Service Mode starts up.

- * If any input from another remote controller is made between "ESC" and "+10", the Service Mode is not entered.
The entry status of the "ESC" key is cleared at the time of Power OFF.

3. How to leave the Service Mode

D

When the menu is left, the Service Mode exits.

The menu is left by switching of functions, Power OFF or the return key input on the top-end layer of the menu.

4. Menu


E

The operation of the menu shall be conducted with the cursor keys of the product's remote controller.

Use the Enter key for selection of an item and use the Return key for return of one layer.

The top menu is as shown in the screen below.

[Display Screen]

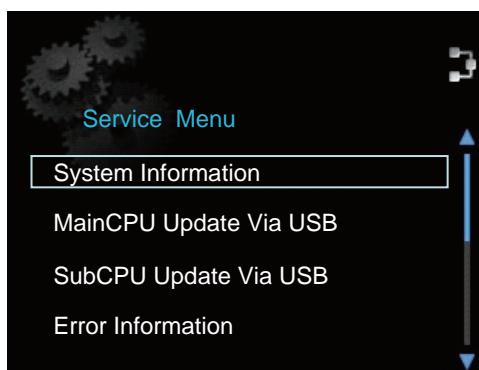

In addition, menu operation by the Main Unit button is also capable if attached remote controller is not available.

In that case, perform the following actions;

- ►► : ↓
- ▲▲ : ↑
- ▶/■ : Enter
- ■ : Return



In some menu, it is unable to return to one hierarchy layer before with the [■] button. In that case, please exit from the Service Mode once with function button, etc.

F

4-1. System Information

When the System Information is selected, the screen below is displayed.

[Display screen]

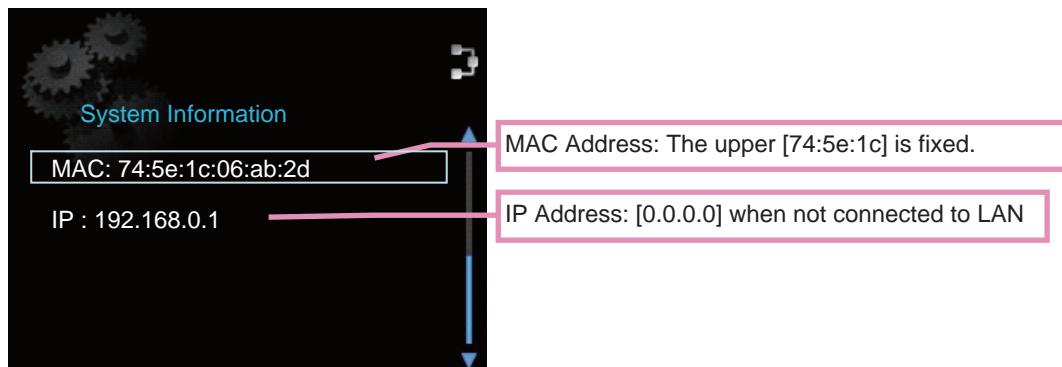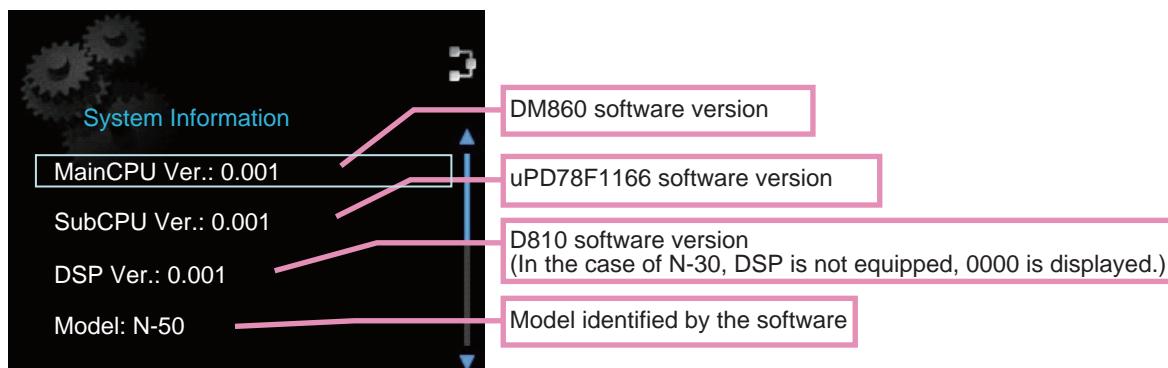

4-2. MainCPU Update Via USB


See the "8.1 FIRMWARE UPDATE".

4-3. SubCPU Update Via USB

See the "8.1 FIRMWARE UPDATE".


4-4. Error display for protection circuit, etc.

When "Error Information" is selected on the ServiceMenu, the screen below is displayed.

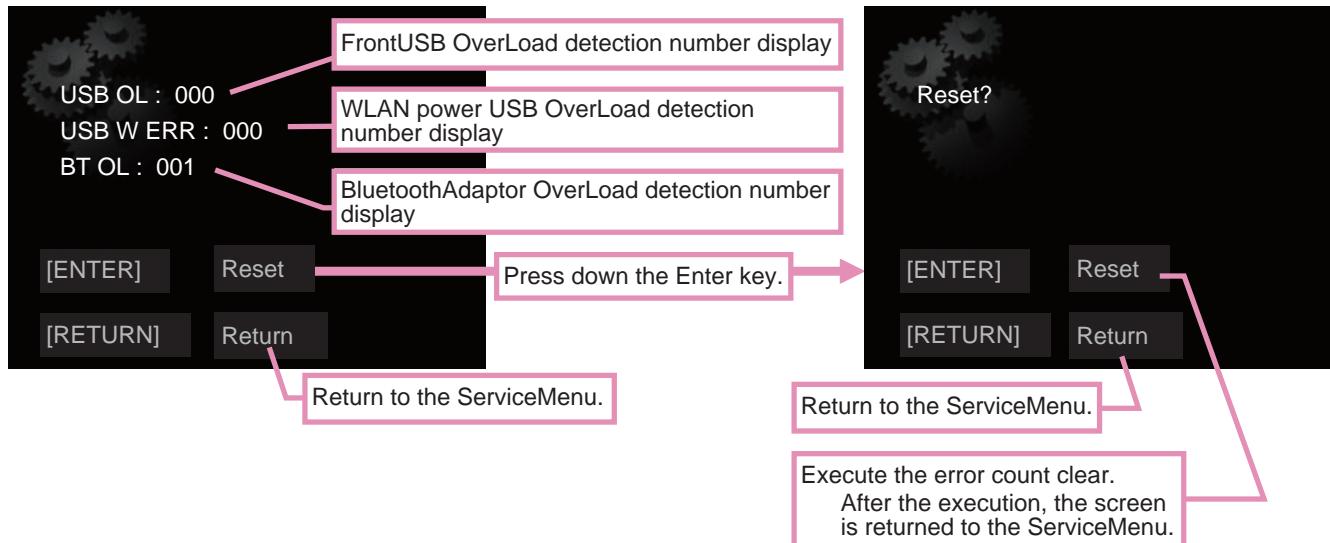

5. Factory Setting

When the "Factory Reset" is selected on the ServiceMenu, the screen below is displayed.

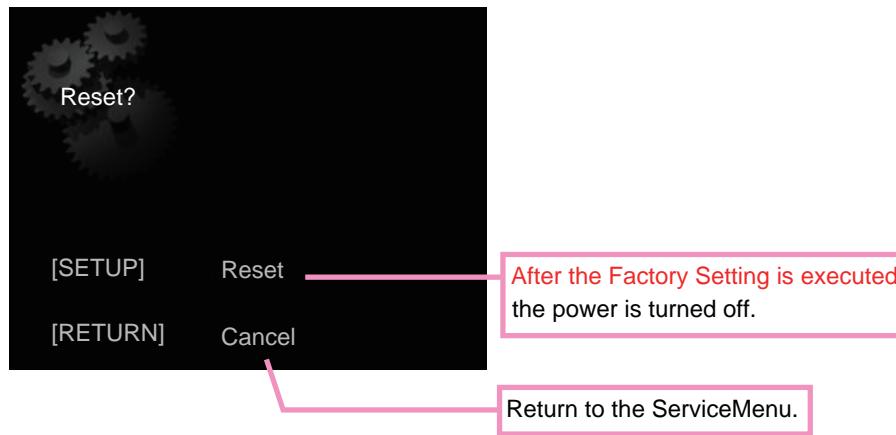

6.2 INITIAL SETTING

	Setting name	Initial value	Setting range
SETUP system	Intensity setting	LEVEL3	LEVEL3 / LEVEL2 / LEVEL1
	Display OFF setting	Continuous display	Display OFF/Continuous display
	Automatic Power Off	ON	ON/OFF
	High-Speed startup mode	OFF	ON/OFF
	Language setting	English	English, French, German, Dutch, Italian, Spanish, Russian, Japanese
SOUND system	AutoSoundRetriever	OFF	ON/OFF
	AutoLevelControl	OFF	ON/OFF
	SoundRetrieverAir	OFF	ON/OFF
	Hi-bit32	OFF	ON/OFF
	PureAudio	OFF	ON/OFF
SYSTEM	FUNCTION	iPod	All functions
NETWORK	DHCP	ON	ON/OFF
	IP Address	0.0.0.0	0.0.0.0 ~ ff.ff.ff.ff
	SubNetmask	0.0.0.0	0.0.0.0 ~ ff.ff.ff.ff
	Gateway	0.0.0.0	0.0.0.0 ~ ff.ff.ff.ff
	DNS 1	0.0.0.0	0.0.0.0 ~ ff.ff.ff.ff
	DNS 2	0.0.0.0	0.0.0.0 ~ ff.ff.ff.ff
	Proxy setting	Don't Use	Don't Use/Use
	Proxy server	(Null)	128 characters
	Proxy port	(Null)	0 ~ ffff
	Favorite	0 station	20 station
	Parental lock setting	OFF	ON/OFF
	Parental lock password	0000	0000 ~ 9999
BT	Friendly Name	*1	
	PIN CODE	0000	0000 / 1234 / 8888

When the power cord is plugged off or the power is turned off by the STANDBY/ON switch of the Main Unit, the saving of the above setting values is not ensured.

The display OFF setting becomes valid till the power is turned off.

The function that was finally selected is saved at the time of transition to STANDBY. It cannot be saved by the STANDBY/ON switch of the Main Unit.

*1: The Model Name shall be the initial value.

"N-50" for the upper model, and "N-30" for the lower model.




*2: When the power is turned off by the STANDBY/ON switch of the Main Unit during the saving of settings in progress, the saving of the setting values is not ensured.

7. DISASSEMBLY

- Note 1 :** Even if the unit shown in the photos and illustrations in this manual may differ from your product, the procedures described here are common.
- Note 2 :** As for the assembling, please perform assembling following to the opposite procedures of How to Disassemble.
If any notes are existed, please follow those instructions.

[1] Cabinet

- (1) Remove the four screws.
 (N-50/CUXE, N-50-K/SYXE8)
 (N-30/CUXE, N-30-K/SYXE8:)
 1500040083B10-IL
- B (N-50-S/SYXE8, N-30-S/SYXE8:)
 1500040084B10-IL
- (2) Remove the five screws.
 (BBZ30P060FTB)

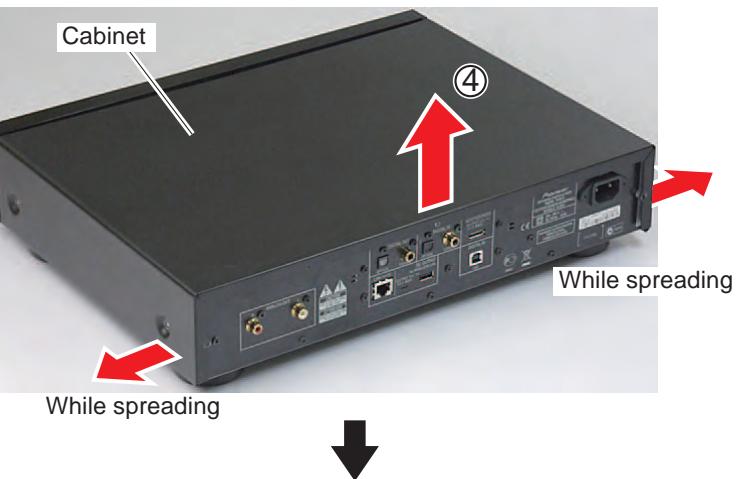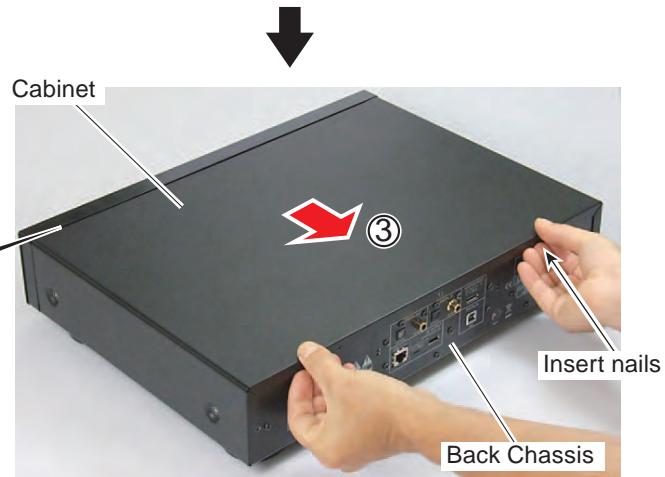


While spreading

While spreading


[2] Front Section

- (1) Remove the five screws.
 (N-50/CUXE, N-50-K/SYXE8
 (N-30/CUXE, N-30-K/SYXE8:
 BBZ30P080FTB
 (N-50-S/SYXE8, N-30-S/SYXE8:
 BBZ30P080FNI)

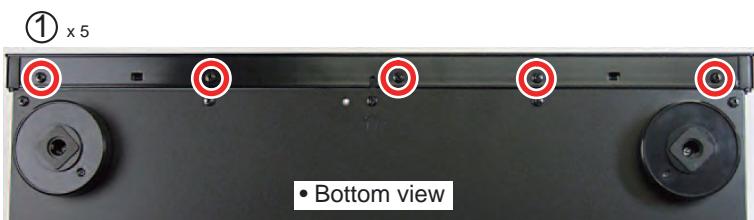

- (2) Remove the two screws. (BBZ30P080FTC)
- (3) Remove the screw. (B020230063B10-IL)
- (4) Cut the Binder. (N-50, N-50-K/-S)
- (5) Release the cables from the PCB Binder. (N-50, N-50-K/-S)

- (6) Release the cables from the Binder. (N-50, N-50-K/-S)

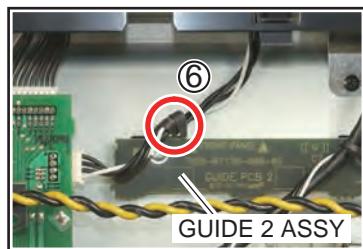

- (7) Release the cables from the PCB Binder.





- (8) Remove the screw. (BBZ30P080FTC)

- (9) Loosen the screw. (BBZ30P080FTC)

- (10) Cut the two Binders.


- (11) Insert a Screwdriver through the holes at left side of the Main Chassis and remove the three screws. (BBZ30P060FTC)

- (12) Unhook the two hooks and remove the Front Section.

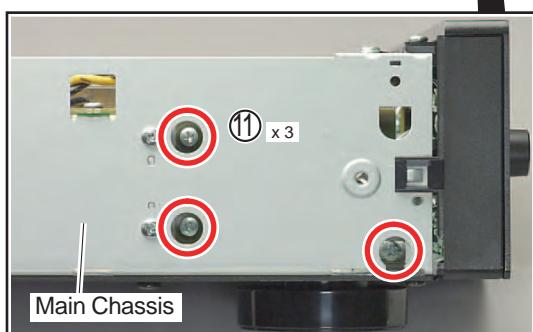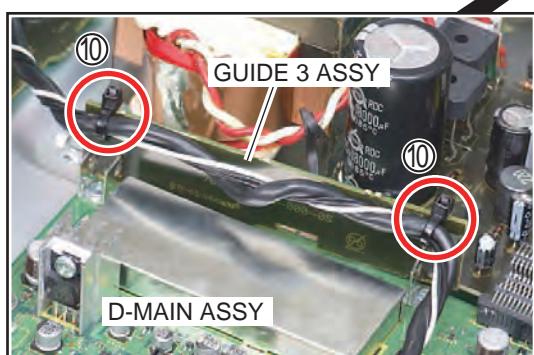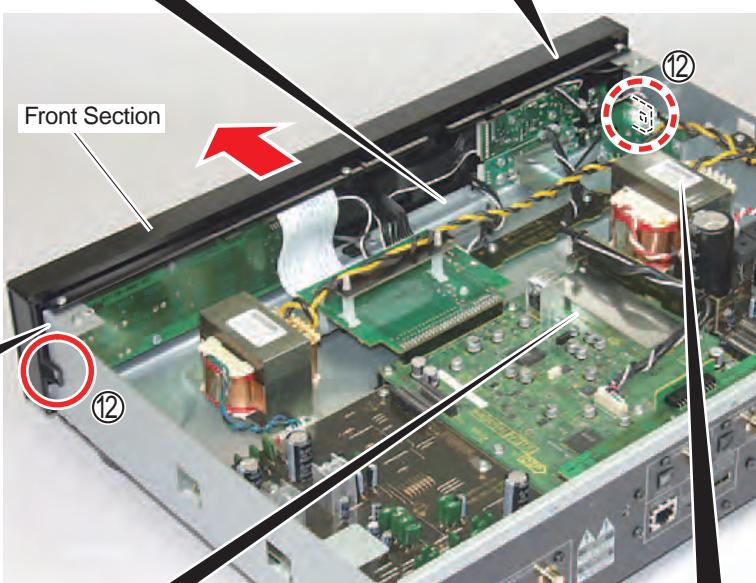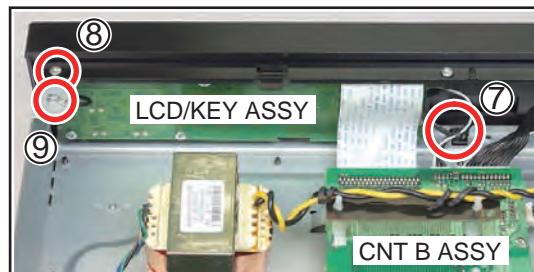

[3] Diagnosis

- A (1) Attach a Ground Cable from the IR ASSY with the screw. (B020230063B10-IL)
 (2) Attach a Ground Cable from the LED ASSY with the screw. (BBZ30P080FTC)
 Please use the screw hole near front to detach the Front Part.


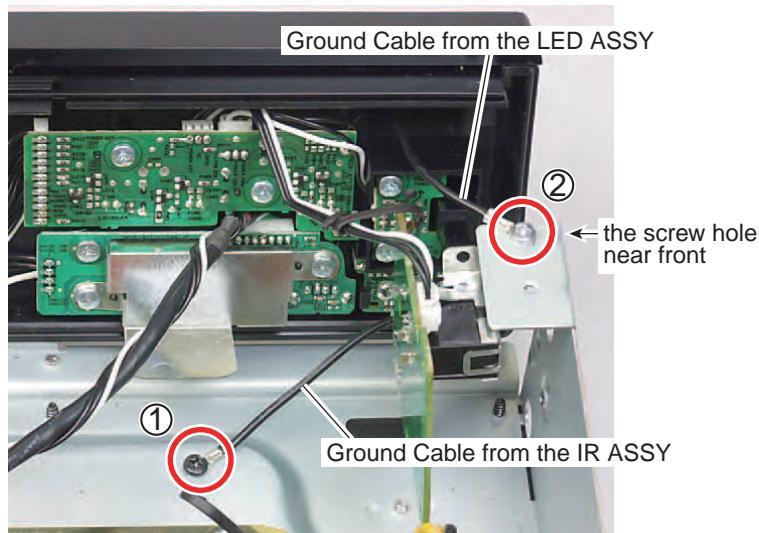


- B (3) Arrange the units as shown in the photo.



- D (4) Connect the Shield on USB ASSY to the Main Chassis Ground.

Note: Make the USB ASSY, IR ASSY not to touch with the Main Chassis for avoiding short circuited.

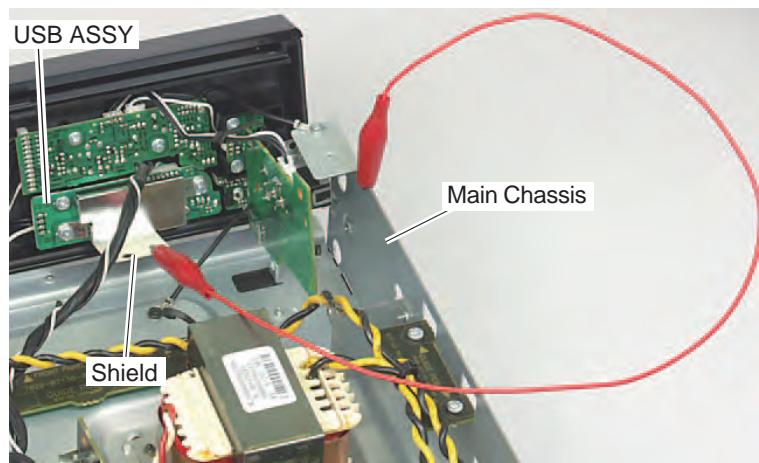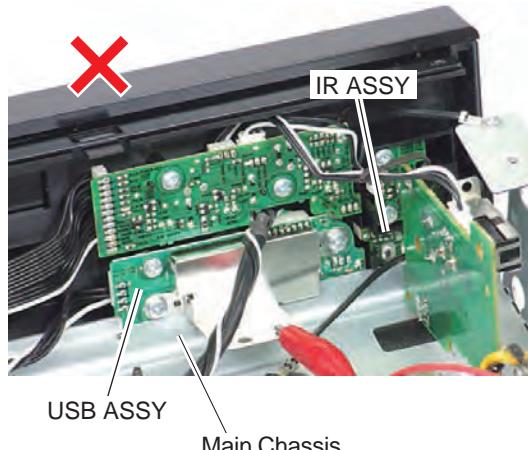


Notes on assembling

[1] Styling of cables


- (1) FFC between the LCD/KEY ASSY and CNT B ASSY

Make FFC not to touch with the LCD/KEY ASSY by folding the base of auxiliary plate located at the CNT B ASSY at a right angle.

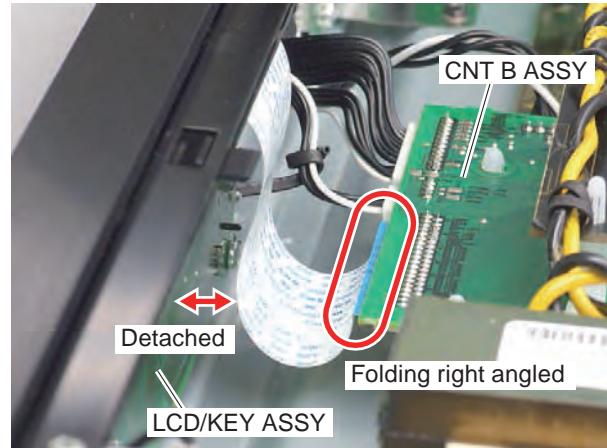

- (2) Secondary Side Cable of the Power Trans
(N-50/CUXE: 8200570300120-IL)
(N-50-K/SYXE8, N-50-S/SYXE8:
8200570300130-IL)


Put down the Cable not to touch with the Cabinet.

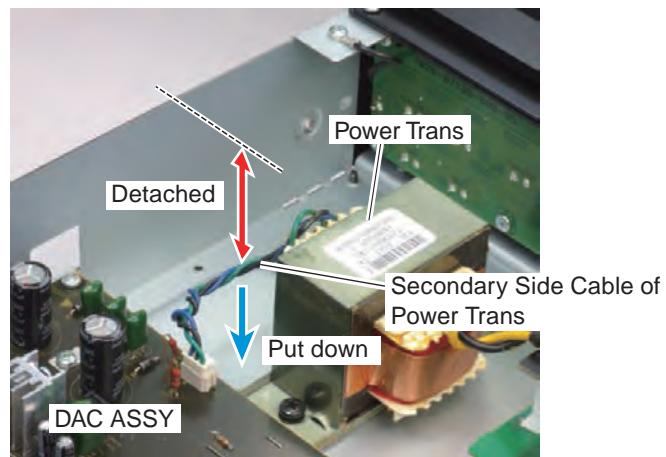



- (3) Primary Side Cable of the Power Trans
(N-50/CUXE: 8200570300120-IL)
(N-50-K/SYXE8, N-50-S/SYXE8:
8200570300130-IL)

Make some Cable extra length by pulling the Cable lightly toward the Power Trans side not to touch with the Cabinet after fixing the Cable with the PCB Binder of POWER SW ASSY.

Securely fix the Cable with insulated the PCB Binder of GUIDE 4 ASSY not to touch with the Cabinet.

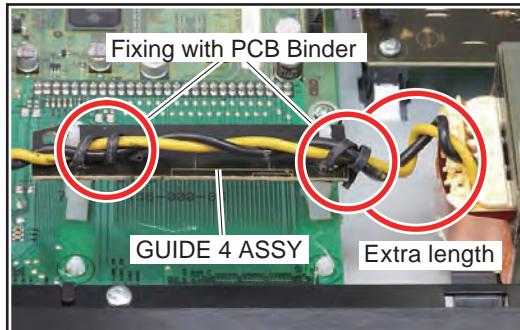


[Case of N-30, N-30-K/-S] →

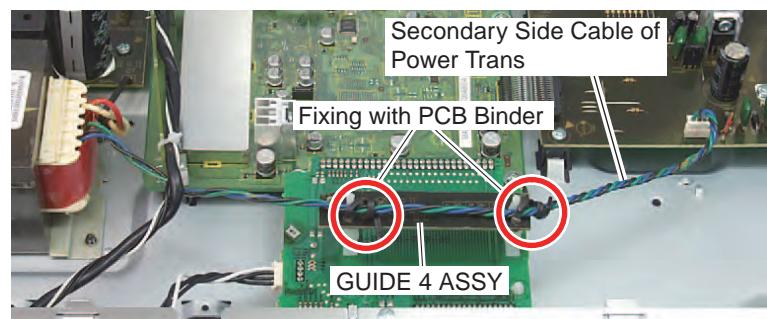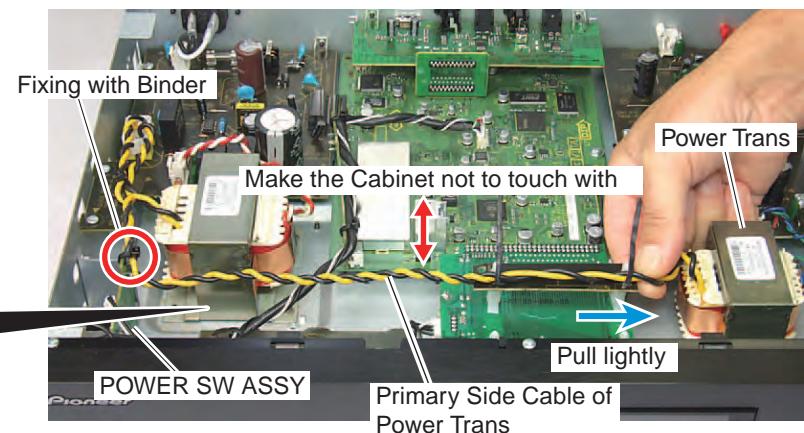

- A (4) Secondary Side Cable of the Power Trans
 (N-50/CUXE: 8200660300120-IL)
 (N-50-K/SYXE8, N-50-S/SYXE8:)
 (8200660300130-IL)
 (N-30/CUXE: 8200660300150-IL)
 (N-30-K/SYXE8, N-30-S/SYXE8:)
 (8200660300160-IL)


Fix the Secondary Side Cable of Power Trans with the PCB Binder of STBY ASSY not to touch with the Cable from USB ASSY.

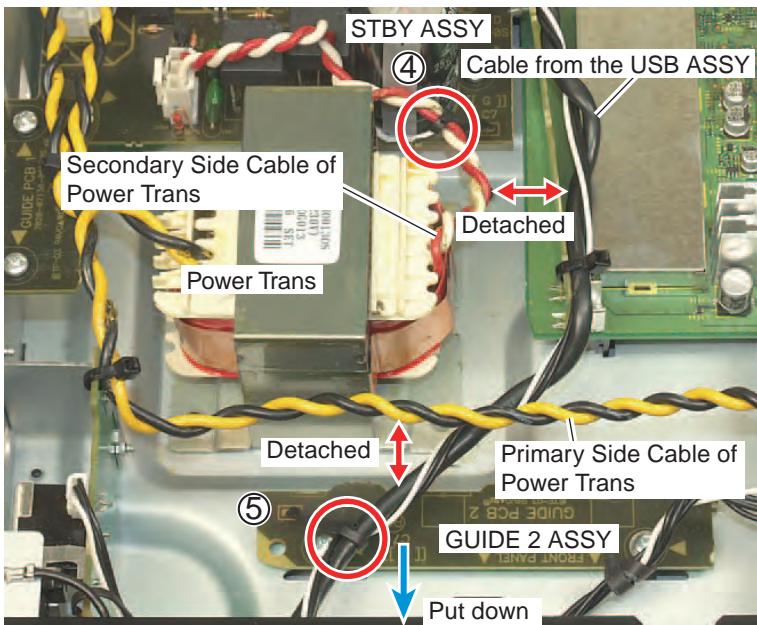

Front

- B (5) Cable from the USB ASSY


Fix the Cable from the USB ASSY with the PCB Binder of GUIDE 2 ASSY not to touch with the Primary Side Cable of Power Trans.
 (N-50/CUXE: 8200570300120-IL)
 (N-50-K/SYXE8, N-50-S/SYXE8:)
 (8200570300130-IL)

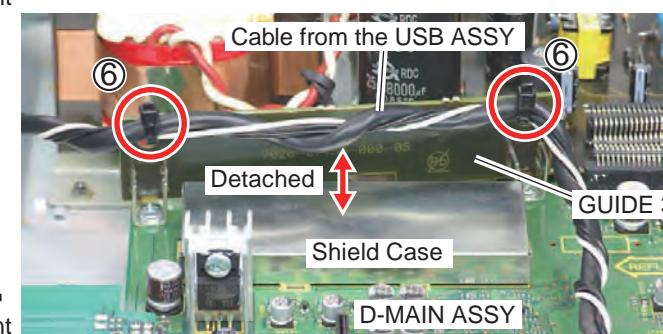

Front

- C (6) Cable from the USB ASSY

Fix the Cable to the GUIDE 3 ASSY without sag with the two Binders not to touch the Shield Case of D-MAIN ASSY.

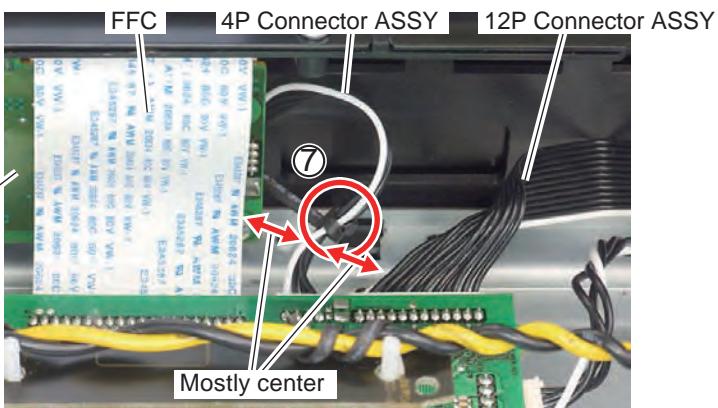


Front

- D (7) 4P Connector ASSY from the LCD/KEY ASSY

Fix the Cable at center with the PCB Binder of LCD/KEY ASSY not to touch with the 12P Connector ASSY from FFC and LED ASSY.

LCD/KEY ASSY

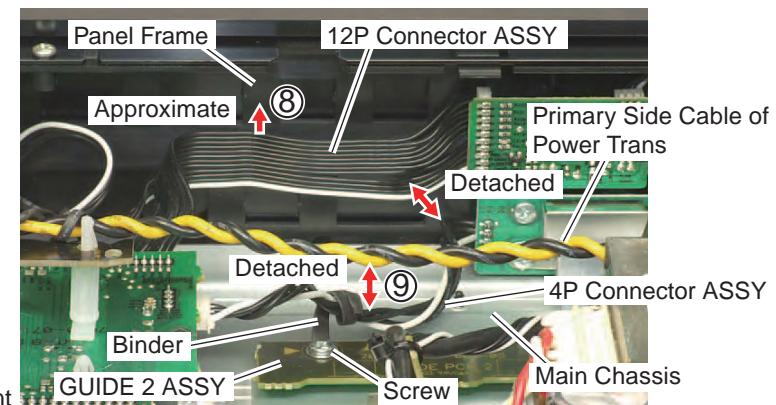

Front

- E (8) 12P connector ASSY

Perform the styling of the Cable along the line with the Panel Frame (approximate the Cable to the Panel Frame as possible).

- F (9) 4P Connector ASSY from the USB ASSY

Put down the Cable apart from the Primary Side Cable of Power Trans and fix it with the Binder.

However, the Cable from the USB ASSY should not to touch with the screw of Binder as well as the Main Chassis.


(10) 3P Connector ASSY from the LED ASSY

Fix with the PCB Binder of POWER SW ASSY by lowering the 3P Connector ASSY not to touch with the Cabinet.

(11) Primary Side Cable of the Power Trans

- | | |
|---|--|
| (N-50/CUXE : 8200660300120-IL
: 8200570300120-IL) | (N-50-K/SYXE8, N-50-S/SYXE8 : 8200660300130-IL
: 8200570300130-IL) |
| (N-30/CUXE : 8200660300150-IL) | (N-30-K/SYXE8, N-30-S/SYXE8 : 8200660300160-IL) |

Fix the Cable on GUIDE 1 ASSY with the Binder not to touch with the Main Chassis Side Piece and the Screw Heads.

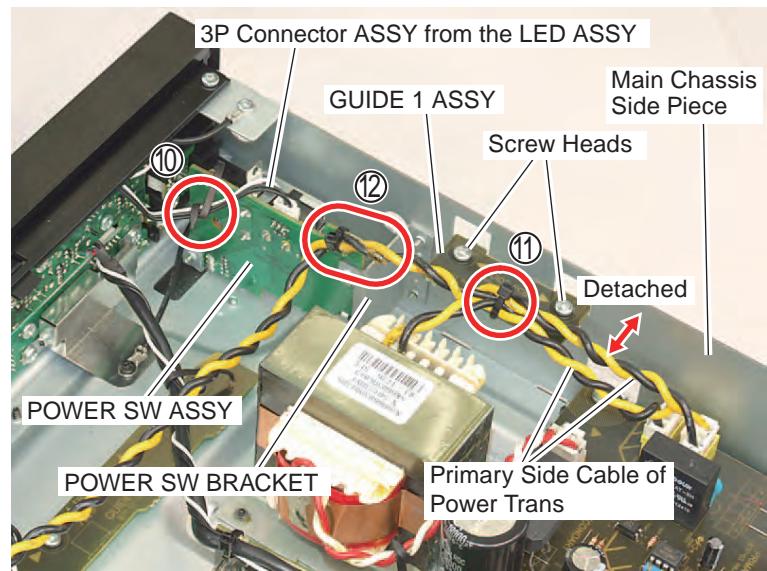

(12) Primary Side Cable of the Power Trans


- | | |
|---------------------------------|--|
| (N-50/CUXE : 8200570300120-IL) | (N-50-K/SYXE8, N-50-S/SYXE8 : 8200570300130-IL) |
|---------------------------------|--|

Fix the Cable on POWER SW ASSY with the Binder not to touch with the edge of POWER SW BRACKET.


[2] Direction of Insulator

Align the mark at under surface of Insulator with the direction of photo.


- | |
|--|
| (N-50/CUXE, N-50-K/SYXE8
N-30/CUXE, N-30-K/SYXE8:
4000210391000-IL) |
|--|

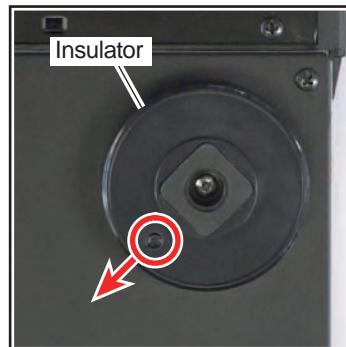


- | |
|---|
| (N-50-S/SYXE8, N-30-S/SYXE8:
4007210391000-IL) |
|---|

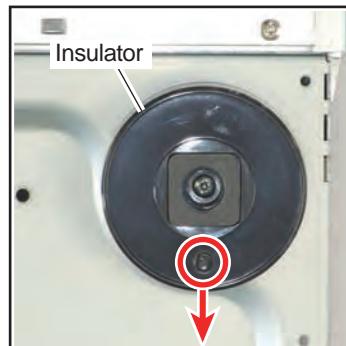

[Case of N-50, N-50-K/-S]

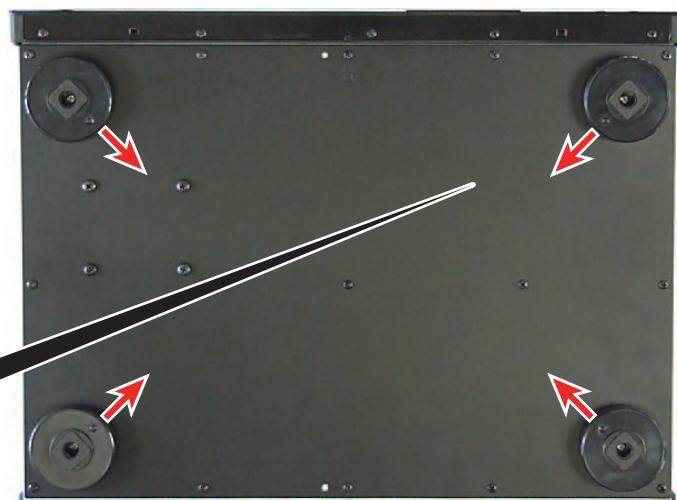

[Case of N-30, N-30-K/-S]

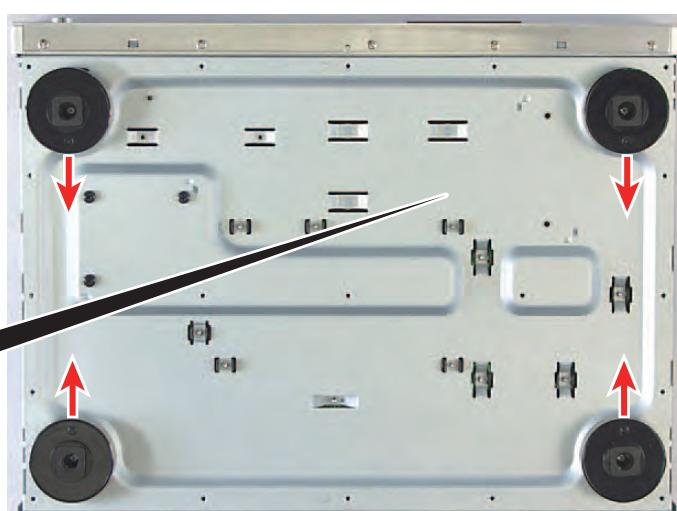





8. EACH SETTING AND ADJUSTMENT

8.1 FIRMWARE UPDATE



- A 1. Save the update files for MAIN CPU (NAP12Main_***.bcd) and for SUB CPU (NAP12Sub_***.bcd) in the root folder of the USB Memory.
- * Do not put two or more update files in the root folder.
 - Only one update file that is first found is recognized.
2. Plug the power cord into the receptacle and turn on the power.
3. Connect the USB Memory in which the update file has been stored to the Main Unit.
4. Press “ESC” ⇔ “+10” from service remote controller GGF1381 and enter into the Service Mode.
5. Select “MainCPU Update via USB” or “SubCPU Update via USB” on the Menu Screen.
6. Press on the “ENTER” key on the Update Screen, and the update starts.
7. To update the Main CPU, DM860 automatically restarts and the software writing processing automatically starts up.
When the update is successfully completed, the progress bar turns green and the restart automatically operates.
- B 8. To update the Sub u-com, the Update of uPD78F1166 starts and the LED for the Main Unit flashes during the update processing.
When the update is completed, the LED flashing stops, the LCD blacks out and the Main Unit goes into standby.
9. By “System Information” of “6.1 SERVICE MODE” menu, confirm that Main Ver and Sub Ver have been updated.
- Note: Do not plug off the power cord during the update processing.

■MAIN CPU Update Screen

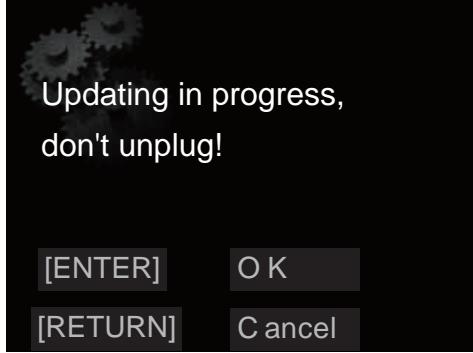C	Explanation	Key operation	FL display	Time
C	When “Update” is selected from the menu, this screen appears.			
D	On this screen, press the [ENTER], and the update starts. [RETURN]: Returns to an immediately preceding screen.	[ENTER] [RETURN]		
E	For the error display after the [ENTER] key is pressed, see *1 in the detailed description.			
F	DM860 automatically restarts.	Key invalid		About 20 seconds

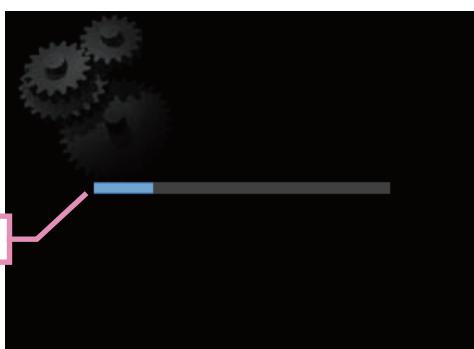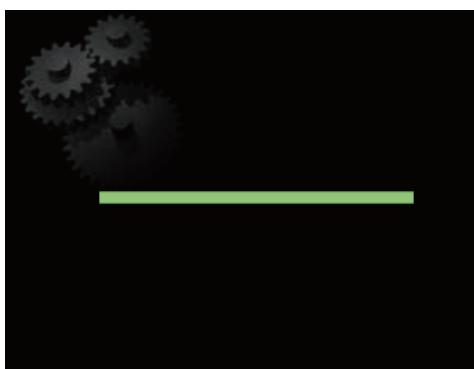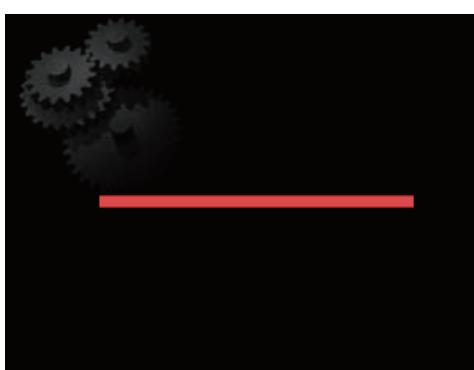Explanation	Key operation	FL display	Time
When the restart of DM860 is completed, the background is displayed for about 20 seconds.	Key invalid		About 20 seconds
After the restart, the software writing processing automatically starts up. The status of writing is displayed by the progress bar.	Key invalid	 In increments of 20%	
When the update is successfully completed, the progress bar turns green and the restart automatically operates.	Key invalid		
When the download fails, the progress bar turns red. In the case of failure, this state is continued. Plug off and on the power cord to return to a normal state. The previous version starts up. In the case of a failure in data, the progress bar turns red.			

■ State of the Sub CPU Update Screen

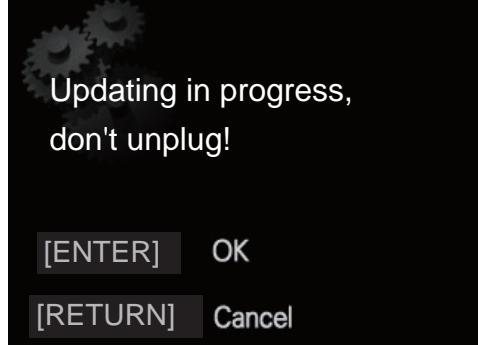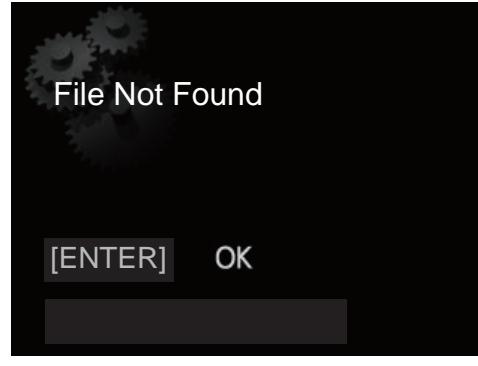	Explanation	Key operation	FL display	Time
A	<p>On this screen, press the [ENTER], and the update starts.</p> <p>[RETURN]: Returns to an immediately preceding screen.</p> <p>B For the error display after the [ENTER] key is pressed, see *1 in the detailed description.</p>	[ENTER] [RETURN]		
C	<p>Update of uPD78F1166 starts and "Updating in progress" is displayed.</p> <p>The blue LED flashes during the updating processing.</p>	Key invalid		About 5 minutes
D	When the update is completed, the LCD blacks out and the Main Unit goes into a standby state.			
E	<p>If no update file exists in USB, the warning is displayed.</p> <p>Press [Enter] to return to the menu and re-do.</p> <p>* If the USB Memory is not inserted, the warning is displayed.</p>			
F				

8.2 HOW TO CHECK EACH TERMINAL

1. Check of LAN terminal

Directly connect PC and this device and conduct the setting below. Then, access to the set by Web Browser of PC. If the display as shown below appears, the LAN Terminal is in the normal state.

Setting for this device:

1. Turn the power ON.
2. Press "SETUP" and select Network Setting ➔ Connection Setting ➔ DHCP OFF.
3. Set as follows

IP Address	:	192.168.0.1
Subnet Mask	:	255.255.255.0
Gateway Address	:	0.0.0.0
NDS (1st)	:	0.0.0.0
NDS (2nd)	:	0.0.0.0
Proxy Setting	:	Not used

4. After the setting, press "RETURN" to leave the menu.

A

B

C


D

E


F

Setting for PC:

1. Press the "Start" button, "Setting" ➔ open "Control Panel".
2. Open "Network Connection", double click "Local Area Connection", and open the Local Area Connection status.
3. Press the "Property" button and open the Local Area Connection property.
4. Double click the Internet Protocol.

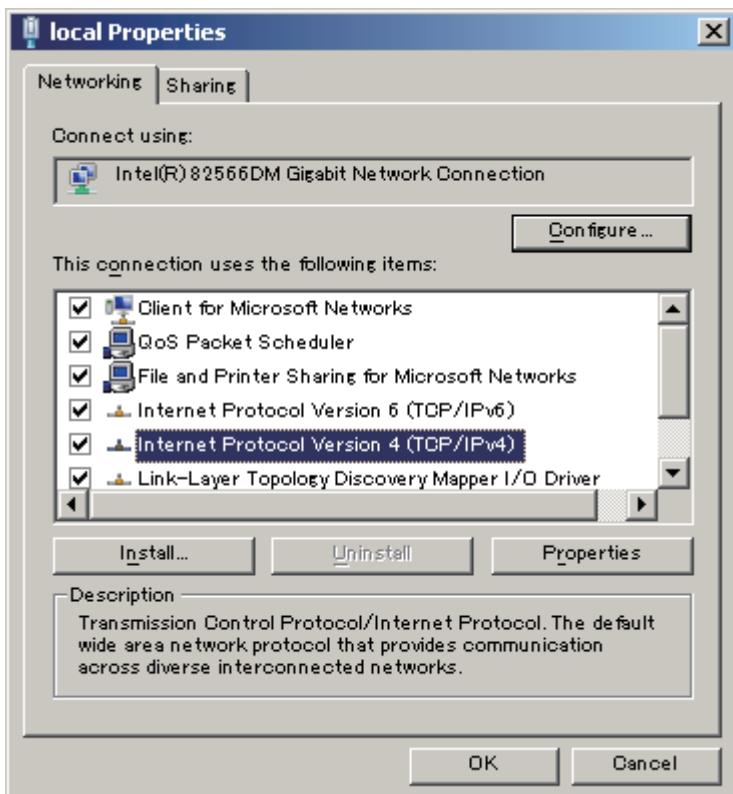


5. Set as shown below.

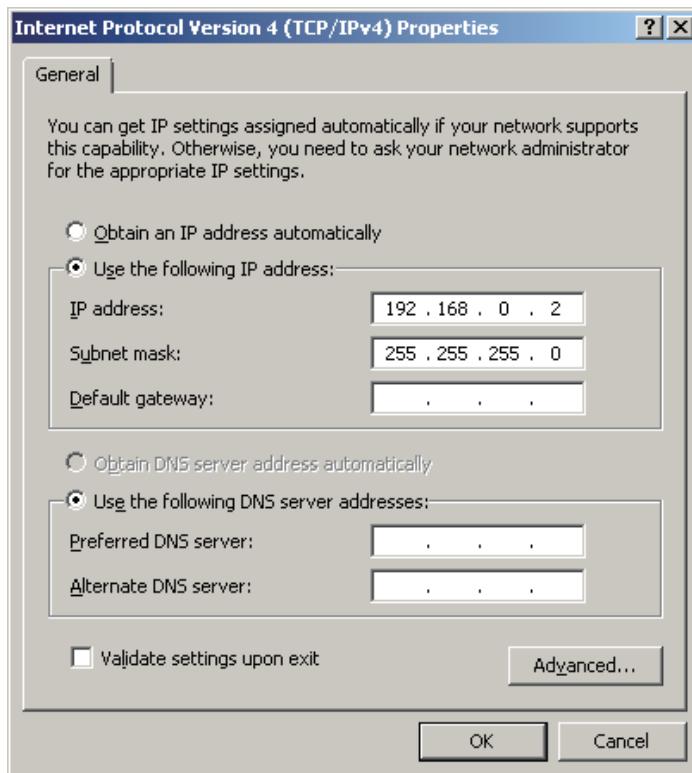

B
C
D
E
F

Start the Web Browser and enter <http://192.168.0.1> for URL. When the screen as shown below appears, the terminal is in the normal state.

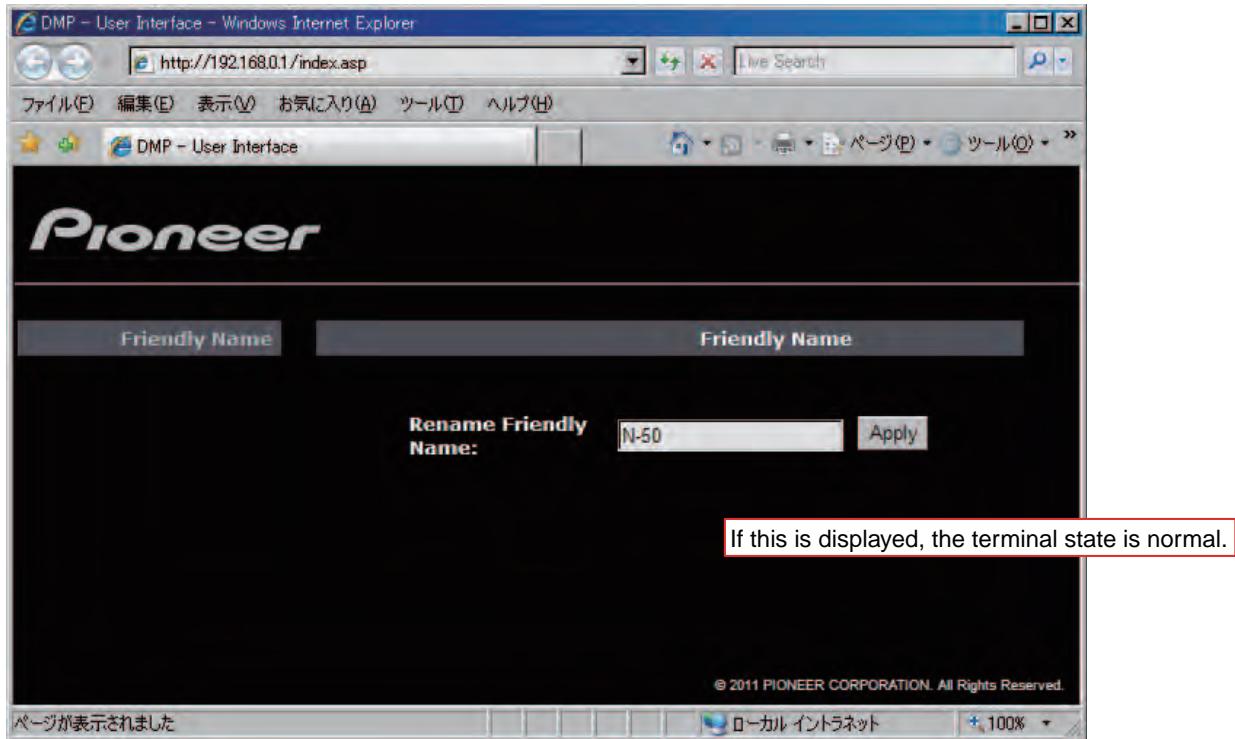

2. USB-B (Rear)

Turn ON the Main Unit and connect to PC with a USB-B cable.

Install the driver downloaded on Pioneer's home page. When Pioneer USB Audio Device is displayed for the item of "Sound, Video and Game Controller" of the Device Manager of PC, the terminal state is normal.

■ 5

■ 6

■ 7

■ 8

A

B

C

D

E

F

N-50

39

■ 5

■ 6

■ 7

■ 8


■

9. EXPLODED VIEWS AND PARTS LIST

- NOTES:**
- Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
 - The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screws adjacent to ▼ mark on product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING SECTION

A

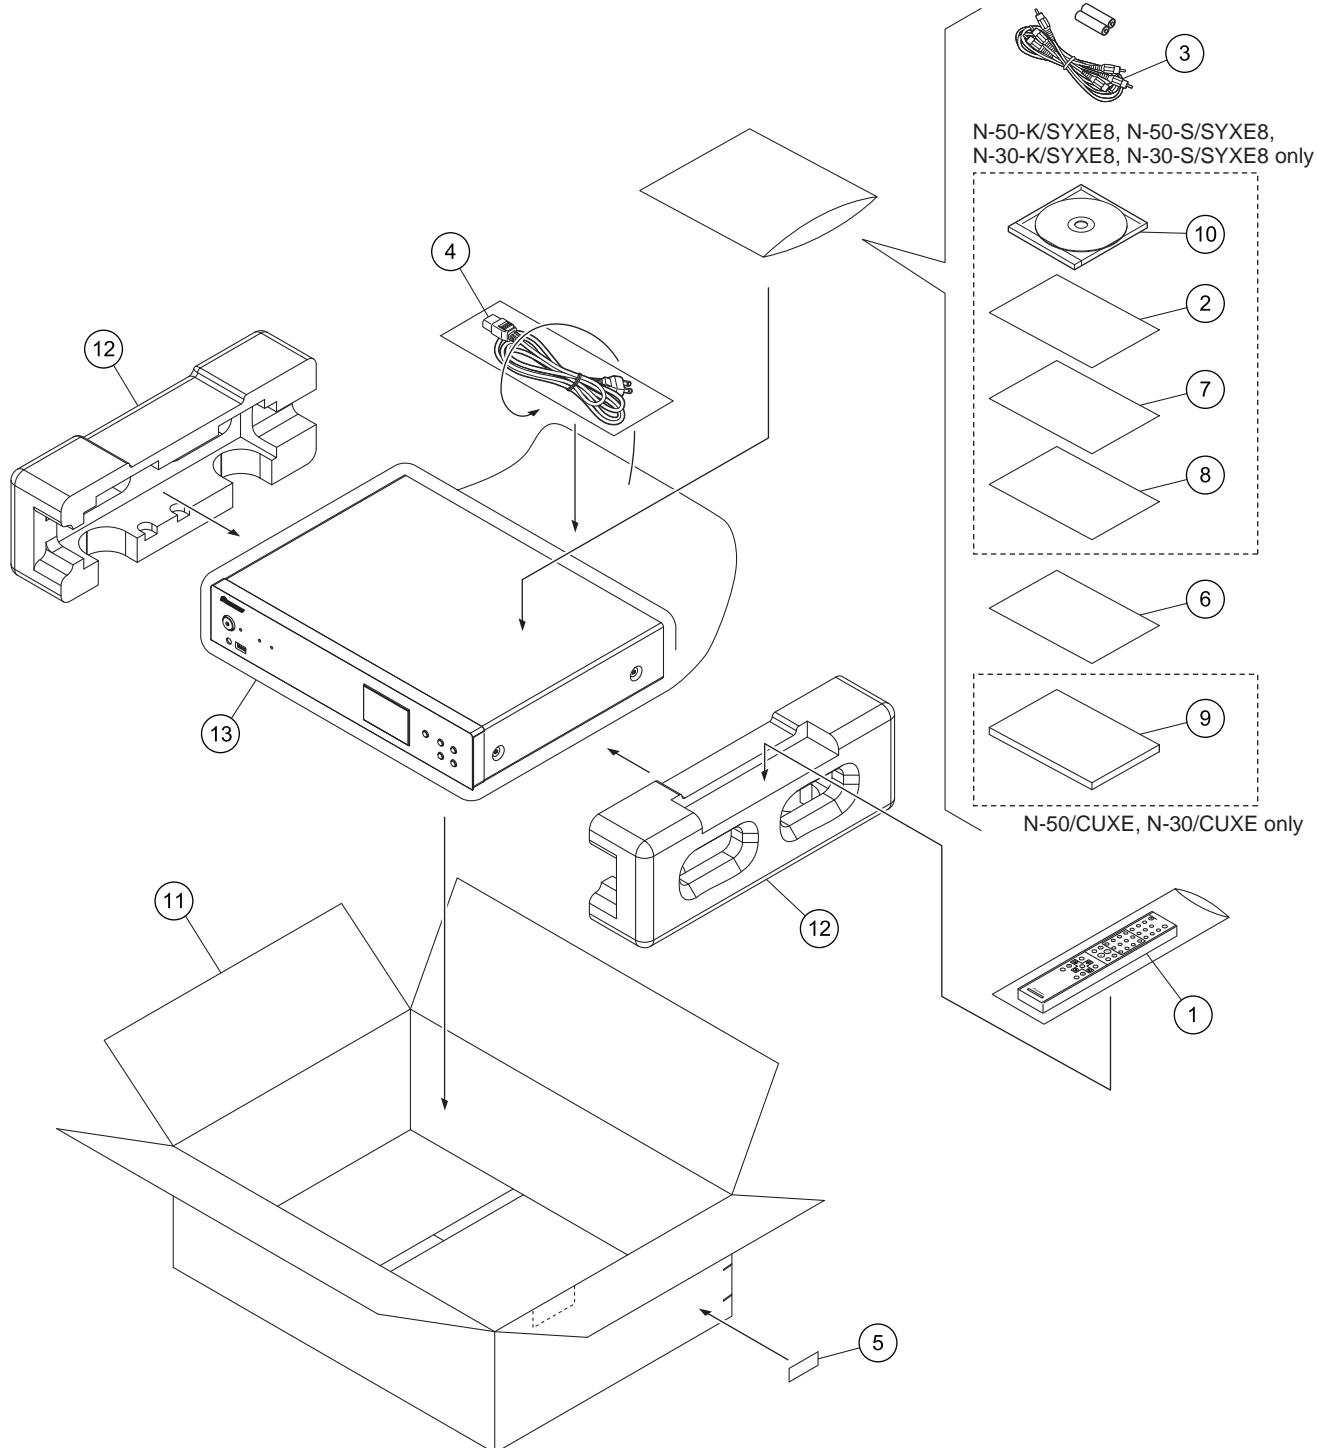

F

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
	1 Remote Control Unit (AXD7641)	8300764100010-IL
NSP	2 Warranty Card	See Contrast table (2)
	3 Audio Cable	L063102020050-IL
⚠	4 AC Power Cord	See Contrast table (2)
NSP	5 Serial Label	RRW-168
	6 Caution Sheet	See Contrast table (2)
	7 Safety Sheet	See Contrast table (2)
	8 Quick Guide	See Contrast table (2)
	9 Operating Instructions (En, Fr)	See Contrast table (2)
	10 Operating Instructions (CD-ROM) (En,Fr,De,It,Es,NI,Ru)	See Contrast table (2)
11	Packing Case	See Contrast table (2)
12	Pad L/R	6230213084000-IL
13	PE, Sheet	6327040059000-IL

(2) CONTRAST TABLE

N-50/CUXE, N-50-K/-SYXE8, N-50-S/-SYXE8, N-30/CUXE, N-30-K/-SYXE8 and N-30-S/-SYXE8 are constructed the same except for the following:

<u>Mark</u>	<u>No.</u>	<u>Symbol and Description</u>	<u>N-50/CUXE</u>	<u>N-50-K/-SYXE8</u>	<u>N-50-S/-SYXE8</u>	<u>N-30/CUXE</u>	<u>N-30-K/-SYXE8</u>	<u>N-30-S/-SYXE8</u>
NSP	2	Warranty Card (*1)	Not used	ARY7128	ARY7128	Not used	ARY7128	ARY7128
⚠	4	AC Power Cord	L068125130010-IL	L068250160020-IL	L068250160020-IL	L068125130010-IL	L068250160020-IL	L068250160020-IL
	6	Caution Sheet	5227000002270-IL	5227000002280-IL	5227000002280-IL	5227000002270-IL	5227000002280-IL	5227000002280-IL
	7	Safety Sheet	Not used	5227000002330-IL	5227000002330-IL	Not used	5227000002330-IL	5227000002330-IL
	8	Quick Guide	Not used	5707000006140-IL	5707000006140-IL	Not used	5707000006140-IL	5707000006140-IL
	9	Operating Instructions (En, Fr)	5707000006130-IL	Not used	Not used	5707000006130-IL	Not used	Not used
	10	Operating Instructions (CD-ROM) (En,Fr,De,It,Es,NI,Ru)	Not used	6517000000450-IL	6517000000450-IL	Not used	6517000000450-IL	6517000000450-IL
	11	Packing Case	6007212010060-IL	6007212010050-IL	6007212010080-IL	6007212010010-IL	6007212010020-IL	6007212010070-IL

(*1) : The Warranty card of CUXE models are included in the operating instructions.

A

B


C

D

E

F

9.2 EXTERIOR SECTION

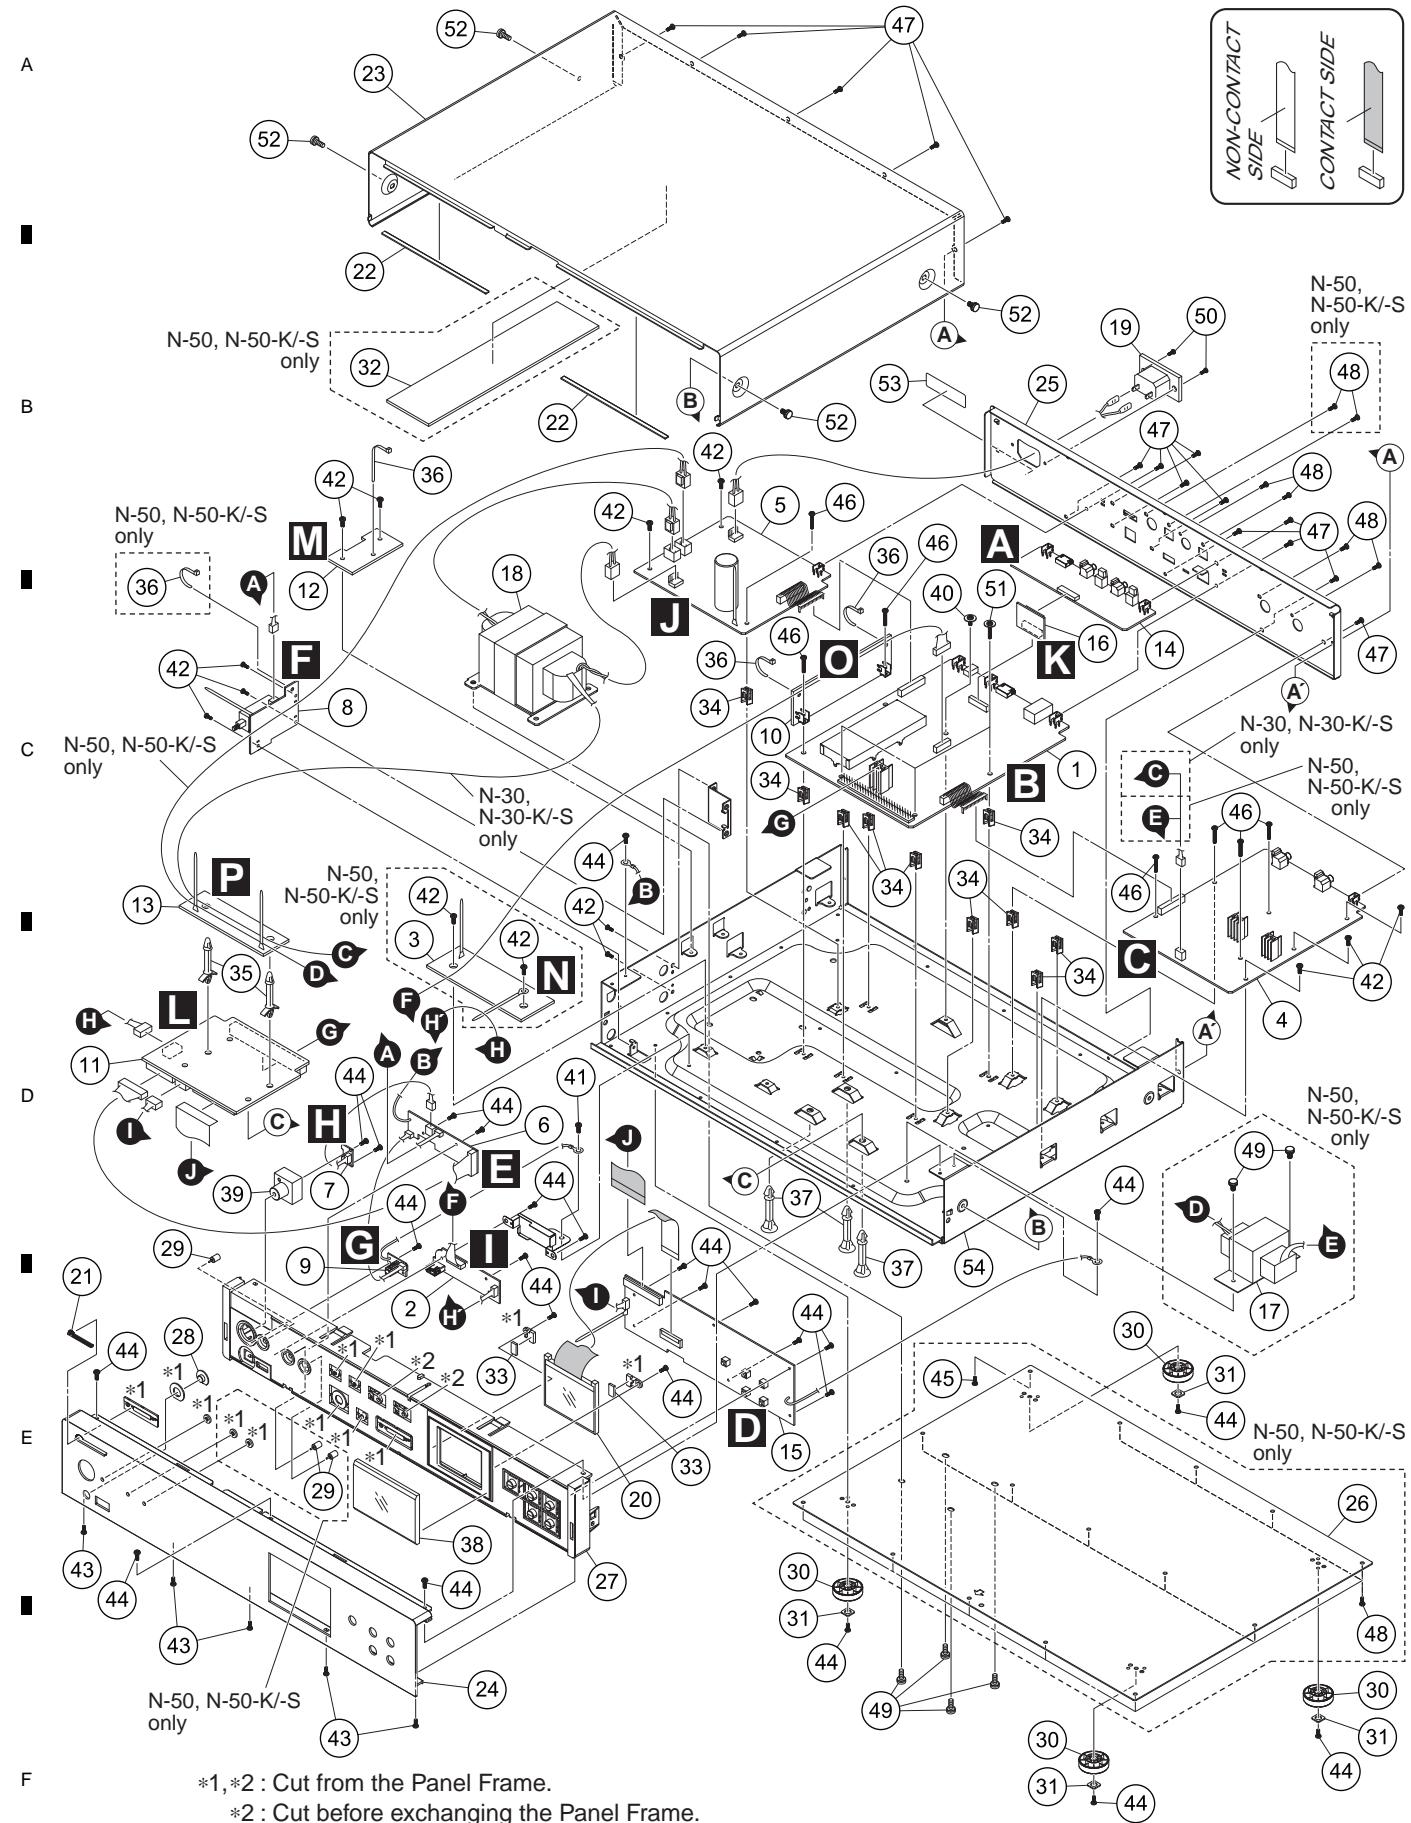

(1) EXTERIOR SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	D-MAIN ASSY	See Contrast table (2)	26	Bottom Chassis	See Contrast table (2)
2	USB ASSY	7028071371010-IL	27	Panel Frame	See Contrast table (2)
3	GUIDE 2 ASSY	See Contrast table (2)	28	Lens (Remocon)	See Contrast table (2)
4	DAC ASSY	See Contrast table (2)	29	Lens (Standby)	3710210693000-IL
5	STBY ASSY	See Contrast table (2)	30	Insulator (PLS)	See Contrast table (2)
6	LED ASSY	See Contrast table (2)	31	Cushion (Foot)	4050211605000-IL
7	POWER LED ASSY	7028071384010-IL	32	Cushion (SR Sheet)	See Contrast table (2)
8	POWER SW ASSY	7028071385010-IL	33	Cushion (LCD)	4050213805000-IL
9	IR ASSY	7028071386010-IL	34	Supporter	4070001601010-IL
10	GUIDE 3 ASSY	7028071387010-IL	35	Support PCB	4070211583000-IL
11	CNT B ASSY	7028071388010-IL	36	Binder	4330040343010-IL
12	GUIDE 1 ASSY	7028071389010-IL	37	Fastener	4420040243010-IL
13	GUIDE 4 ASSY	702807138B010-IL	38	Window	5077213233000-IL
14	JACK ASSY	See Contrast table (2)	39	Knob ASSY	See Contrast table (2)
15	LCD/KEY ASSY	7028071392010-IL	40	Screw	ABZ30P080FTC
16	CNT A ASSY	7028071393010-IL	41	Screw	B020230063B10-IL
⚠ 17	Power Trans	See Contrast table (2)	42	Screw	BBZ30P060FTC
⚠ 18	Power Trans	See Contrast table (2)	43	Screw	See Contrast table (2)
19	Socket, Power AC	G430040560021-IL	44	Screw	BBZ30P080FTC
20	Display, LCD	K550240600010-IL	45	Screw, Tap Tite	See Contrast table (2)
21	PIONEER Badge (AL)	See Contrast table (2)	46	Screw	B020030171B10-IL
22	Sheet (Himelon)	1210211749000-IL	47	Screw, Tap Tite	BBZ30P060FTB
23	Cabinet	See Contrast table (2)	48	Screw, Tap Tite	B020230083B10-IL
24	Front Panel	See Contrast table (2)	49	Screw	B028940101B11-IL
25	Back Chassis	See Contrast table (2)	50	Screw	CBZ30P080FTB
NSP	51	Screw		1500001206020-IL	
NSP	52	Screw		See Contrast table (2)	
NSP	53	Serial Label		RRW-168	
NSP	54	Main Chassis		3200214066000-IL	

(2) CONTRAST TABLE



N-50/CUXE, N-50-K/-SYXE8, N-50-S/-SYXE8, N-30/CUXE, N-30-K/-SYXE8 and N-30-S/-SYXE8 are constructed the same except for the following:

Mark No.	Symbol and Description	N-50/CUXE	N-50-K/-SYXE8	N-50-S/-SYXE8	N-30/CUXE	N-30-K/-SYXE8	N-30-S/-SYXE8
1	D-MAIN ASSY	7028071361010-IL	7028071361010-IL	7028071361010-IL	7028071361020-IL	7028071361020-IL	7028071361020-IL
3	GUIDE 2 ASSY	702807138A010-IL	702807138A010-IL	702807138A010-IL	Not used	Not used	Not used
4	DAC ASSY	7028071381010-IL	7028071381010-IL	7028071381010-IL	7028071381020-IL	7028071381020-IL	7028071381020-IL
5	STBY ASSY	7028071382010-IL	7028071382020-IL	7028071382020-IL	7028071382030-IL	7028071382040-IL	7028071382040-IL
6	LED ASSY	7028071383010-IL	7028071383010-IL	7028071383010-IL	7028071383020-IL	7028071383020-IL	7028071383020-IL
14	JACK ASSY	7028071391010-IL	7028071391010-IL	7028071391010-IL	7028071391020-IL	7028071391020-IL	7028071391020-IL
⚠ 17	Power Trans	8200570300120-IL	8200570300130-IL	8200570300130-IL	Not used	Not used	Not used
⚠ 18	Power Trans	8200660300120-IL	8200660300130-IL	8200660300130-IL	8200660300150-IL	8200660300160-IL	8200660300160-IL
21	PIONEER Badge (AL)	PAN1376	BAM1004	VAM1124	PAN1376	BAM1004	VAM1124
23	Cabinet	3007211956010-IL	3007211956010-IL	3007211956000-IL	3007211956010-IL	3007211956010-IL	3007211956000-IL
24	Front Panel	3067215358130-IL	3067215358100-IL	3067215358110-IL	3067215358010-IL	3067215358020-IL	3067215358000-IL
25	Back Chassis	3207214076130-IL	3207214076120-IL	3207214076140-IL	3207214076010-IL	3207214076020-IL	3207214076030-IL
26	Bottom Chassis	3207214086000-IL	3207214086000-IL	3207214086000-IL	Not used	Not used	Not used
27	Panel Frame	3210212191100-IL	3210212191100-IL	3217212191300-IL	3210212191100-IL	3210212191100-IL	3217212191300-IL
28	Lens (Remocon)	3710210683000-IL	3710210683000-IL	3710210683100-IL	3710210683000-IL	3710210683000-IL	3710210683100-IL
30	Insulator (PLS)	4000210391000-IL	4000210391000-IL	4007210391000-IL	4000210391000-IL	4000210391000-IL	4007210391000-IL
32	Cushion (SR Sheet)	4050213795000-IL	4050213795000-IL	4050213795000-IL	Not used	Not used	Not used
39	Knob ASSY	5088211391400-IL	5088211391400-IL	5088211391300-IL	5088211391400-IL	5088211391400-IL	5088211391300-IL
43	Screw	BBZ30P080FTB	BBZ30P080FTB	BBZ30P080FNI	BBZ30P080FTB	BBZ30P080FTB	BBZ30P080FNI
45	Screw, Tap Tite	B020030083B11-IL	B020030083B11-IL	B020030083B11-IL	Not used	Not used	Not used
52	Screw	1500040083B10-IL	1500040083B10-IL	1500040084B10-IL	1500040083B10-IL	1500040083B10-IL	1500040084B10-IL

10. SCHEMATIC DIAGRAM

10.1 JACK ASSY

ADAPTOR PORT

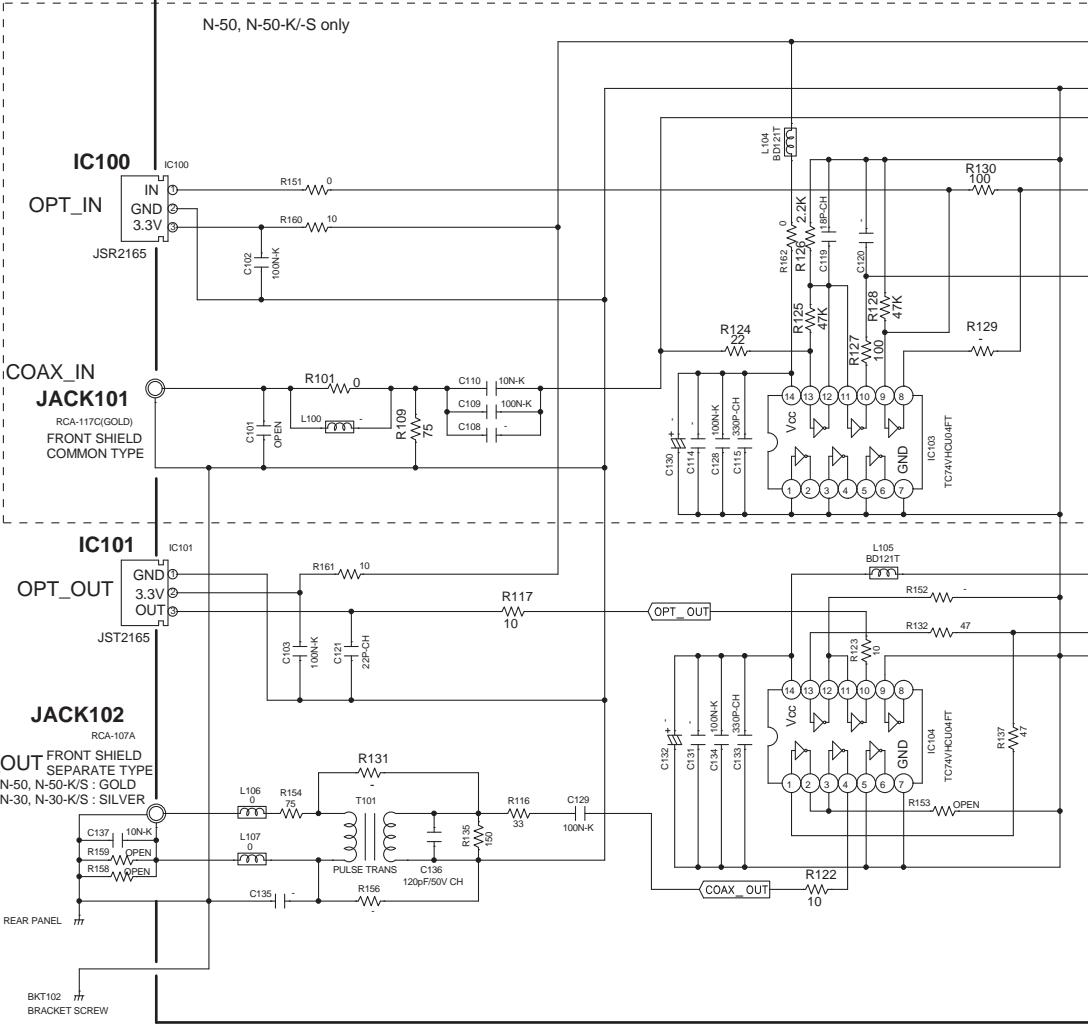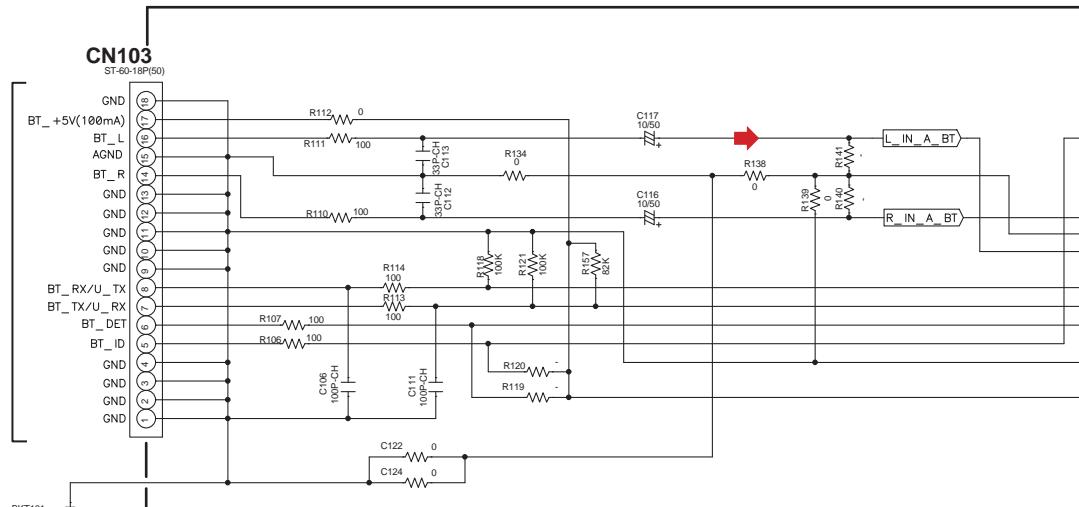

A

44

N-50

1


2

3

4


A JACK ASSY

(N-50, N-50-K/-S: 7028071391010-IL)
(N-30, N-30-K/-S: 7028071391020-IL)

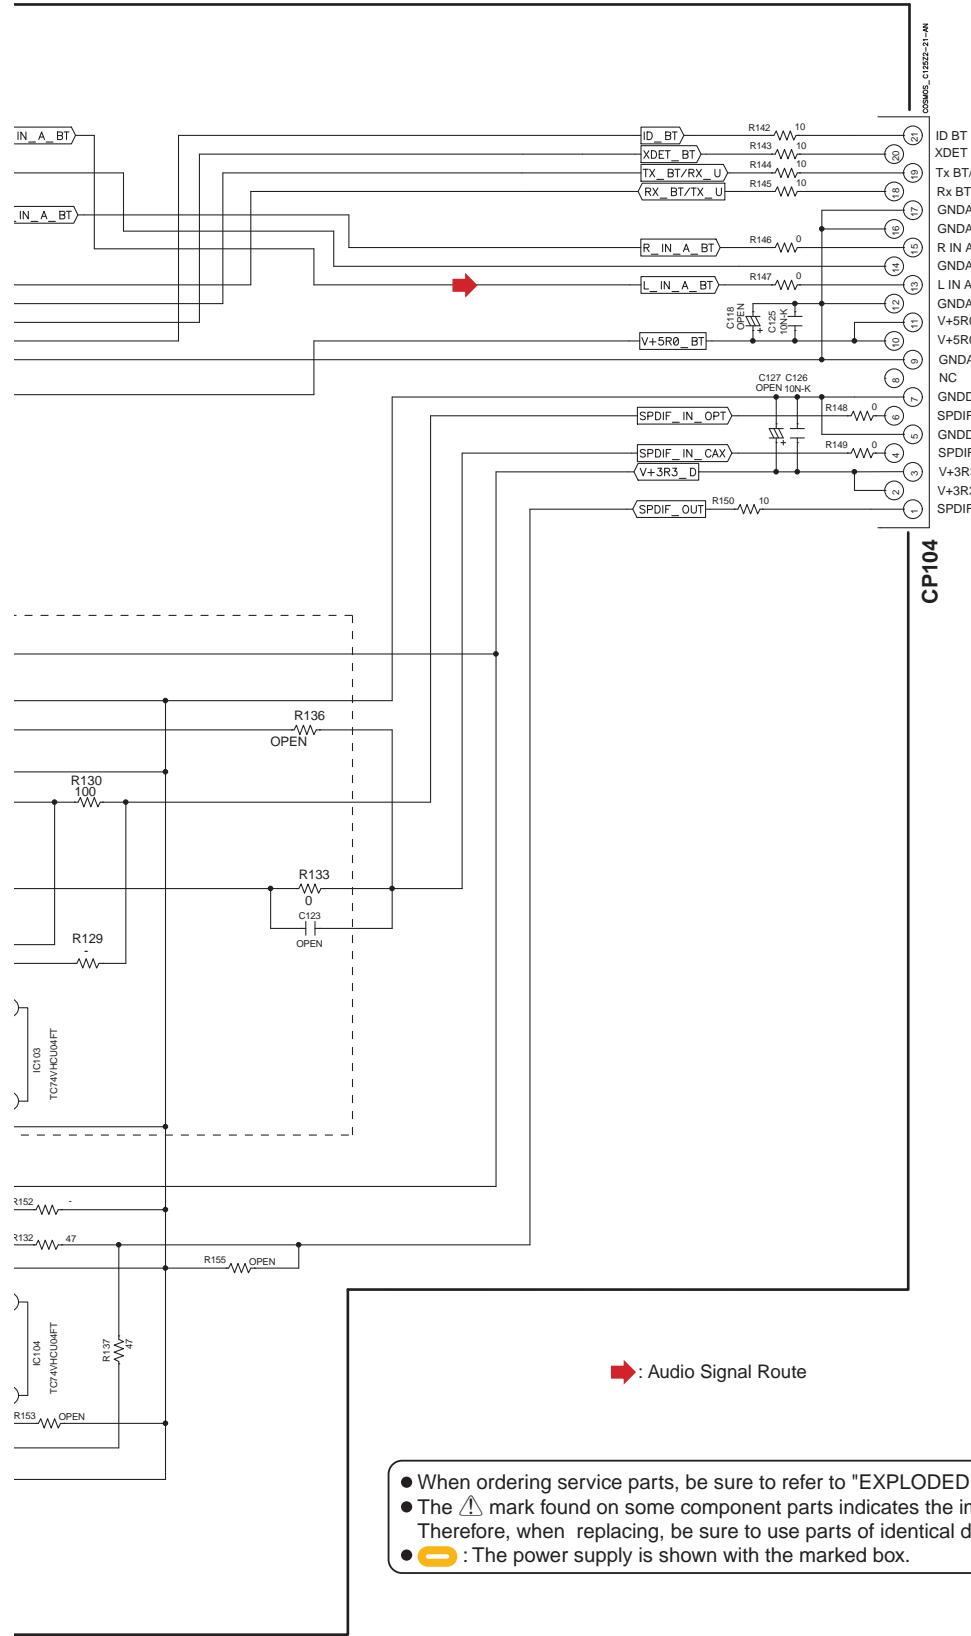


10.2 D-MAIN ASSY (1/5)


A

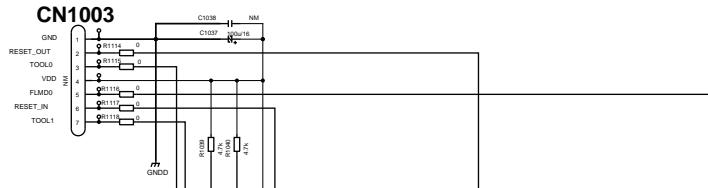


B

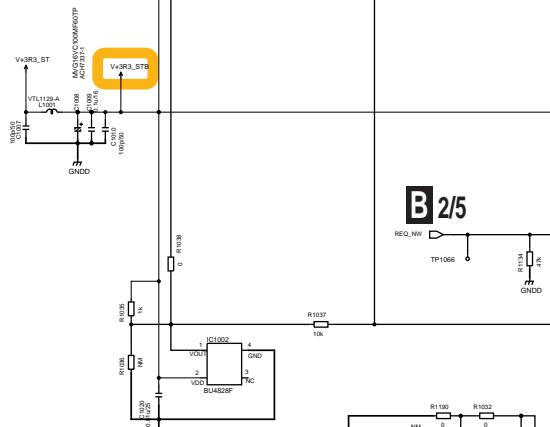


C

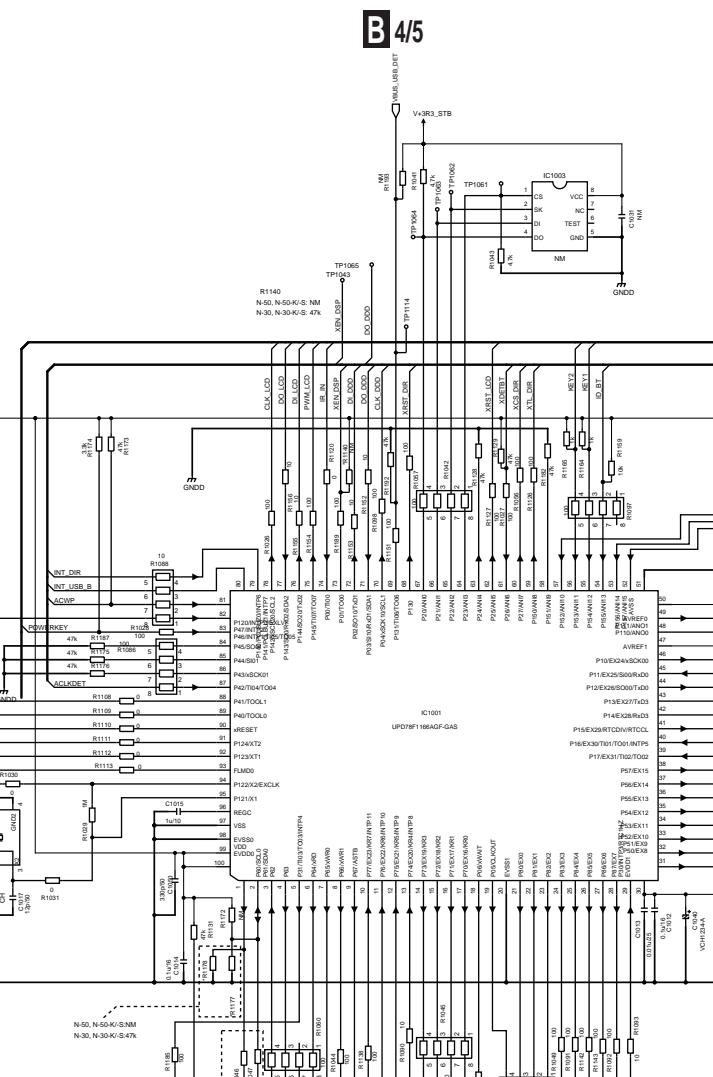

D

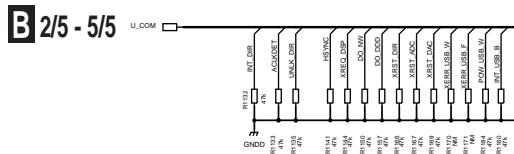

E

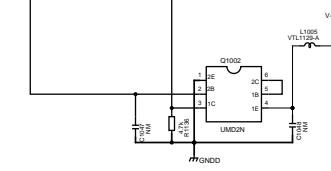


F

B 1/5

46

B1/5 D-MAIN ASSY (1/5)
(N-50, N-50-K/S: 7028071361010-IL)
(N-30, N-30-K/S: 7028071361020-IL)

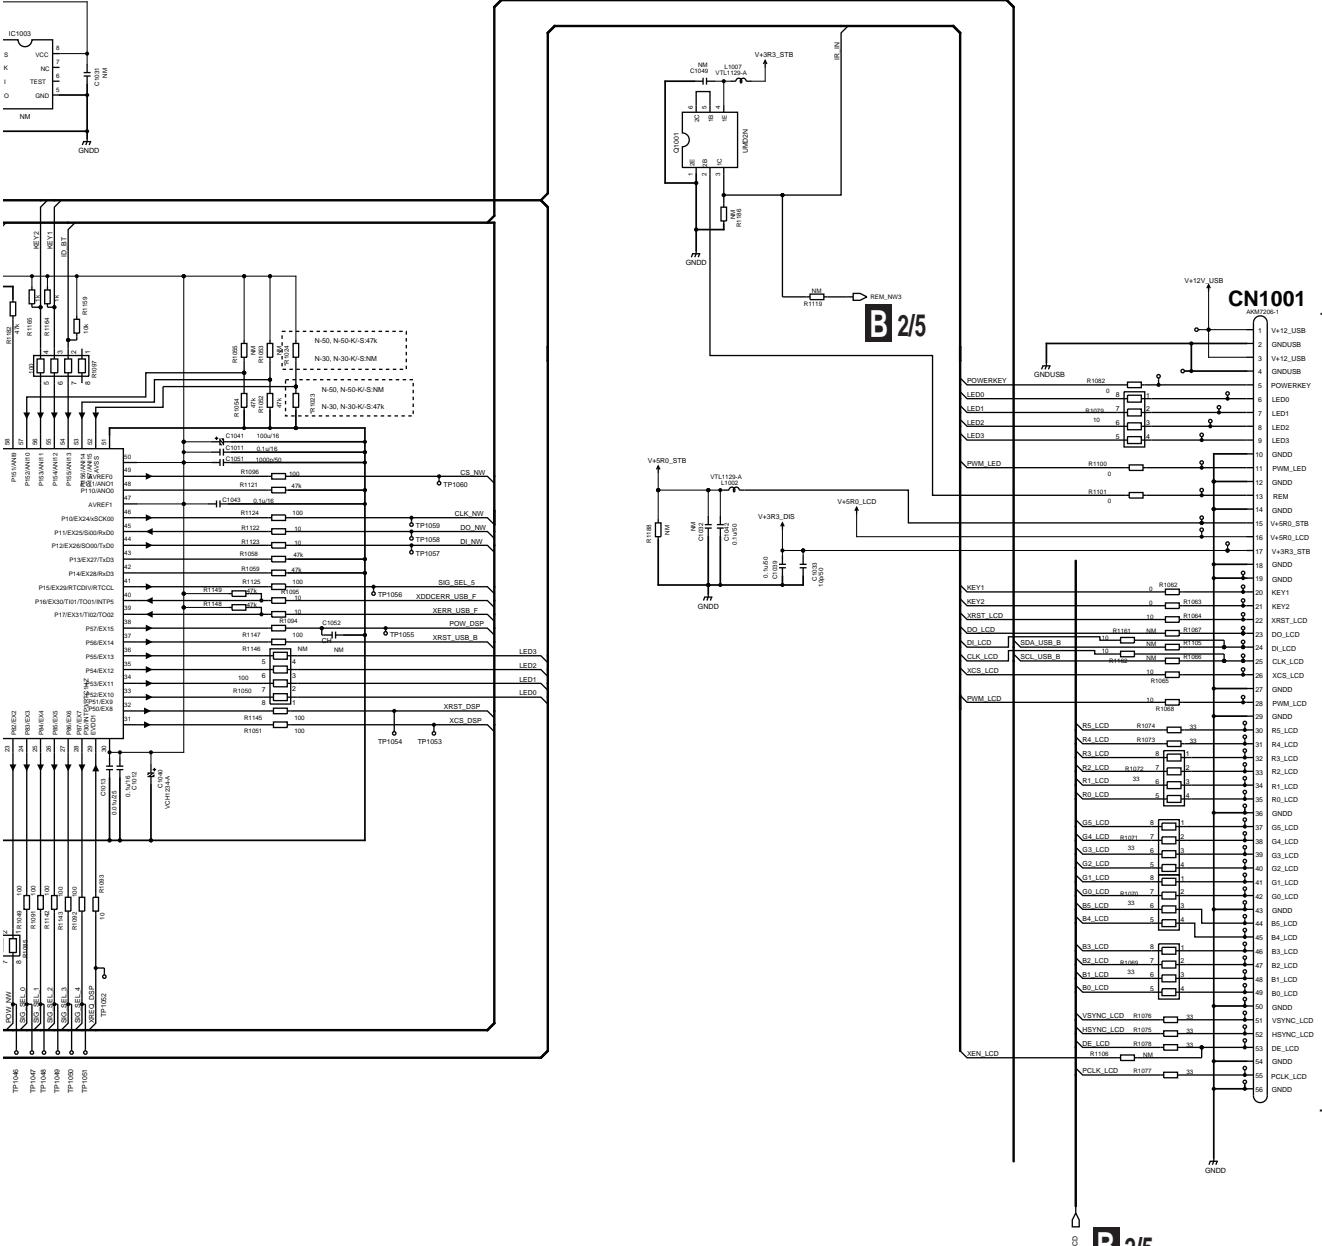

L
CN702


B1/5

47

N-50


10.3 D-MAIN ASSY (2/5)

A

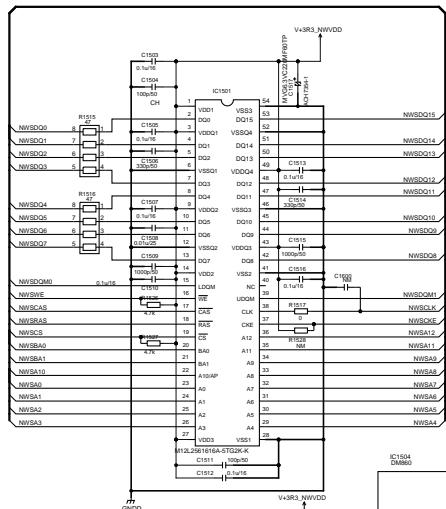


• The L
There


B

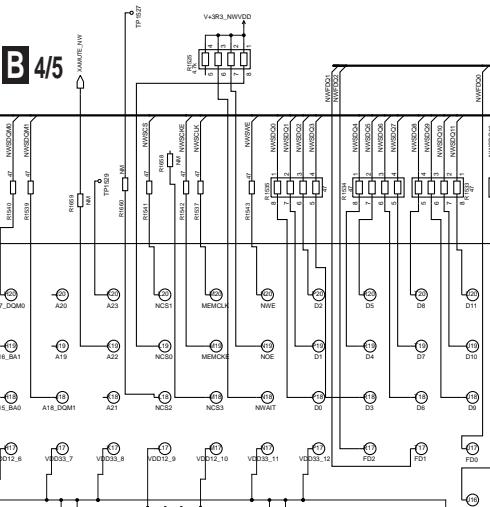

B 1/5, 3/5 - 5/5

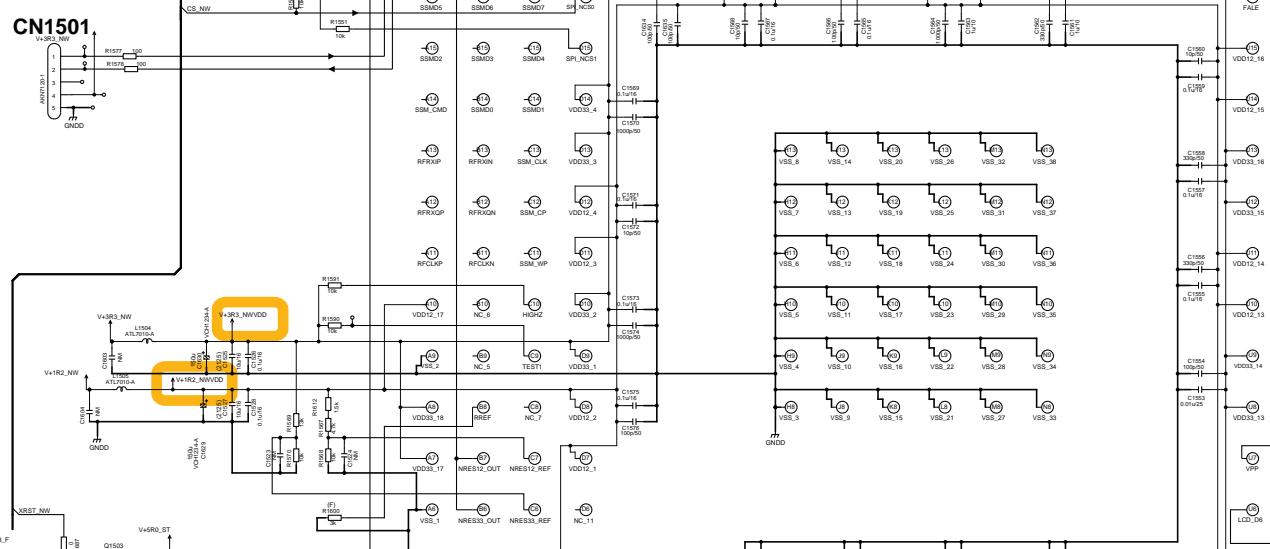


C

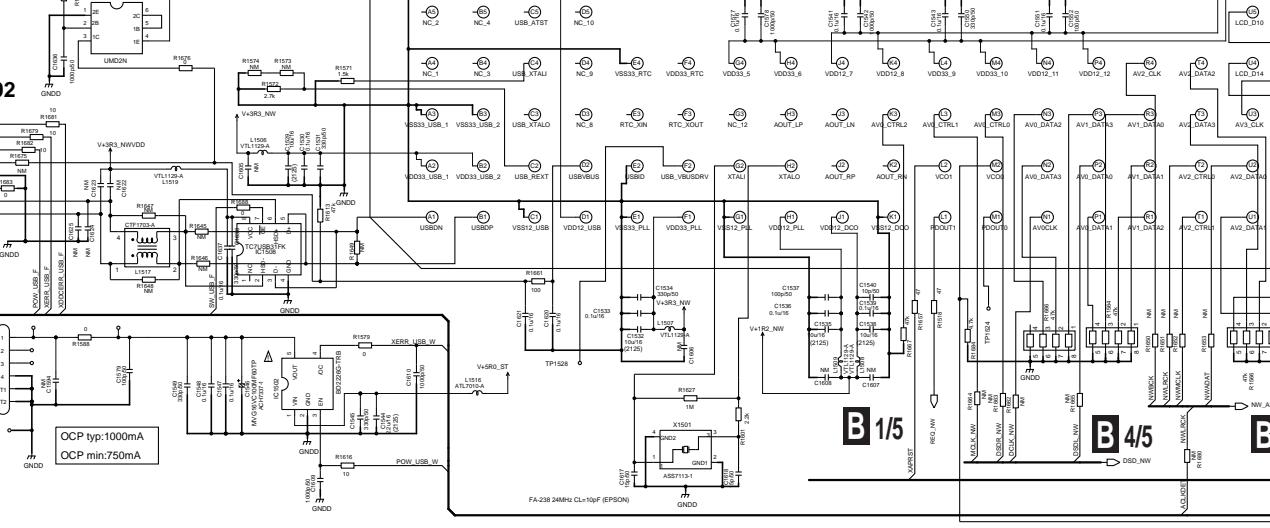

F

DC
OUTPUT

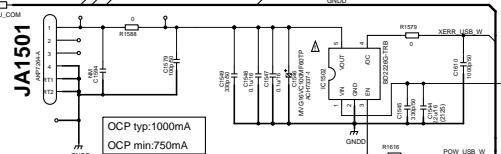


B 2/5

B2/5 D-MAIN ASSY (2/5)


(N-50, N-50-K/-S: 7028071361010-IL)
(N-30, N-30-K/-S: 7028071361020-IL)

- The mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

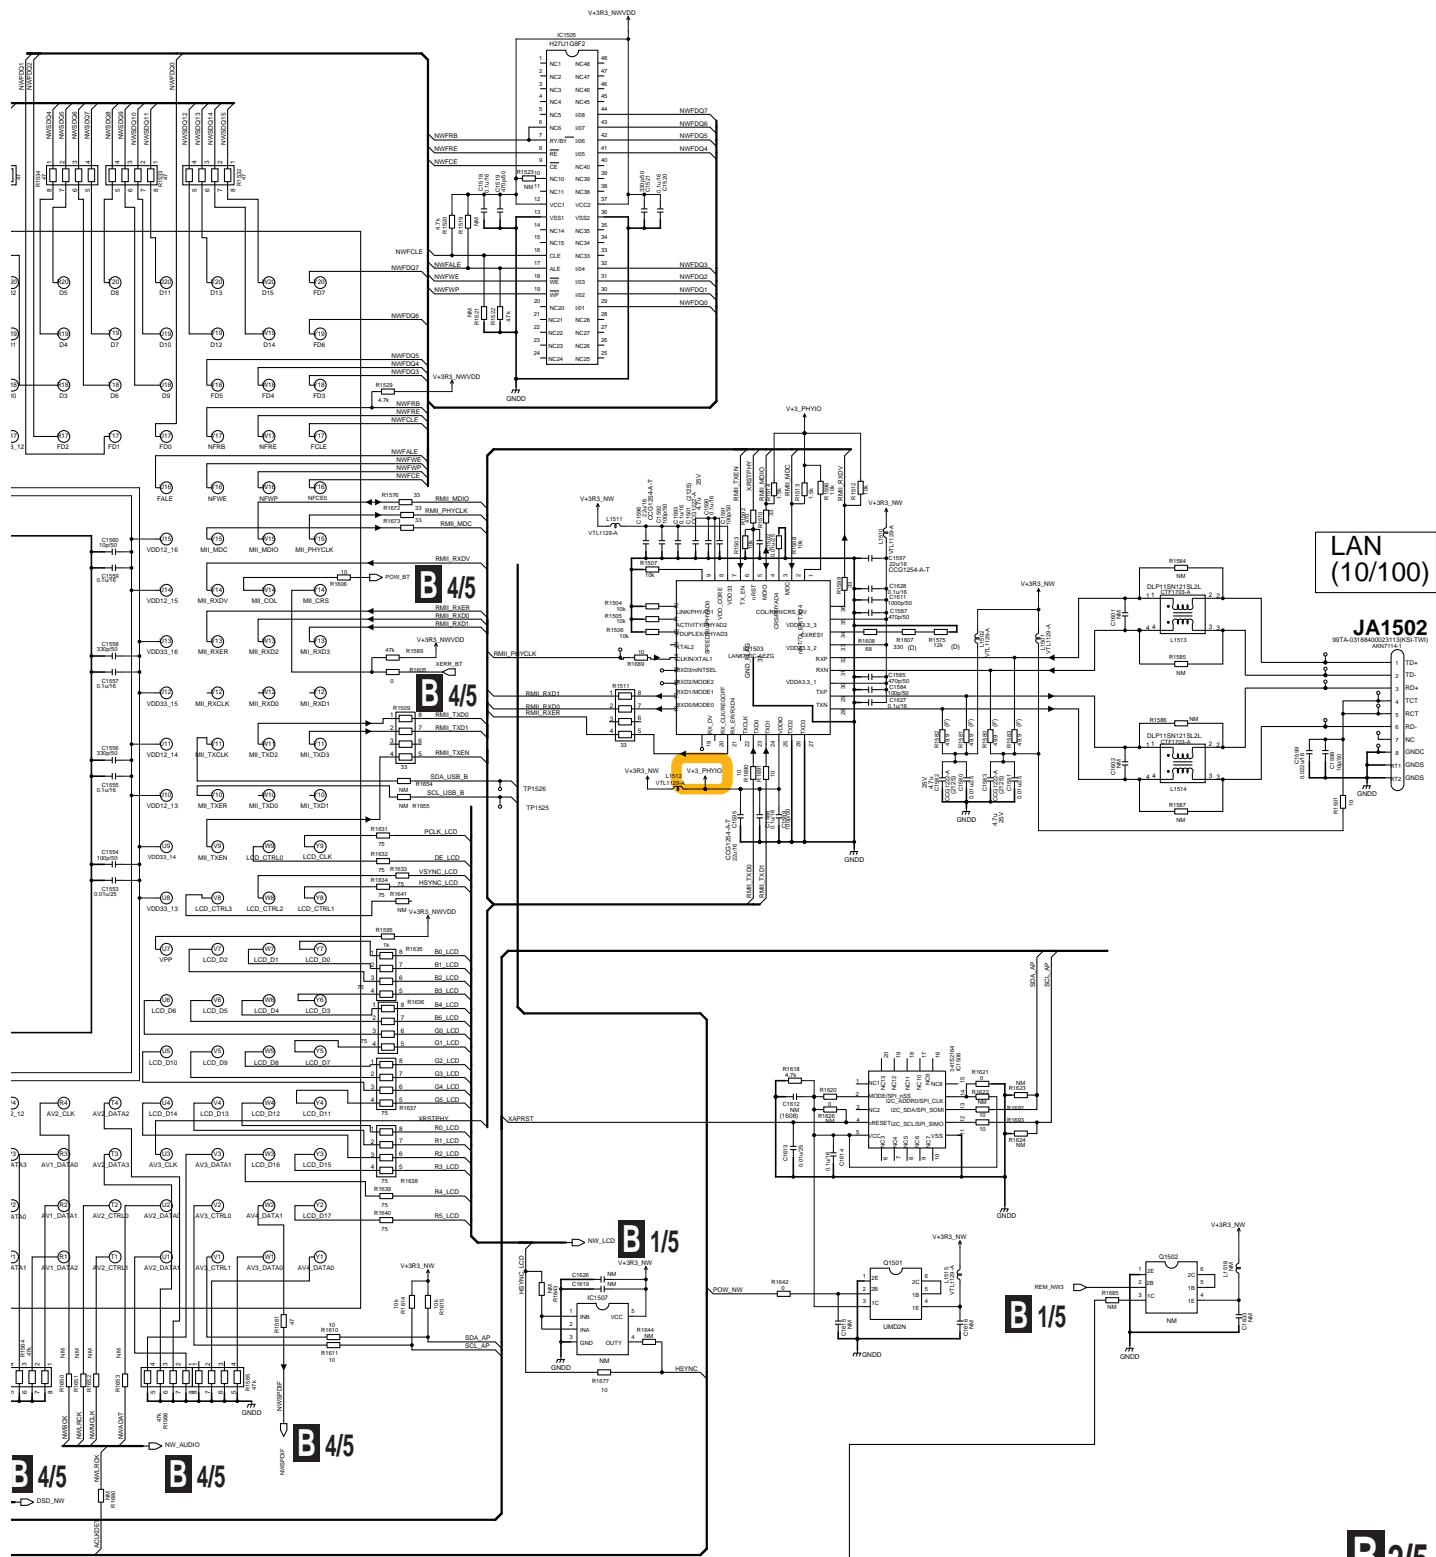


10.4 D-MAIN ASSY (3/5)

A

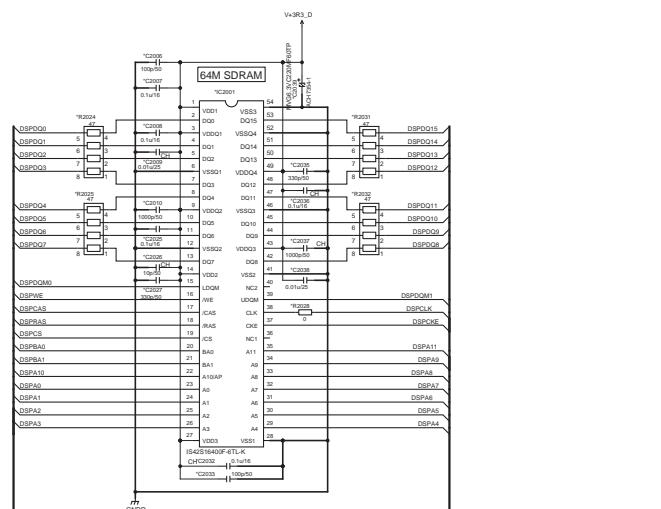

B

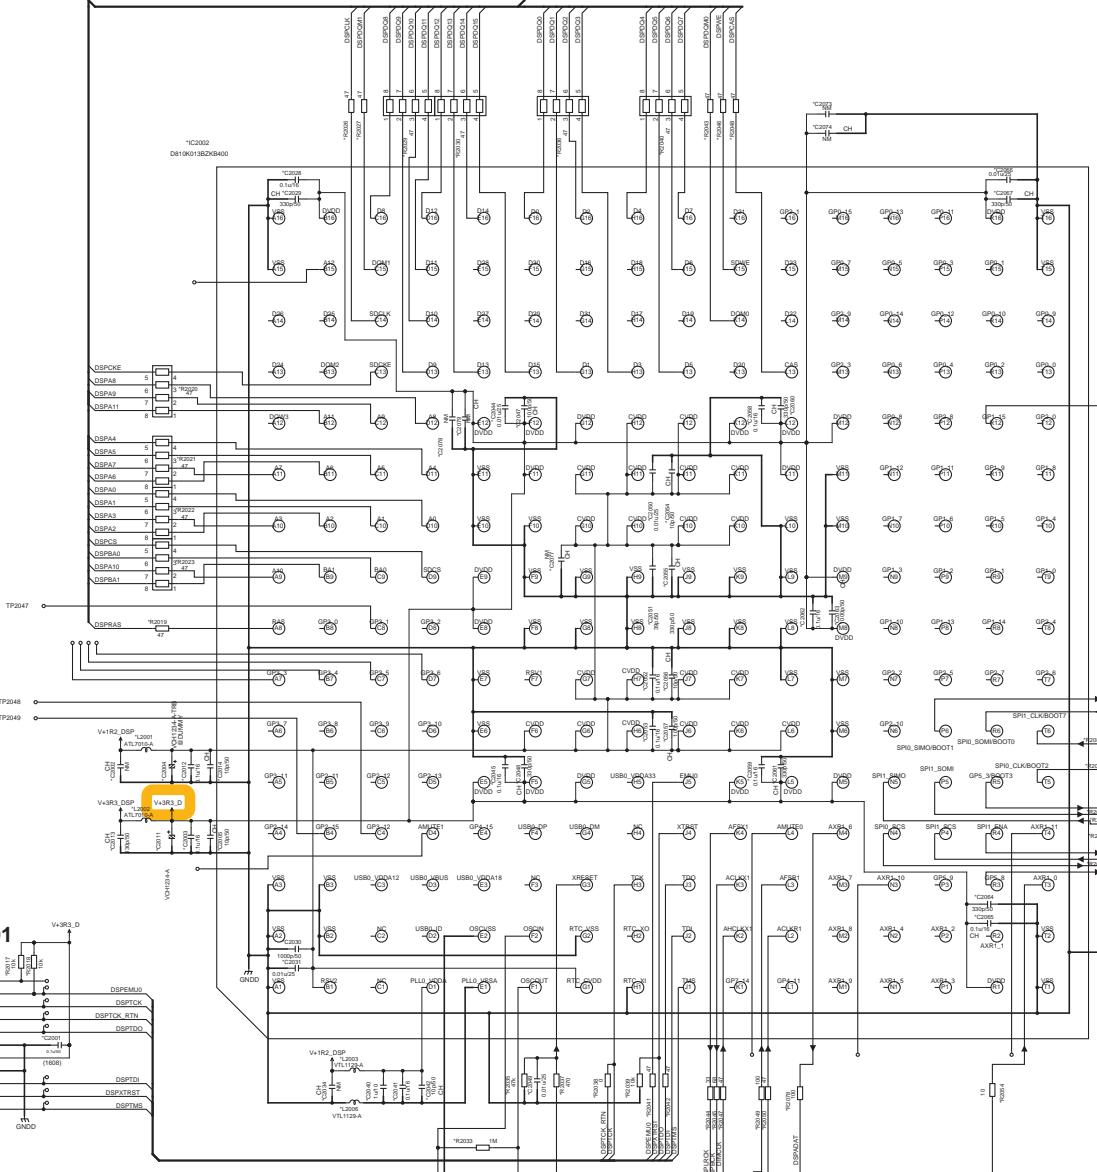

C

D

E

F


B 3/5

B 4/5

B 4/5

B3/5 D-MAIN ASSY (3/5)
(N-50, N-50-K/-S: 7028071361010-IL) A

B 1/5, 2/5, 4/5, 5/5

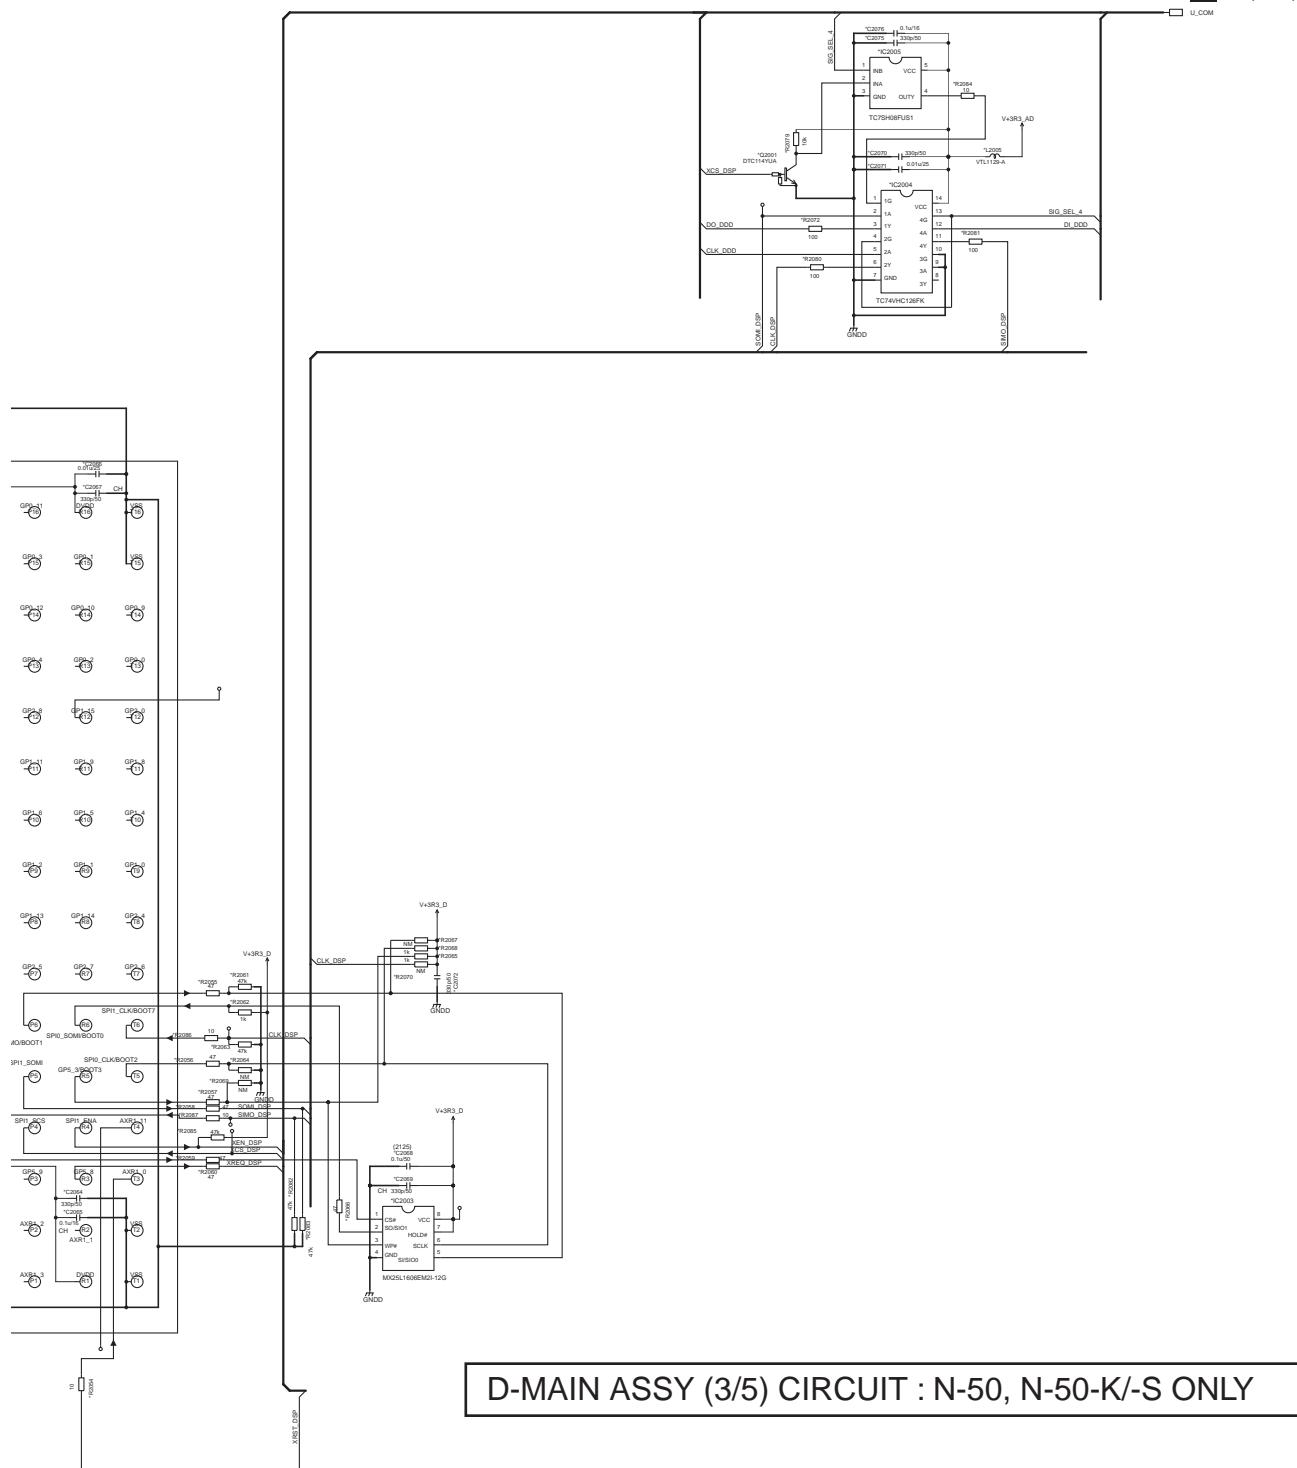

4/5

B 3/5

51

10.5 D-MAIN ASSY (4/5)

1

2


3

4

A


B 1/5 - 3/5, 5/5

U.COM

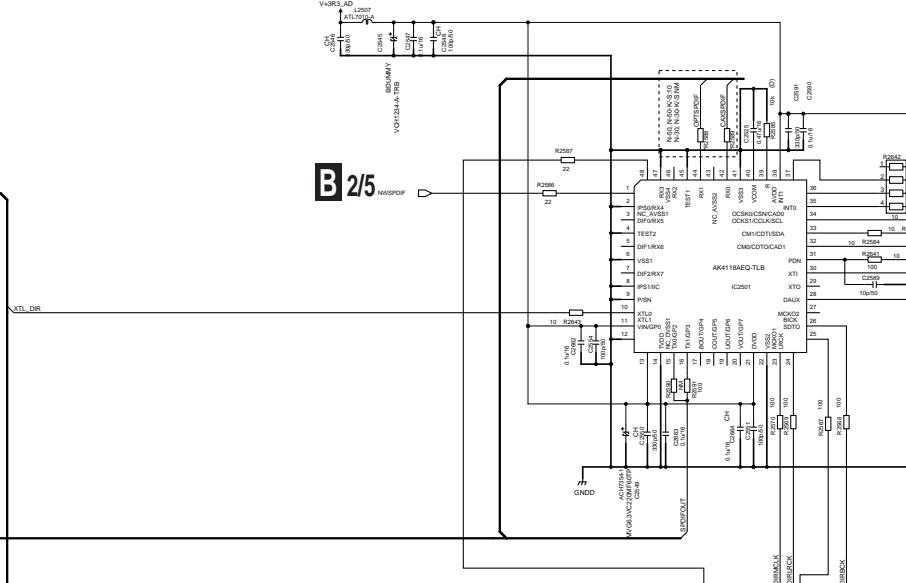


B

B 2/5

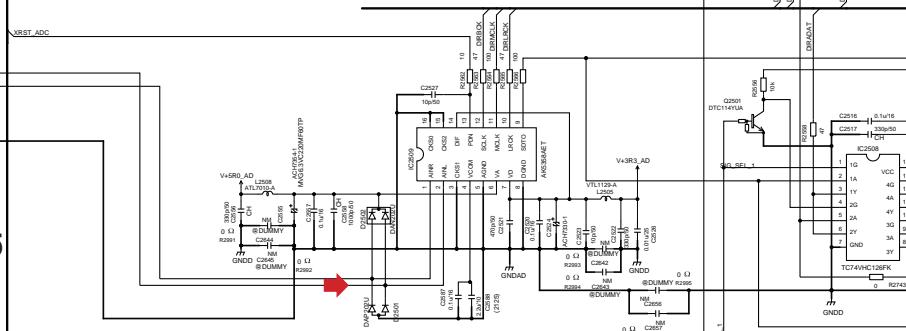

C


B 2/5

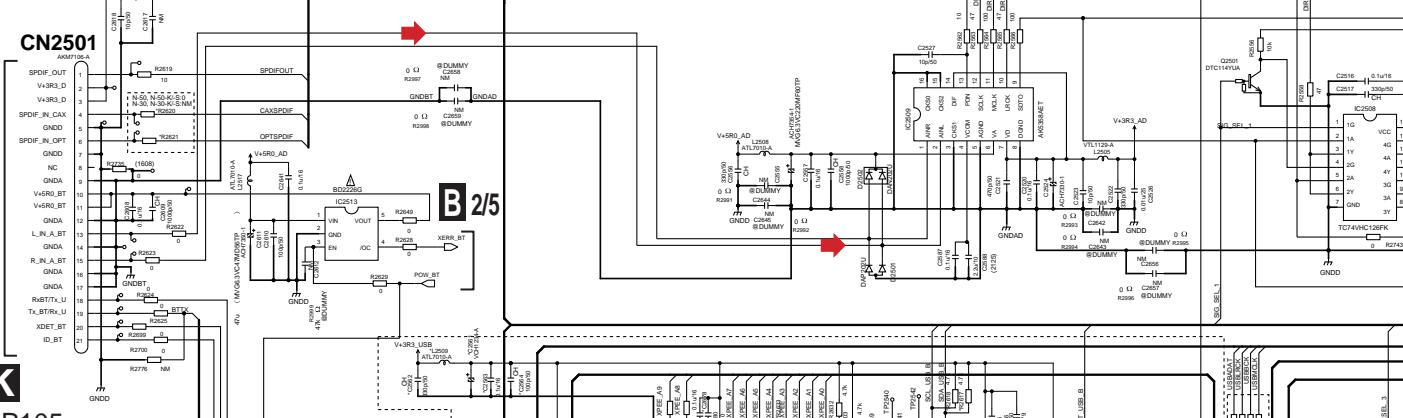

D


K

CP105

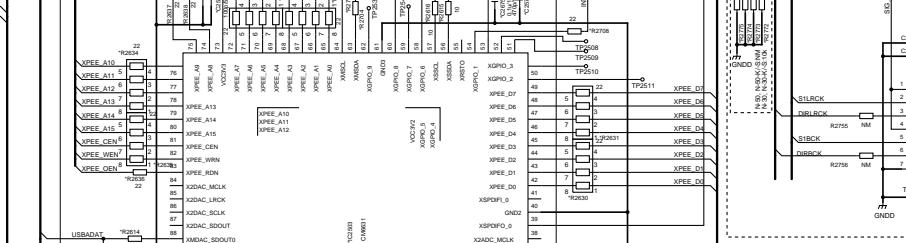


E

B 2/5

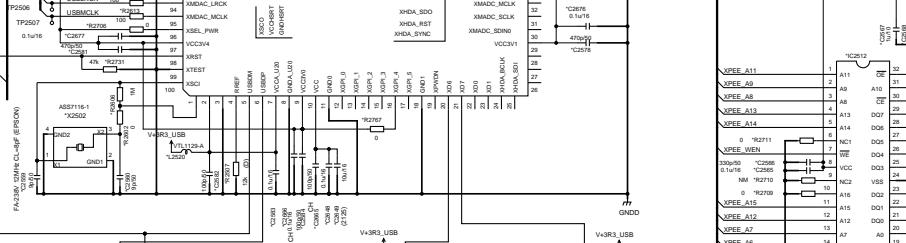

F

JA2501

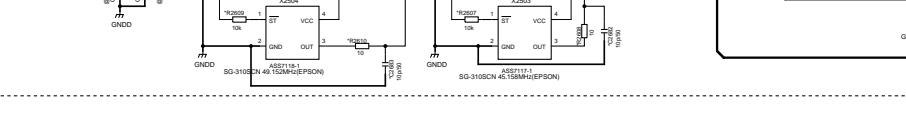

N-50, N-50-K/S only

B 4/5

N-50

52

2

3

4

1


2

3

4


B4/5 D-MAIN ASSY (4/5)

(N-50, N-50-K/-S: 7028071361010-IL)
(N-30, N-30-K/-S: 7028071361020-IL)

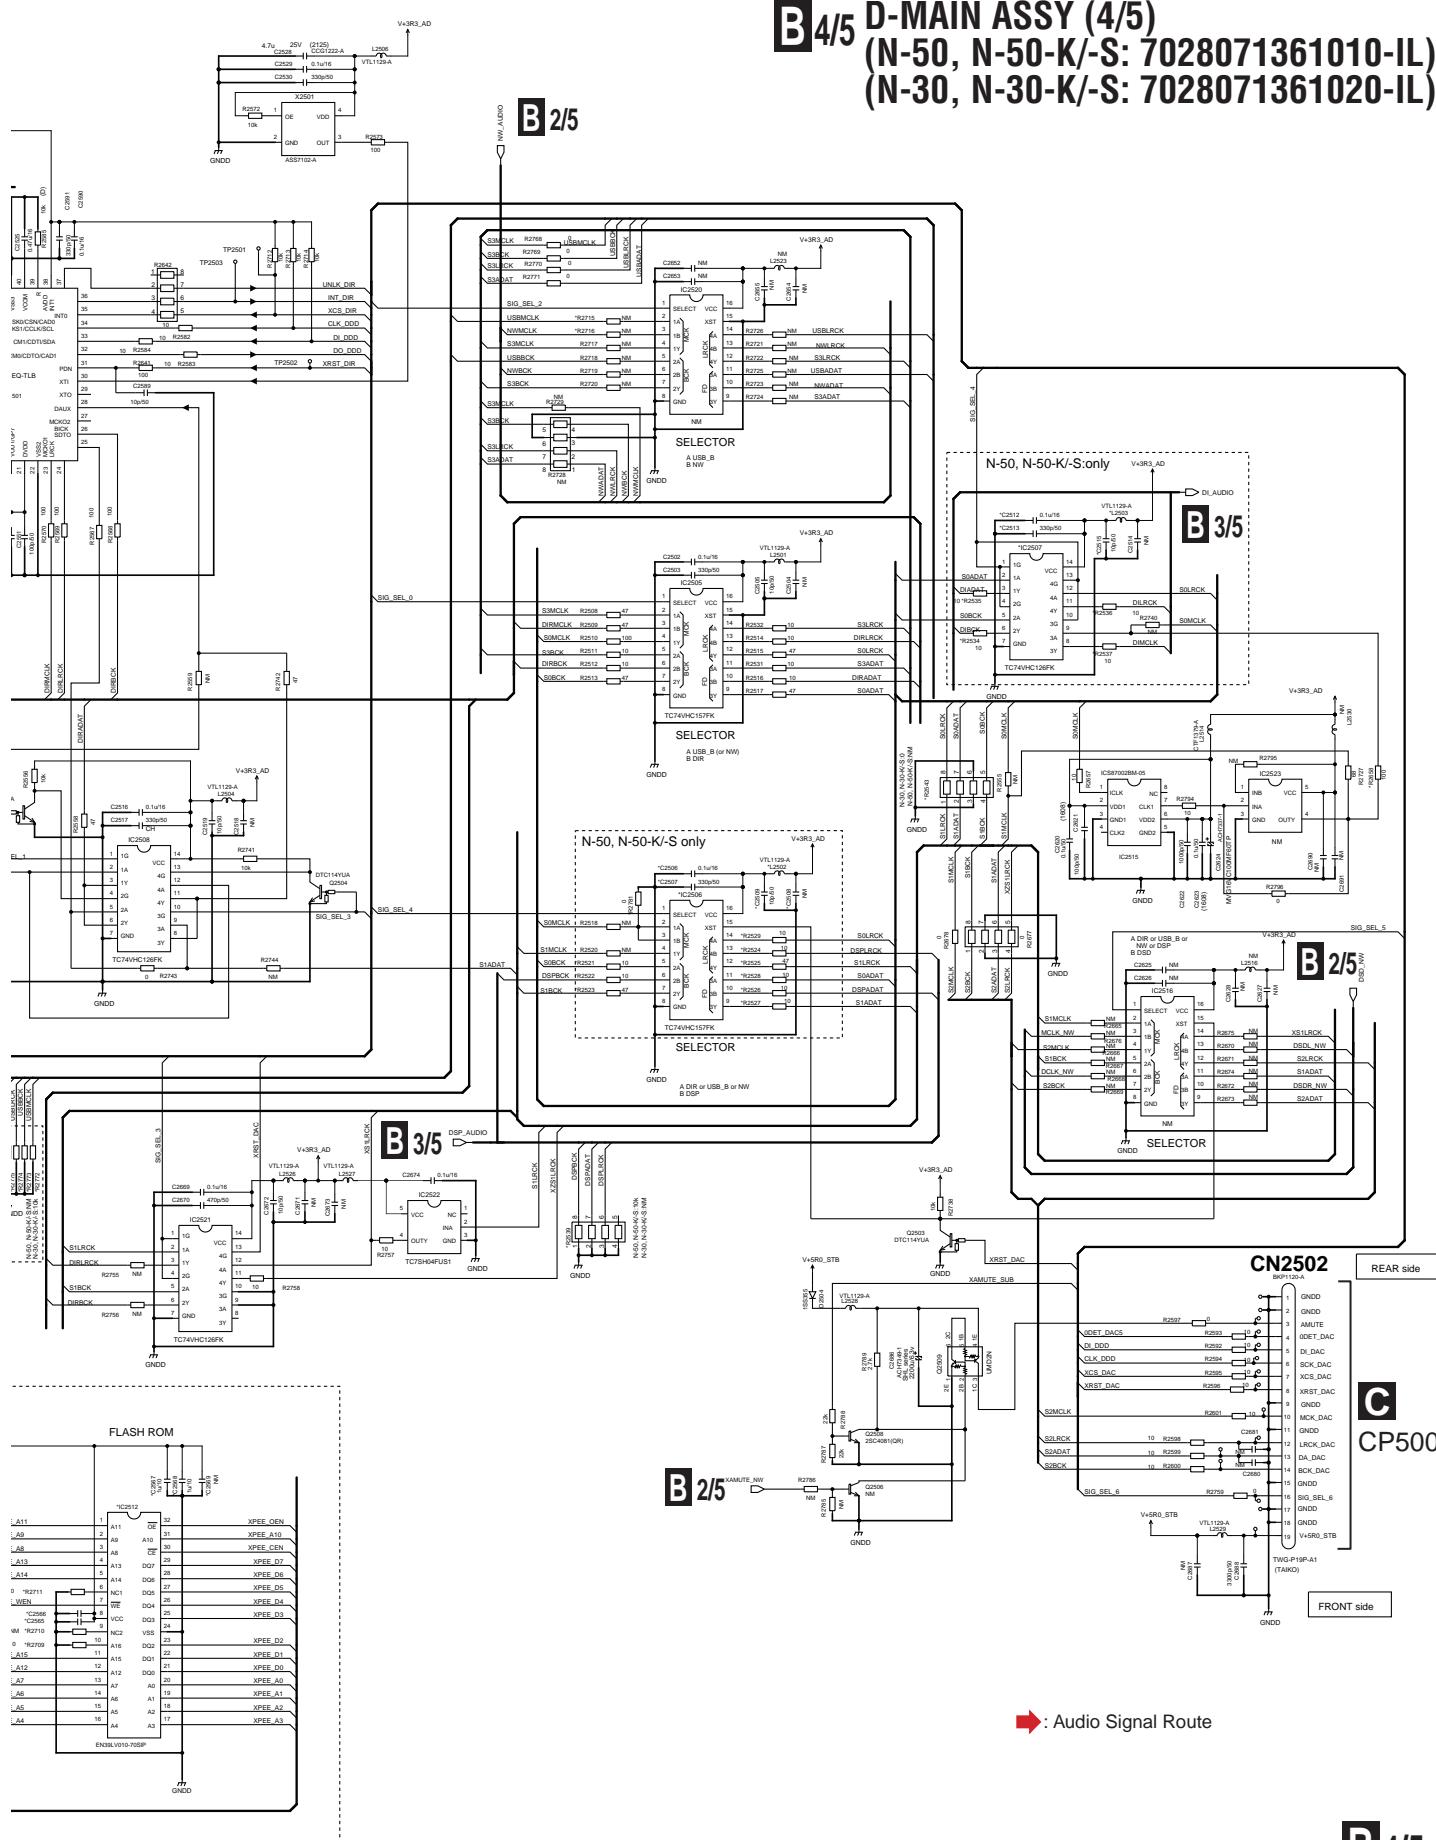

10.6 D-MAIN ASSY (5/5)

A

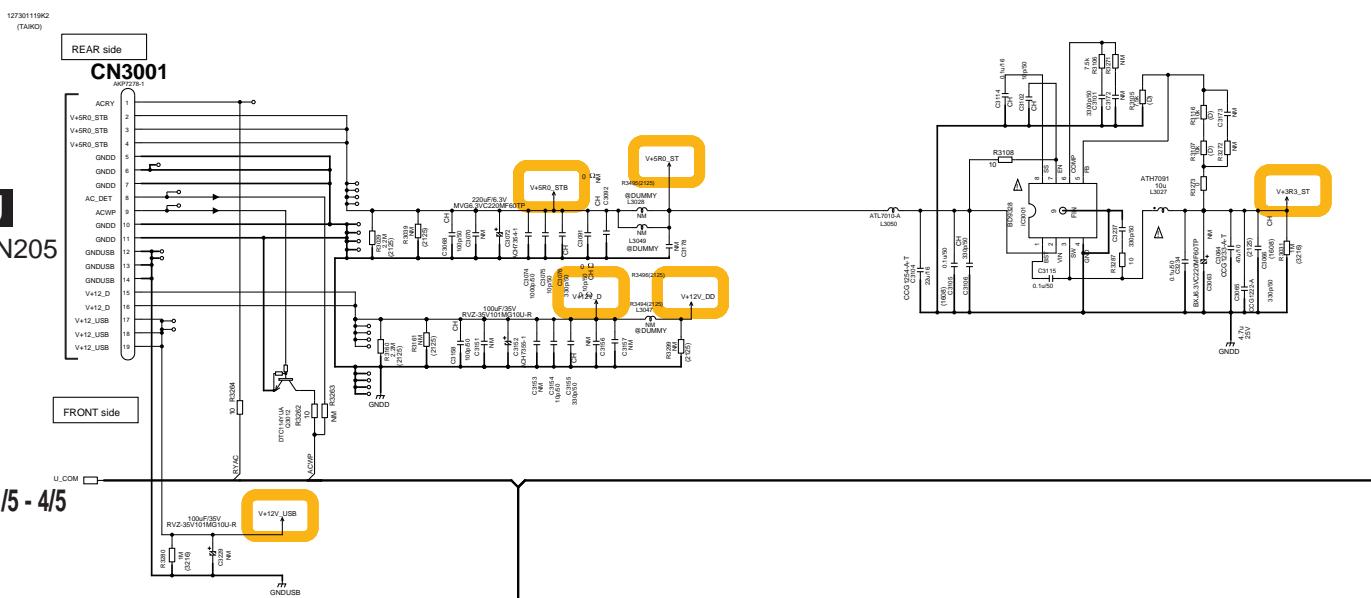

- The mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

N-50

B 5/5

54










1

2

3


4

B 5/5 D-MAIN ASSY (5/5)
(N-50, N-50-K/-S: 7028071361010-IL)
(N-30, N-30-K/-S: 7028071361020-IL)

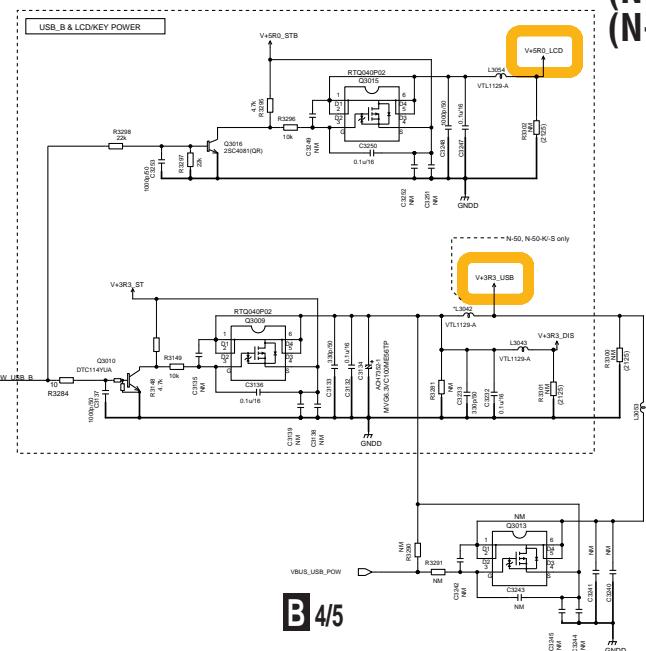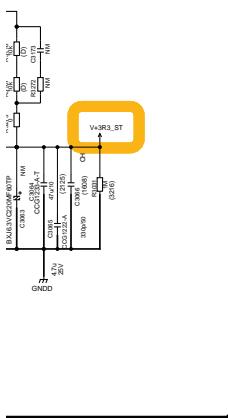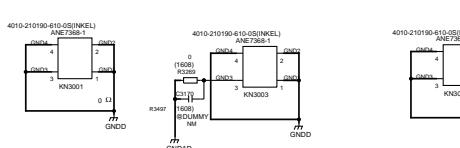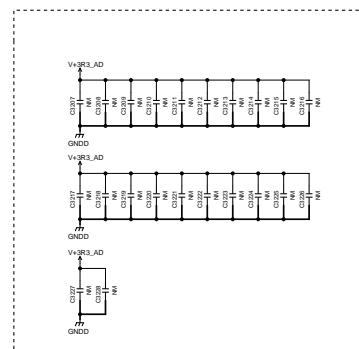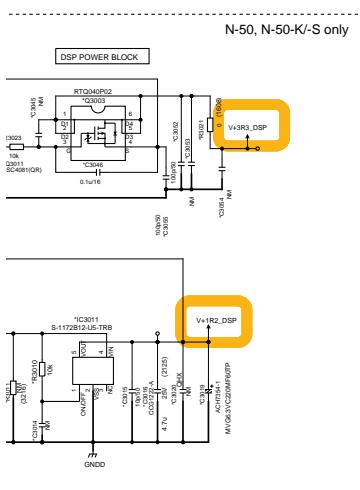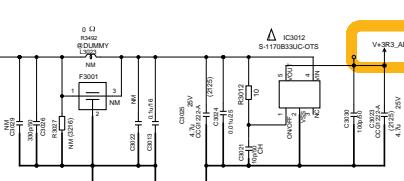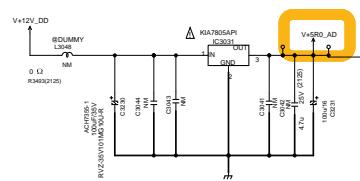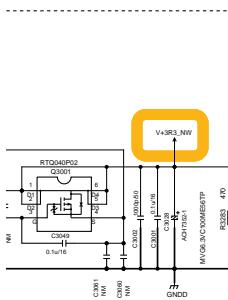**B 4/5****N-50**

10.7 DAC ASSY

A

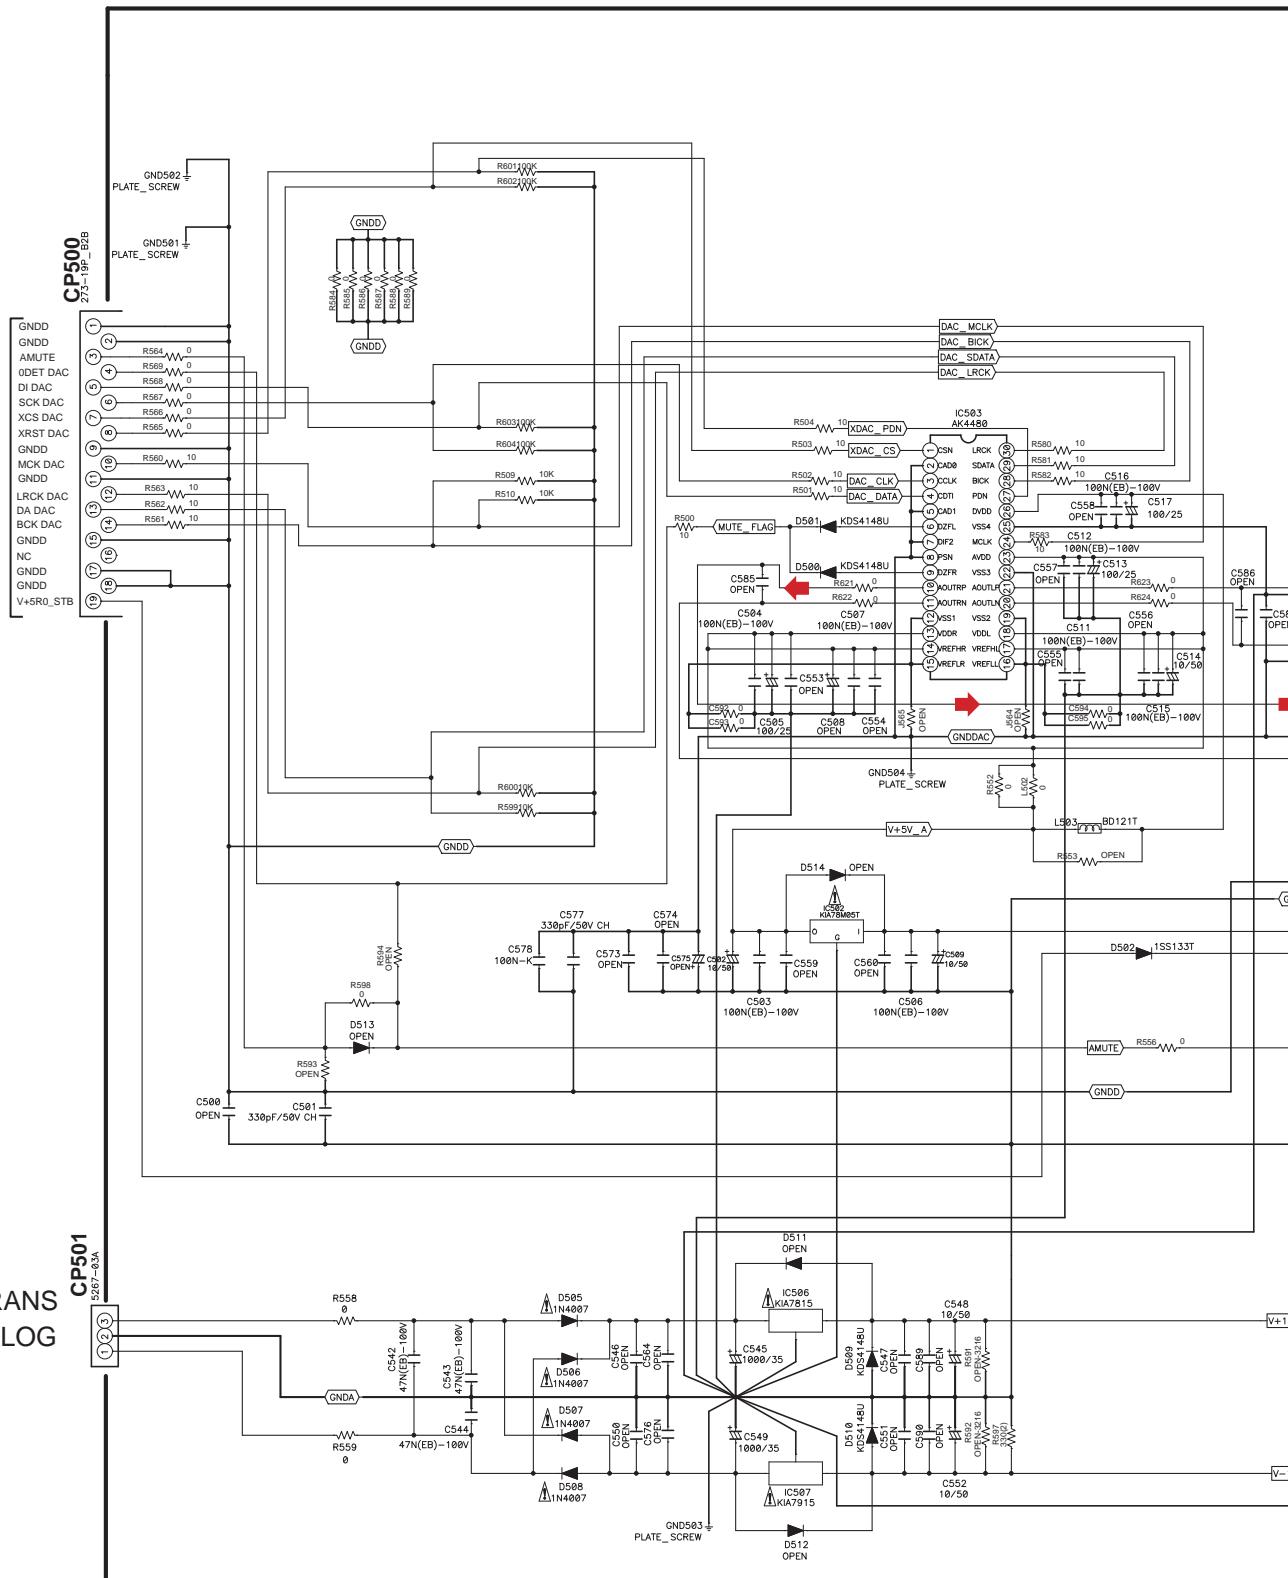

B

C


D

E FROM TRANS
FOR ANALOG

C

56

C DAC ASSY
(N-50, N-50-K-S: 7028071381010-IL)
(N-30, N-30-K-S: 7028071381020-IL)

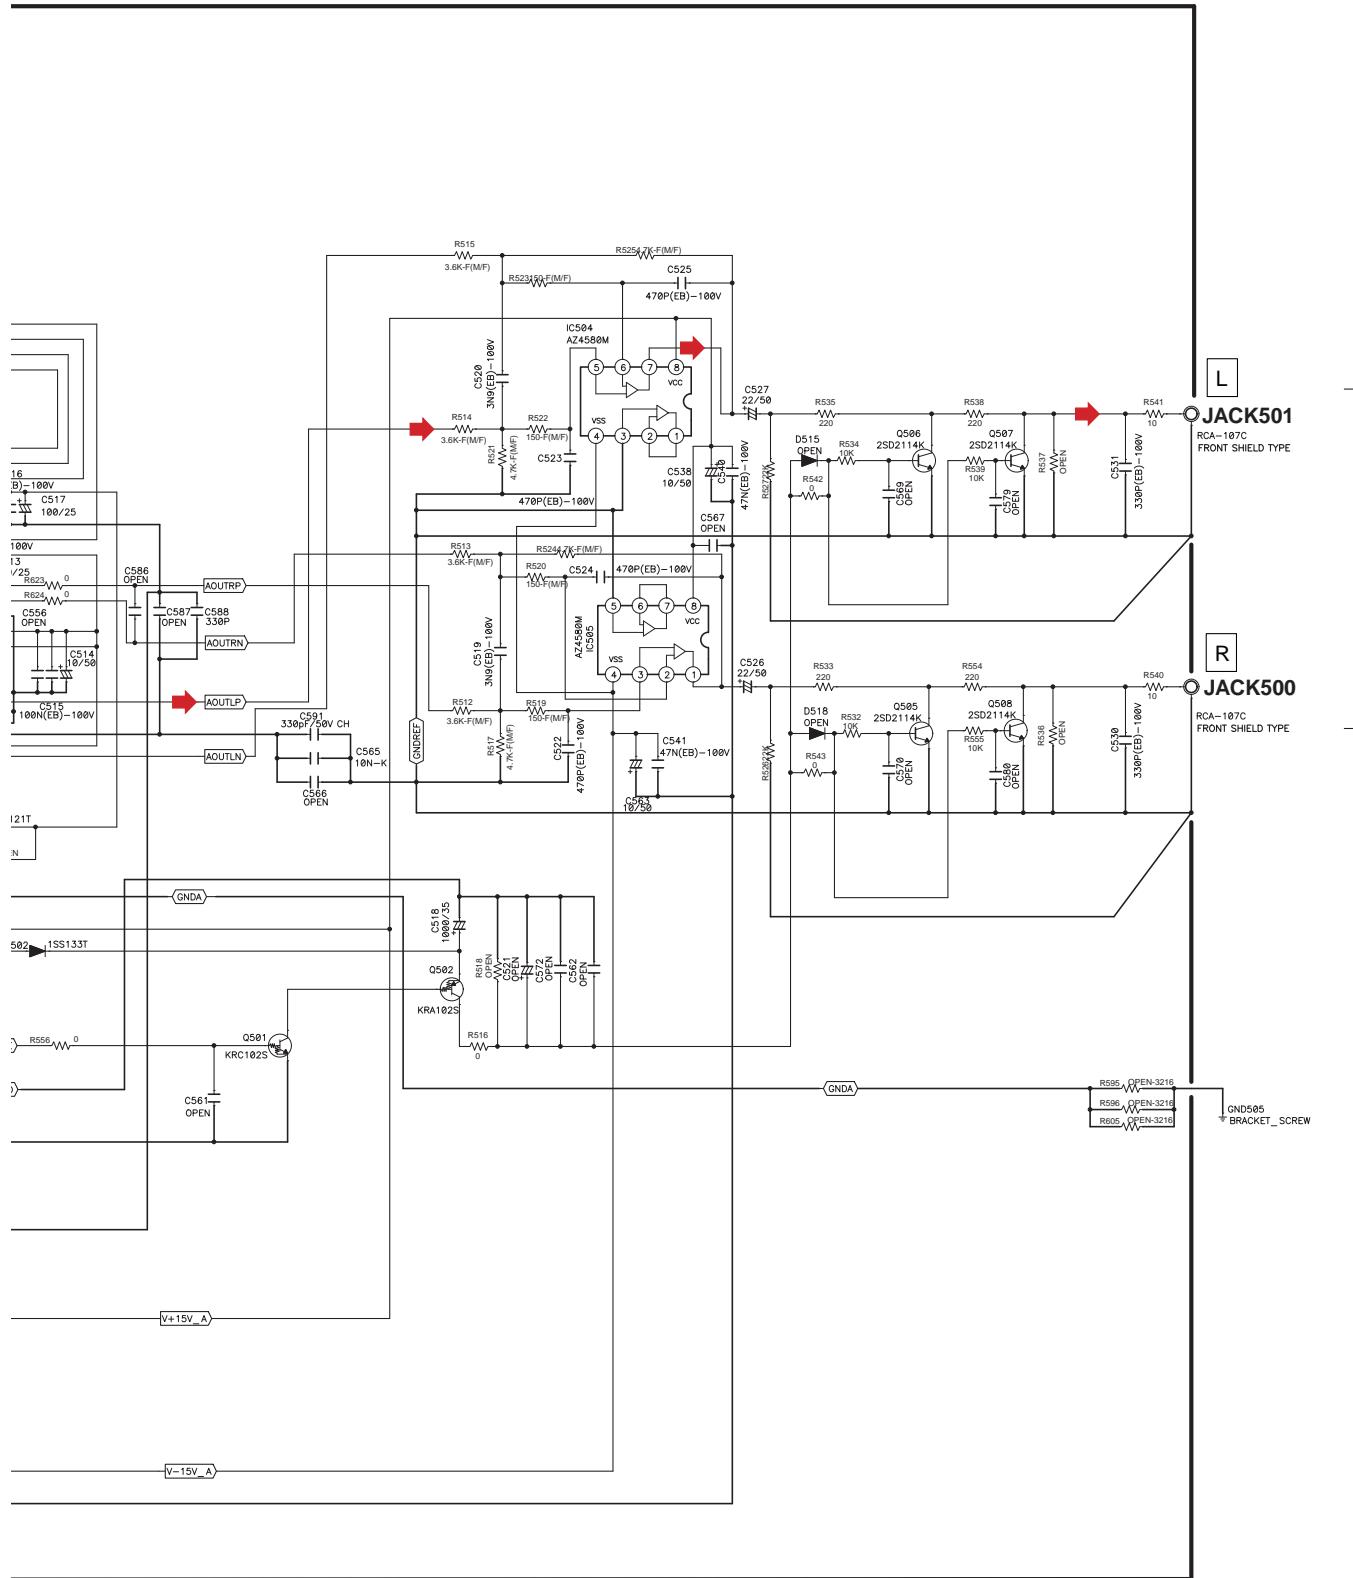


▶ : Audio Signal Route

- The △ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.


N-50

1 2 3 4
10.8 LCD/KEY ASSY

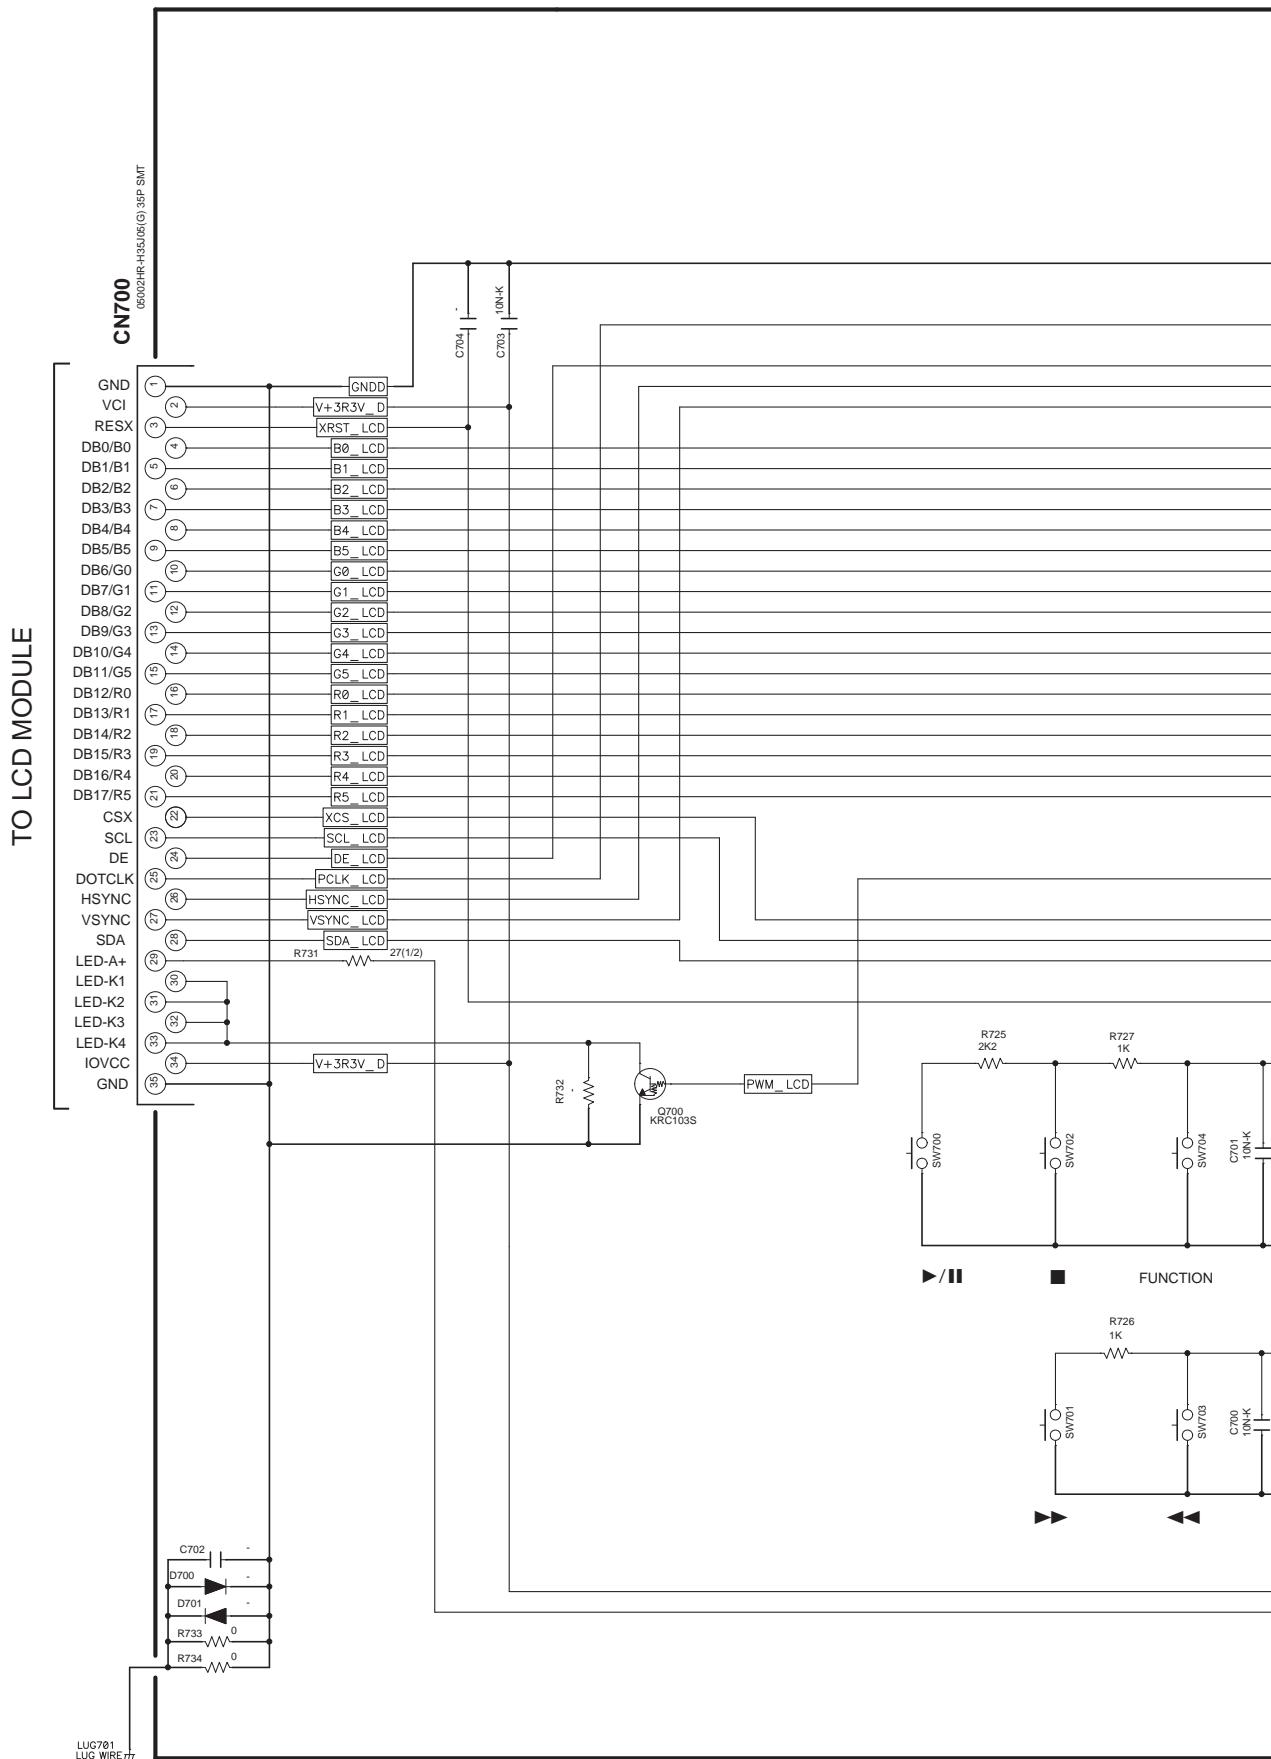


D

**D LCD/KEY ASSY
(7028071392010-IL)**

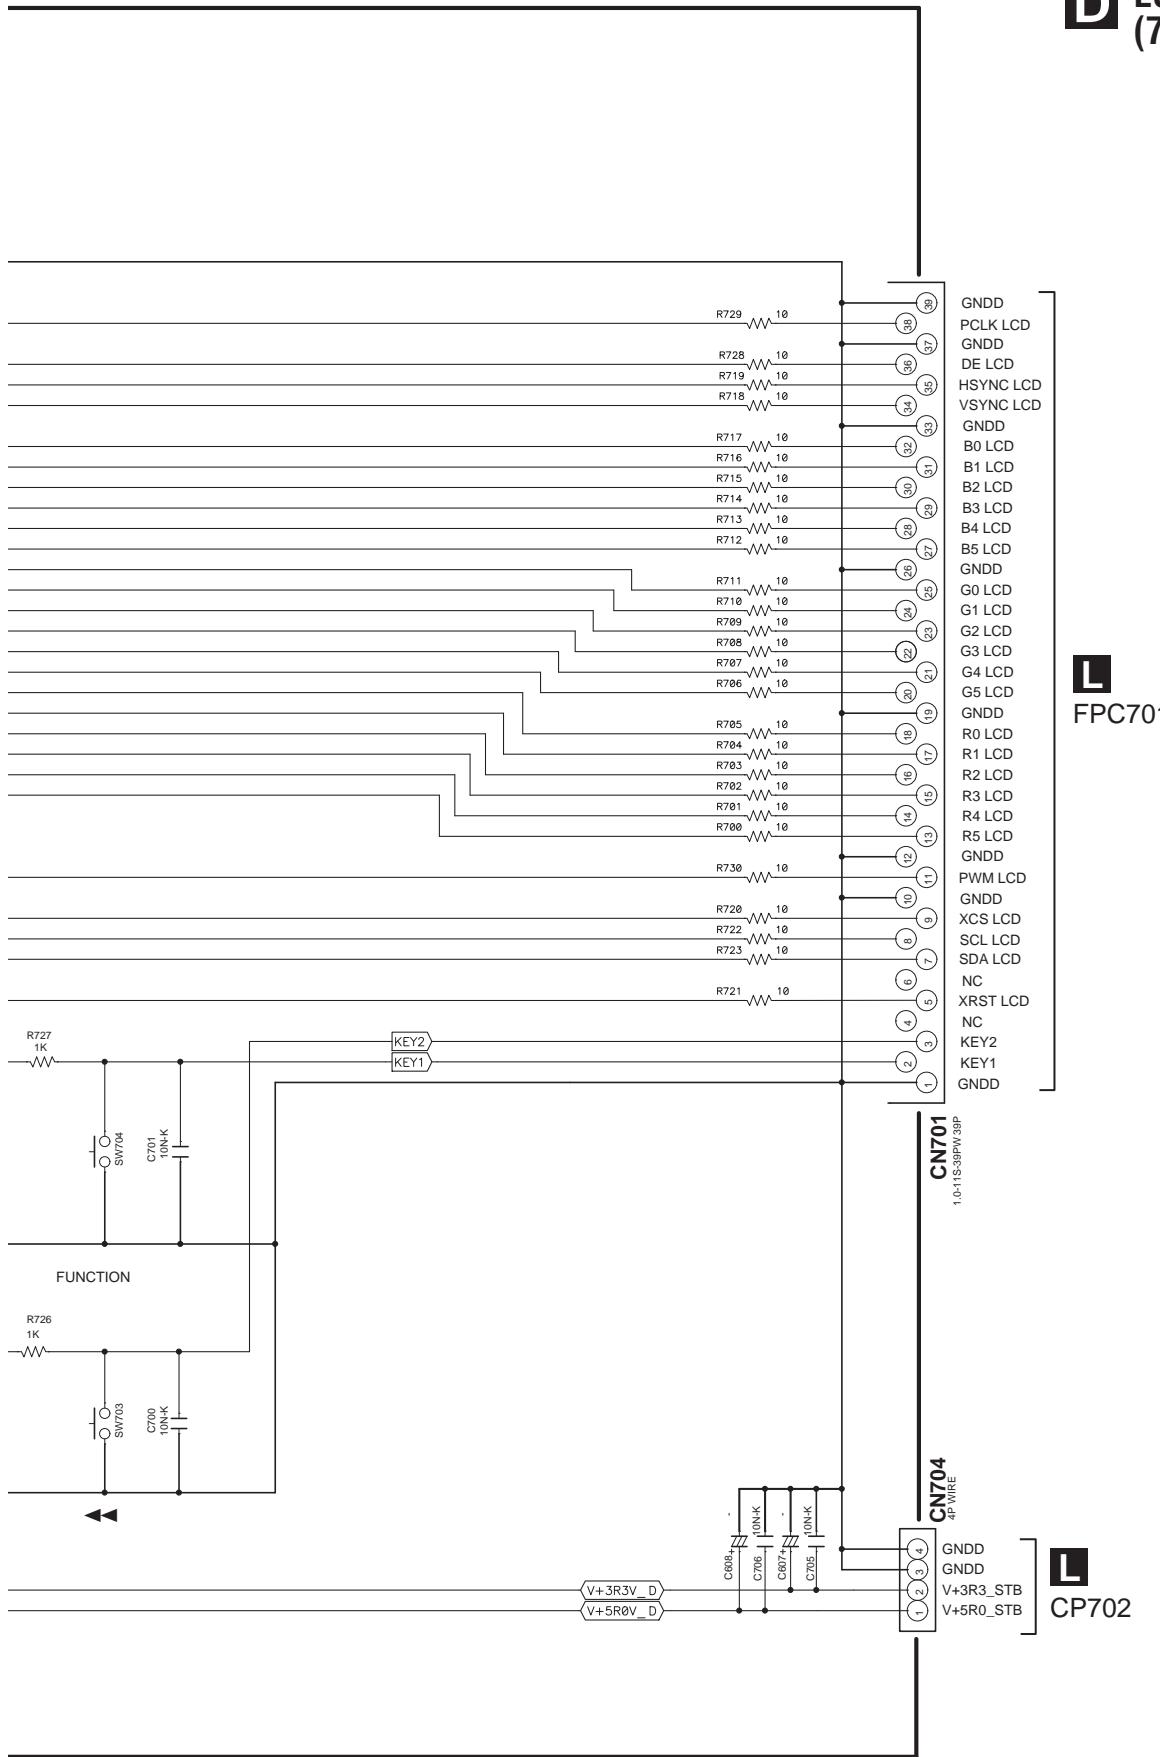


1 2 3 4
10.9 LED ASSY, POWER SW ASSY, IR ASSY AND POWER LED ASSY


**F POWER SW ASSY
(7028071385010-IL)**

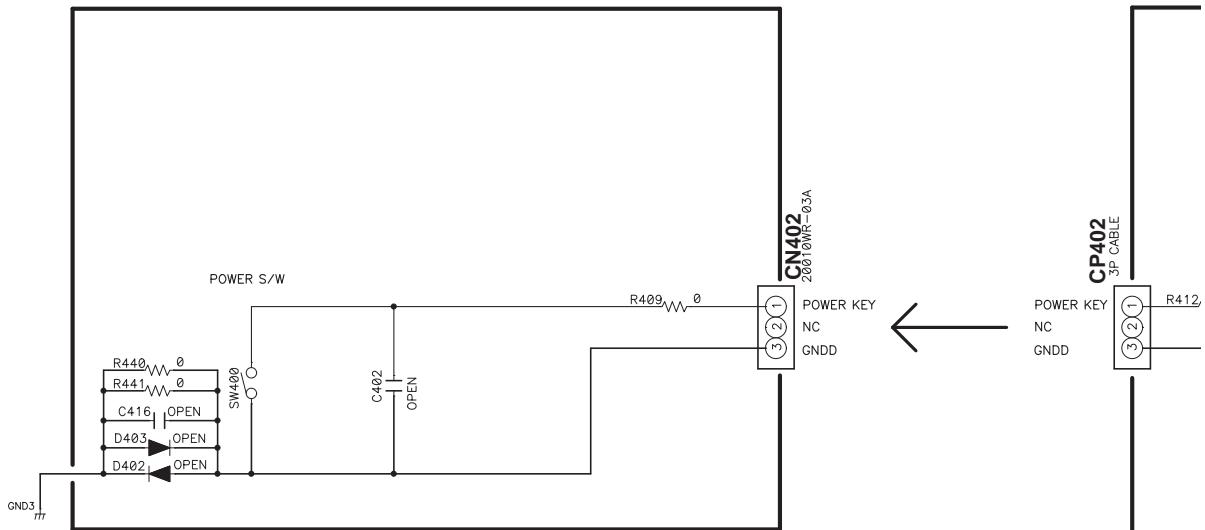

**G IR ASSY
(7028071386010-IL)**

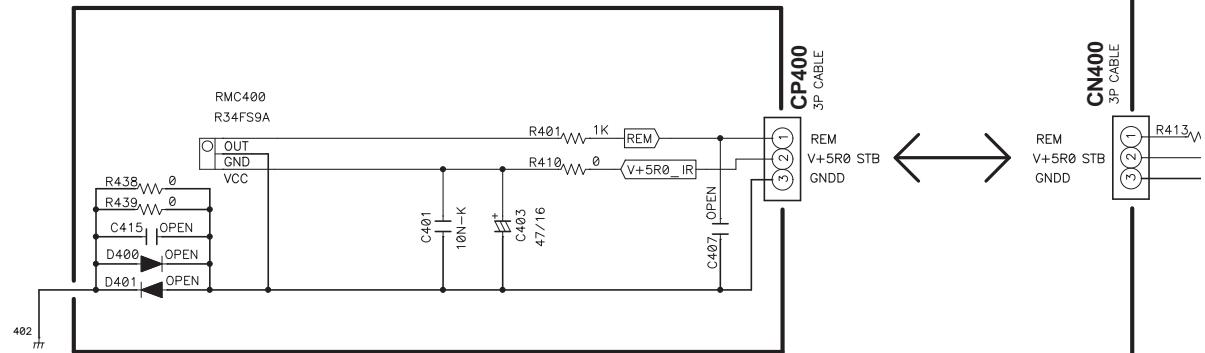


**H POWER LED ASSY
(7028071384010-IL)**

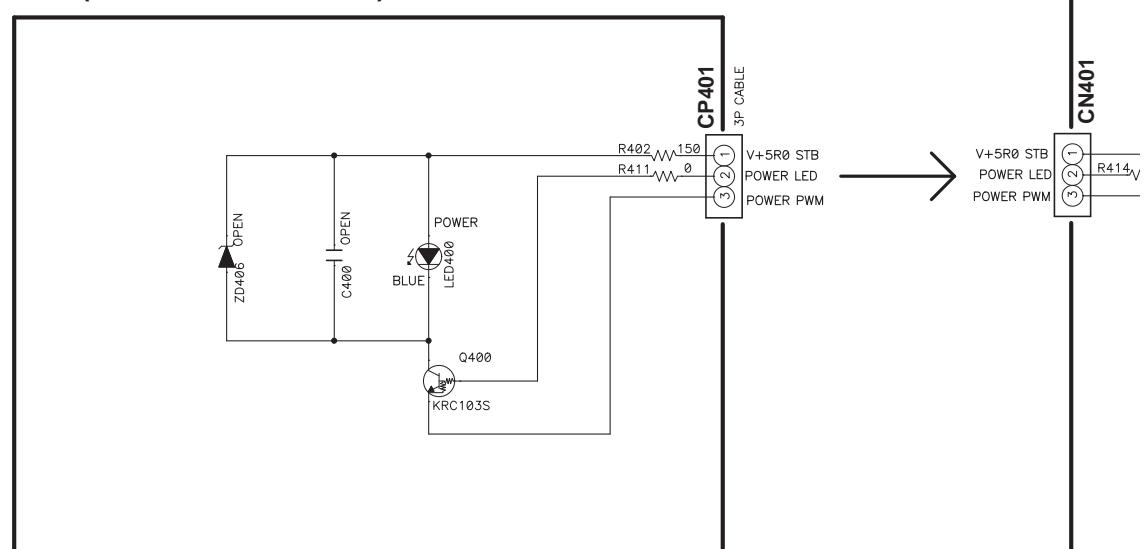


E F G H

E LED ASSY
(N-50, N-50-K/-S: 7028071383010-IL)
(N-30, N-30-K/-S: 7028071383020-IL)

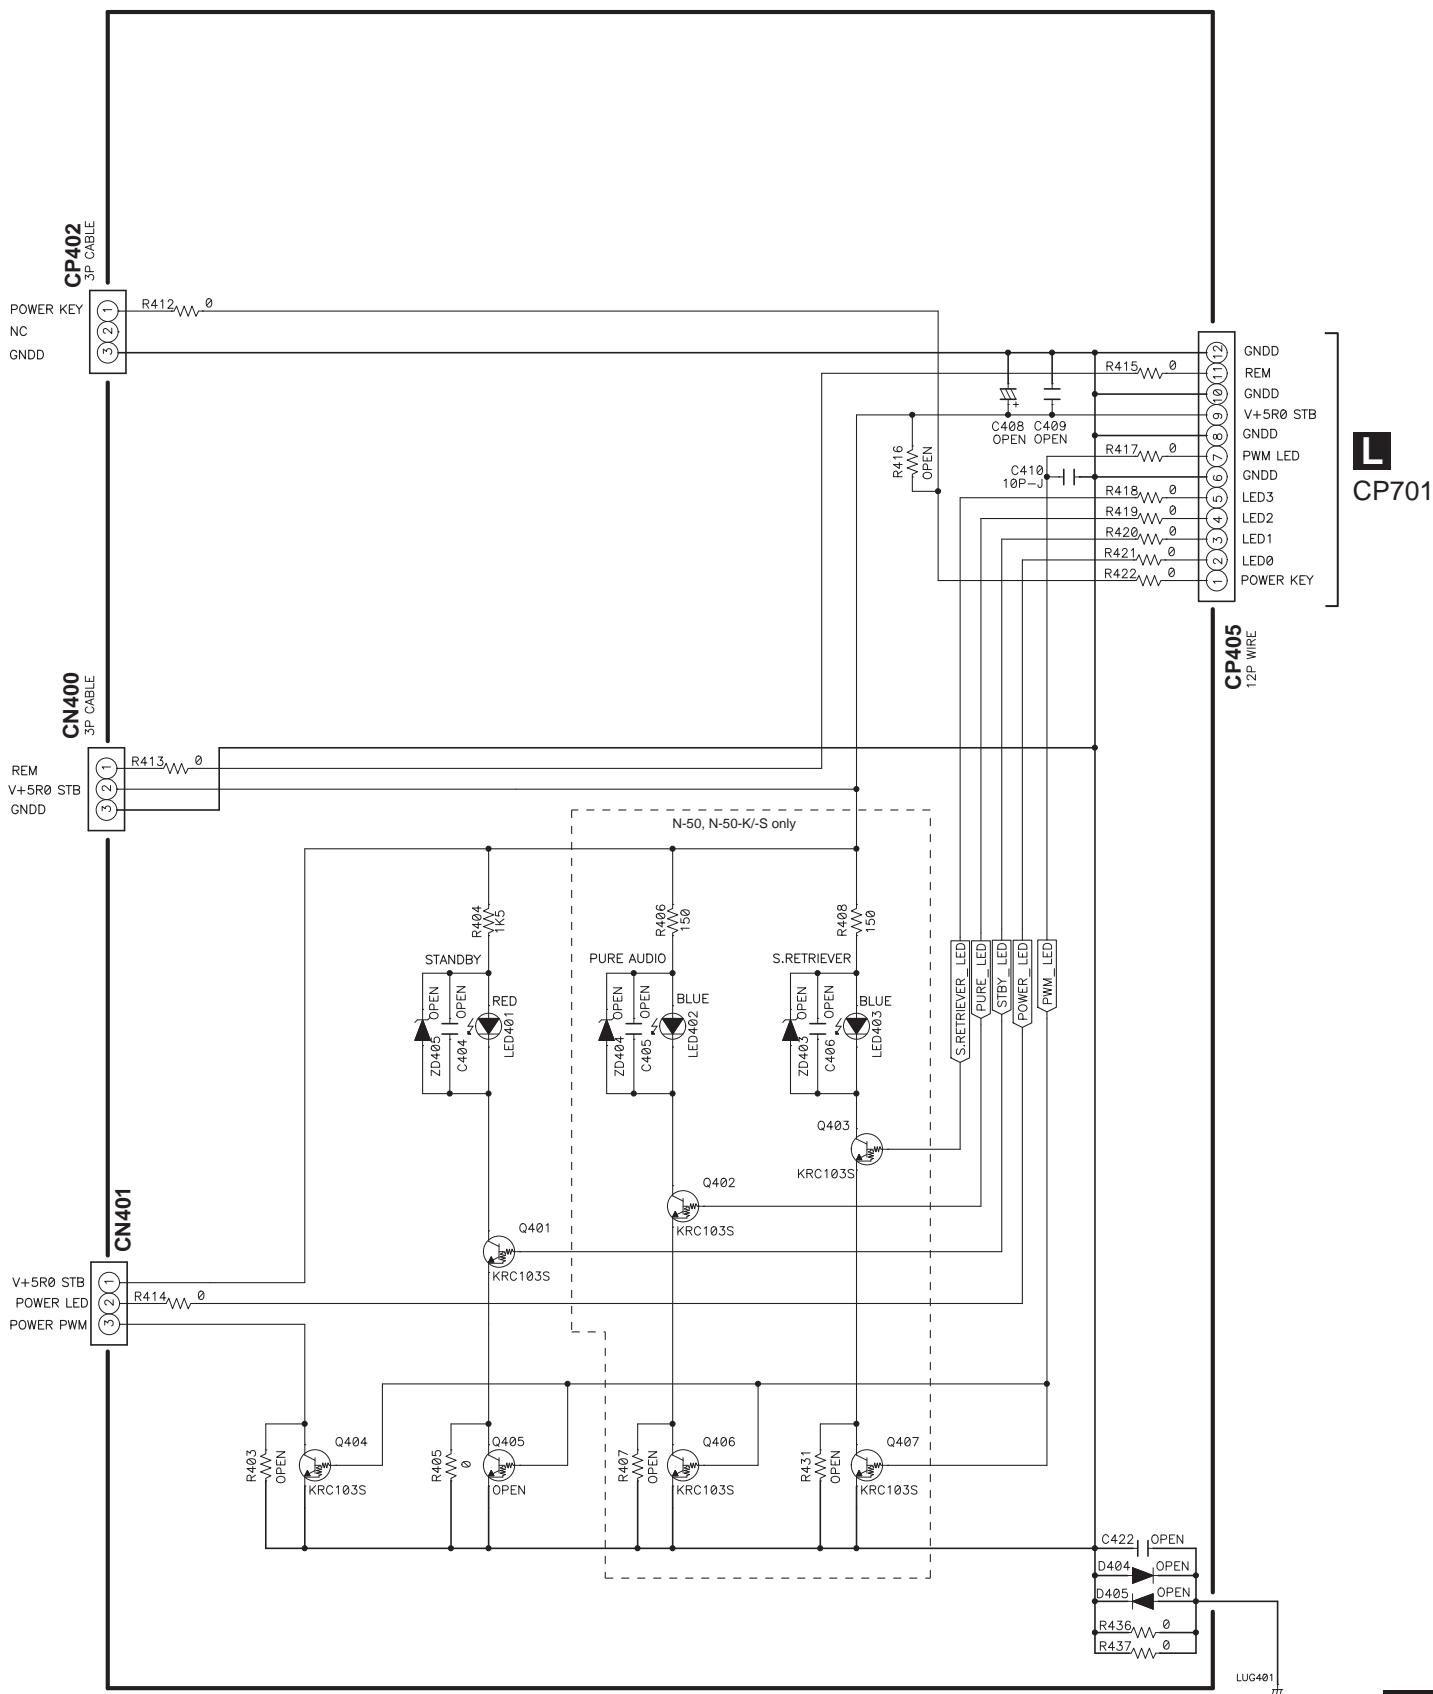


1 2 3 4
10.10 USB ASSY

L
CP703

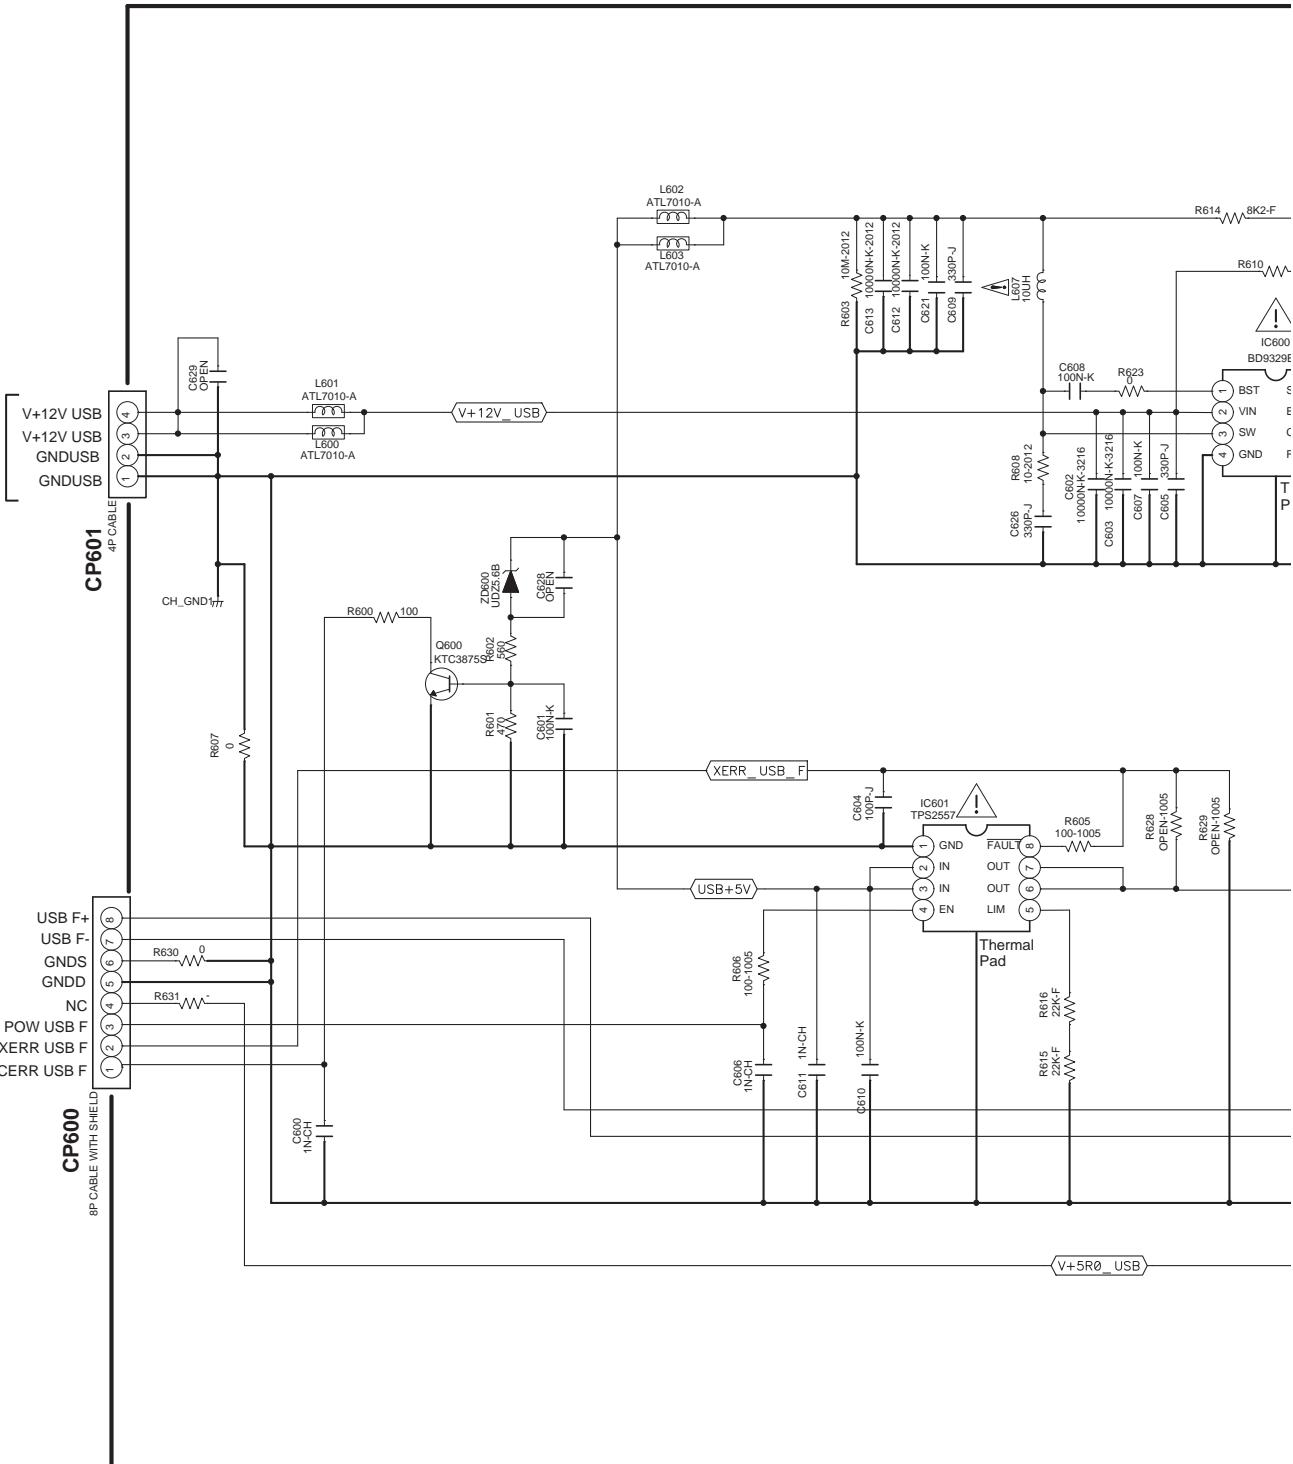


I USB ASSY (7028071371010-IL)

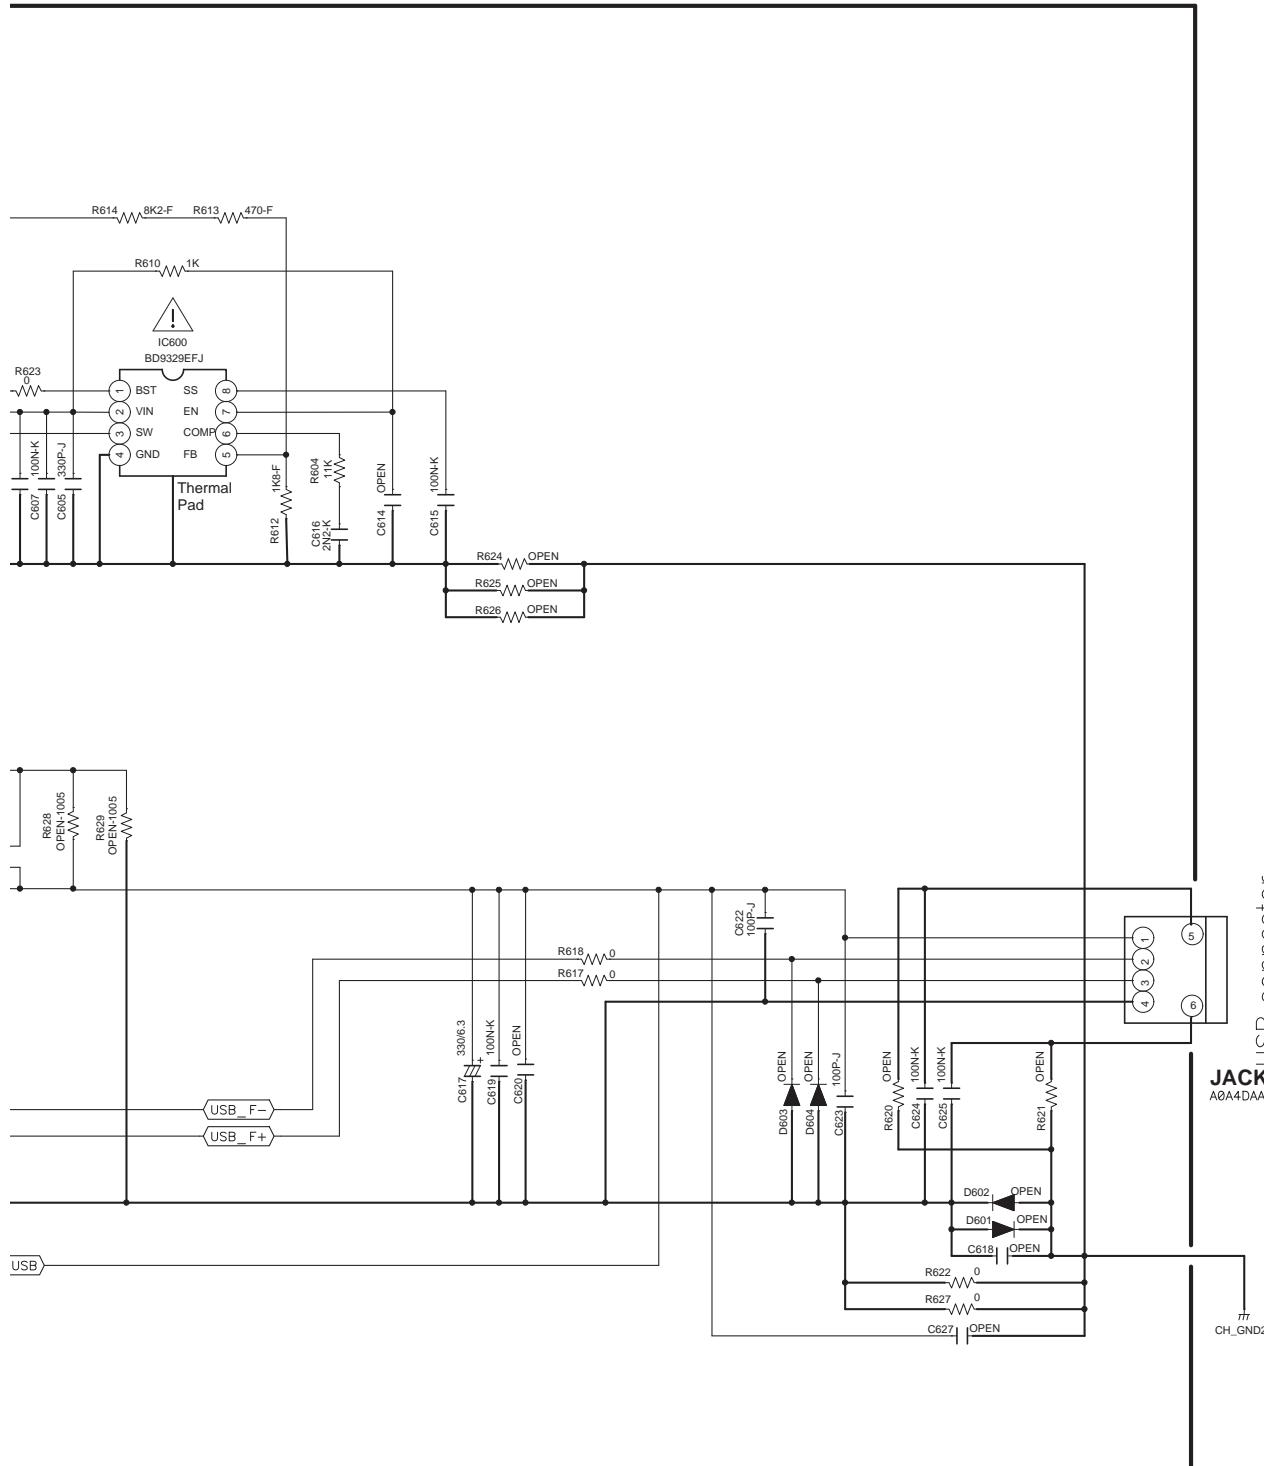

● The mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

10.11 STBY ASSY

A

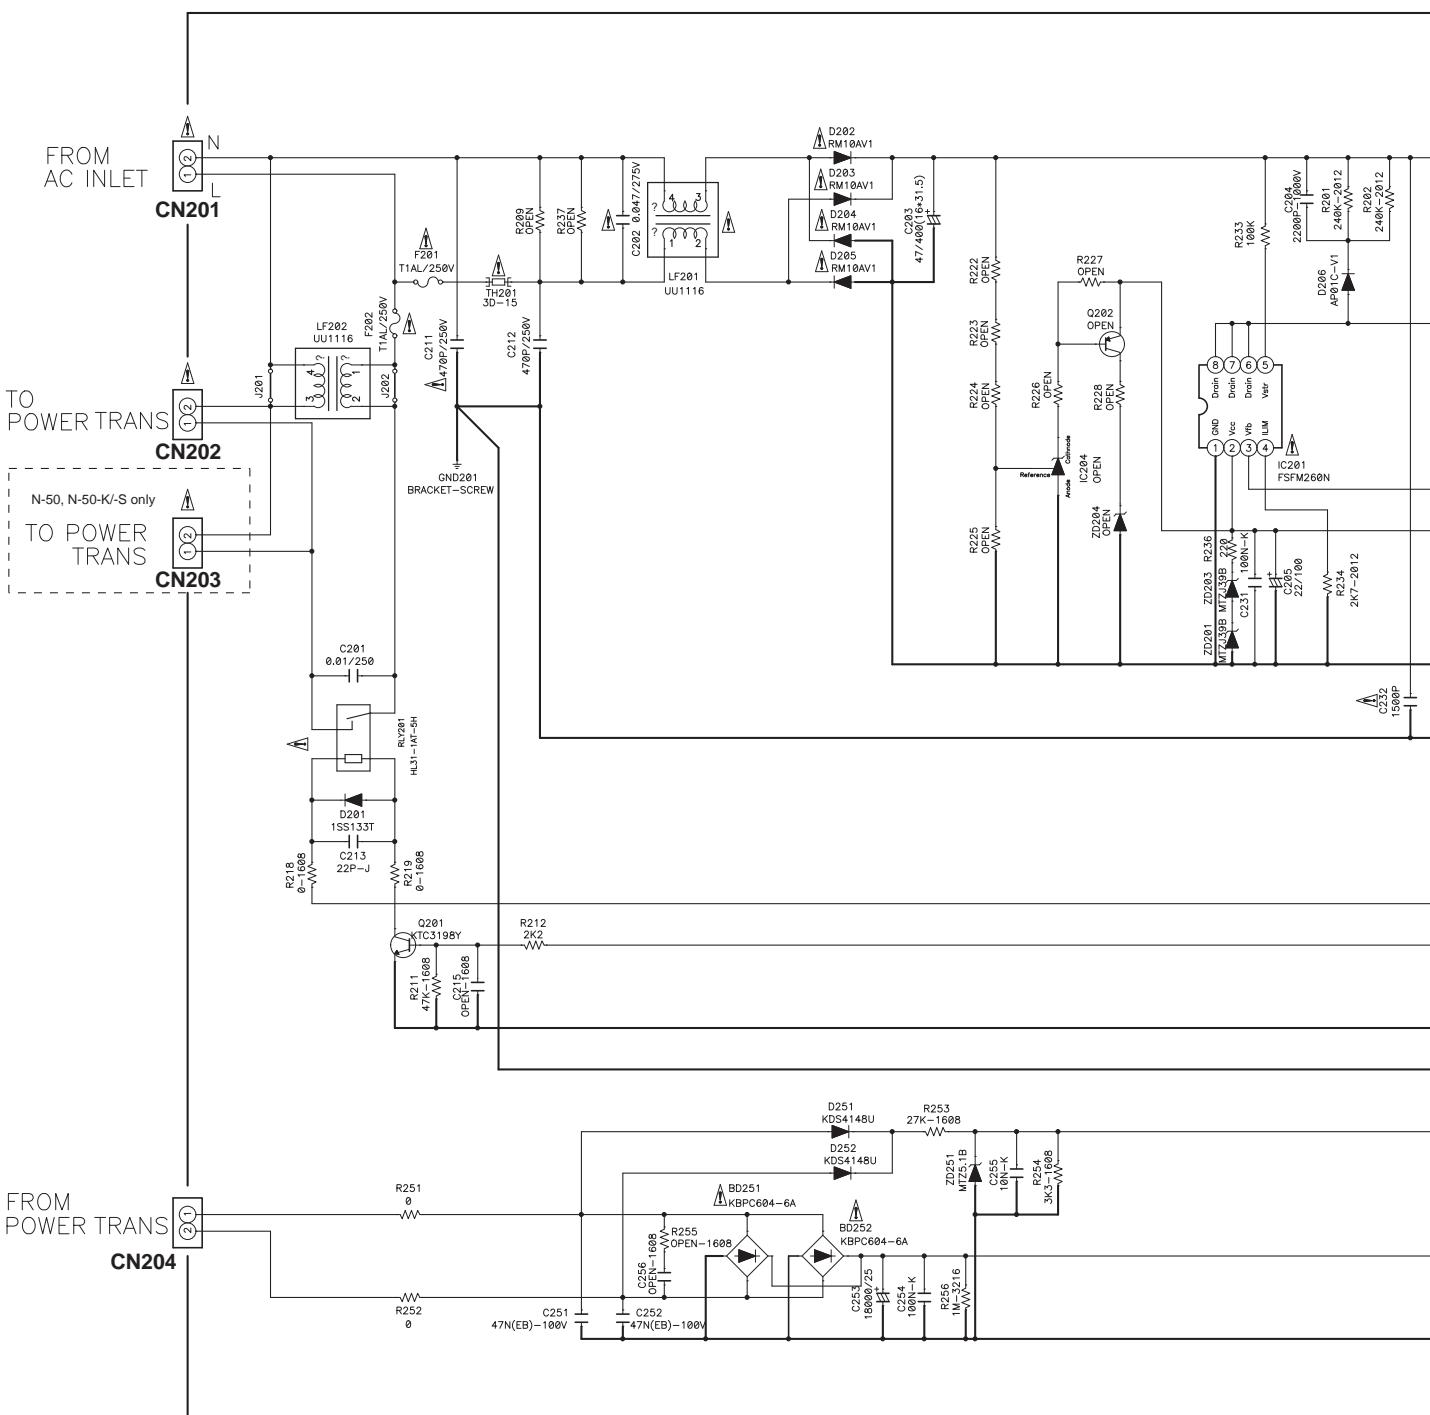

● The mark found on some component
Therefore, when replacing, be sure to use


J

64

N-50

J STBY ASSY

(N-50 : 7028071382010-IL)
 (N-50-K-S : 7028071382020-IL)
 (N-30 : 7028071382030-IL)
 (N-30-K-S : 7028071382040-IL)

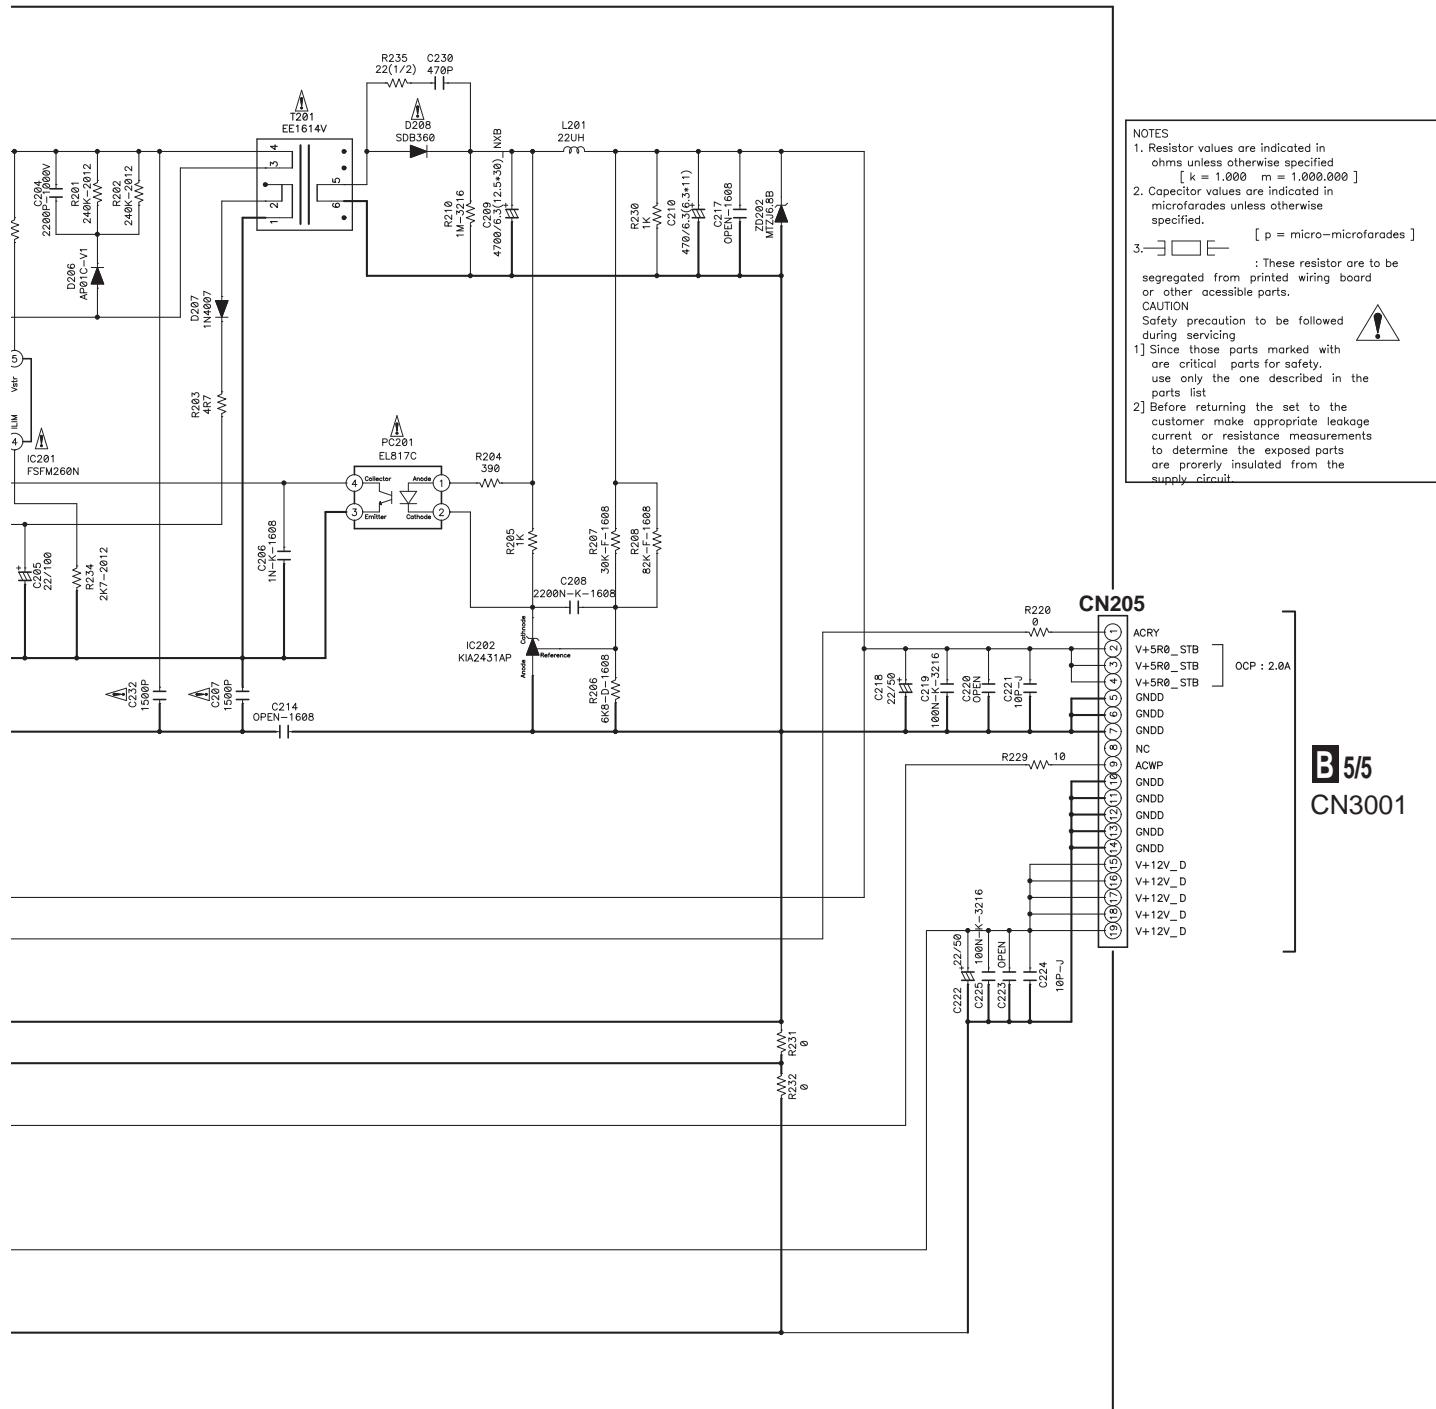


Some component parts indicate the importance of the safety factor of the part. Acting, be sure to use parts of identical designation.


INDICATES SAFETY CRITICAL COMPONENTS.
 TO REDUCE THE RISK OF ELECTRIC SHOCK, LEAKAGE CURRENT OR RESISTANCE MEASUREMENTS SHALL BE CARRIED OUT (EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT) BEFORE THE APPLIANCE RETURNED TO THE CUSTOMER.

1 2 3 4
10.12 CNT A ASSY AND CNT B ASSY

A K CNT A ASSY
(7028071393010-IL)

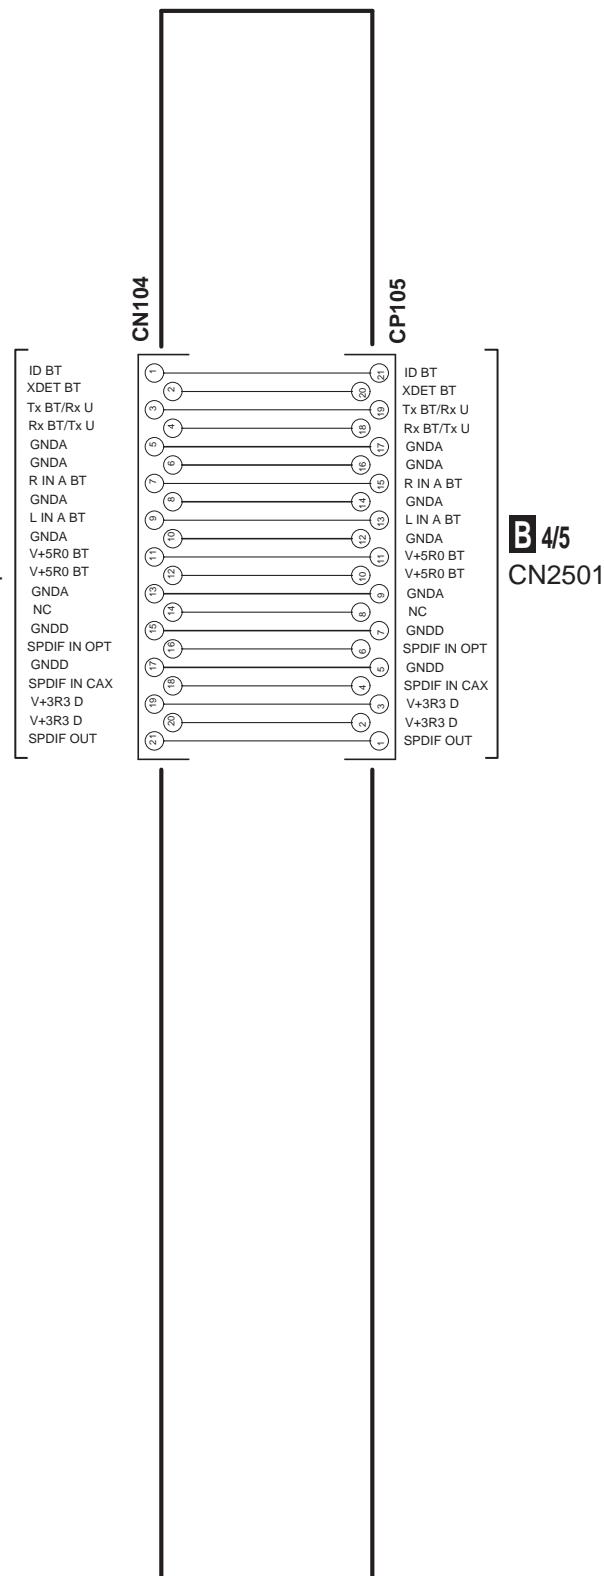


B L CNT B ASSY
(7028071388010-IL)

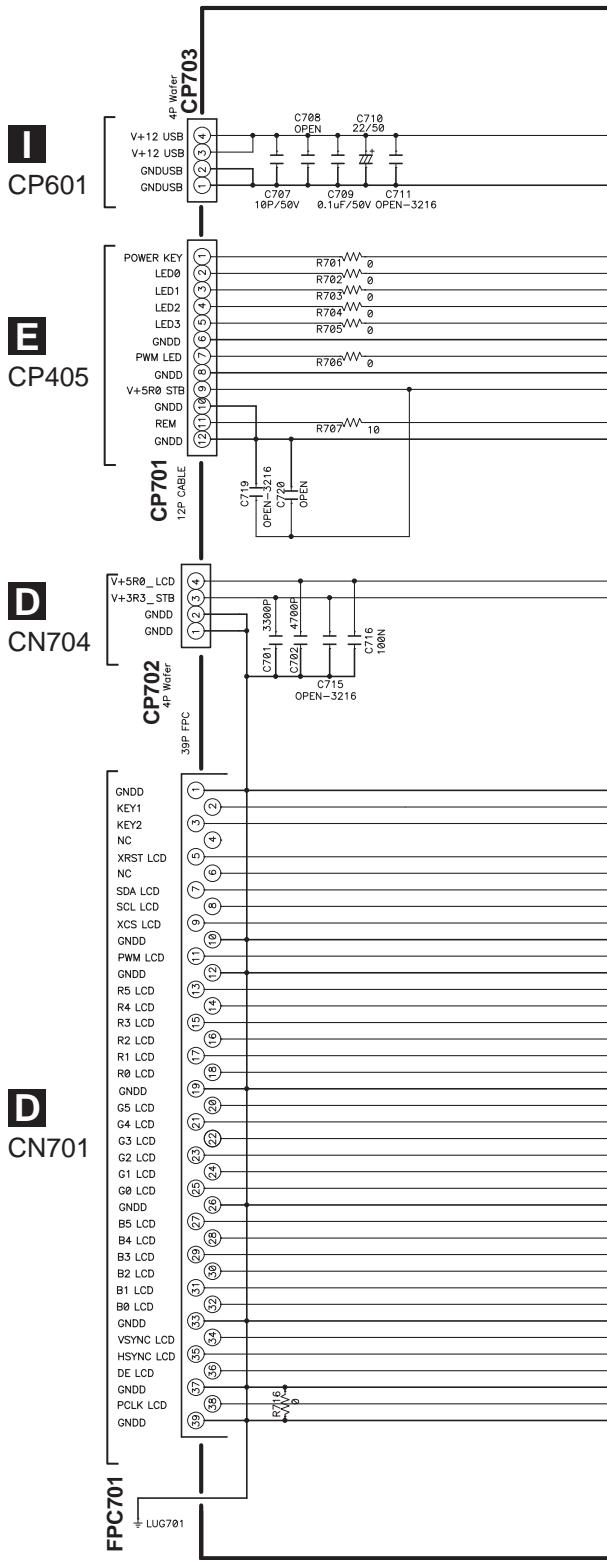

K L

SY
88010-IL)

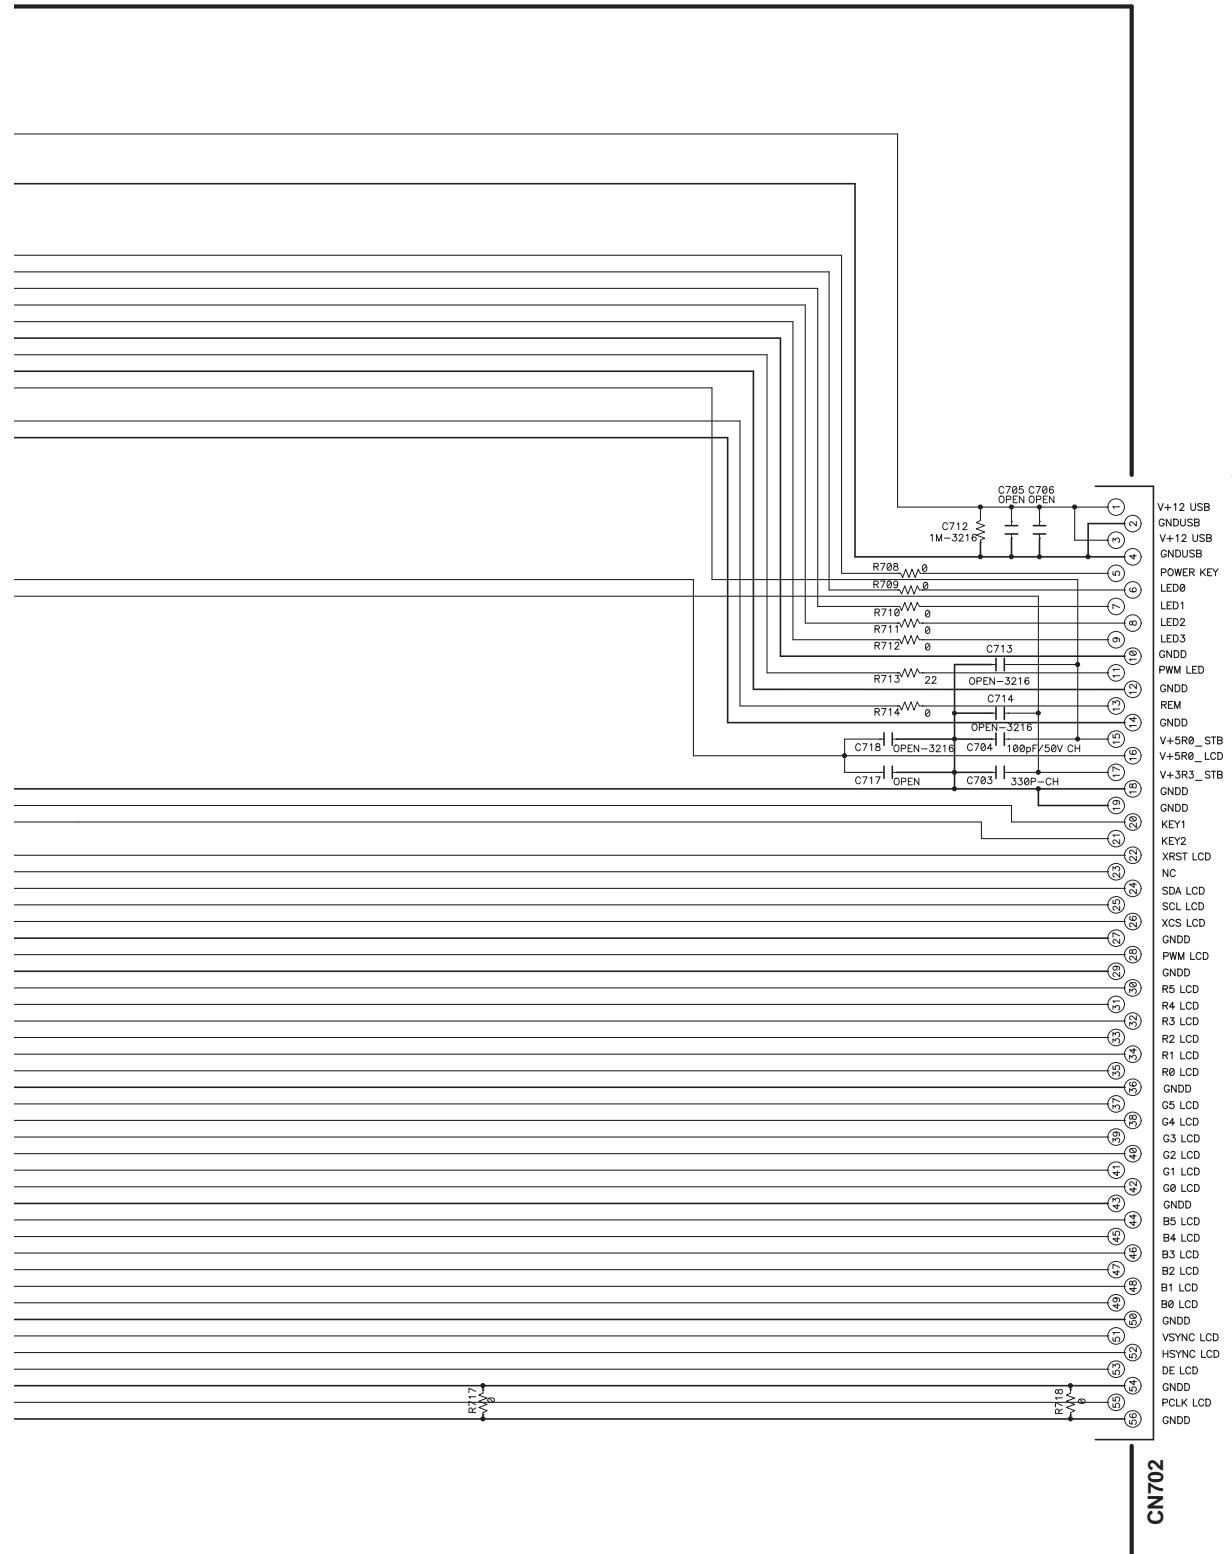

B 1/5
CN1001

A

B

C

D

E

F

L

67

N-50


10.13 GUIDE 1, GUIDE 2(N-50, N-50-K/S ONLY), GUIDE 3 AND GUIDE 4 ASSYS

A

M GUIDE 1 ASSY
(7028071389010-IL)



N GUIDE 2 ASSY
(N-50, N-50-K/S: 702807138A010-IL)



B

C

D


E

F

O GUIDE 3 ASSY
(7028071387010-IL)



P GUIDE 4 ASSY
(702807138B010-IL)



M N O P

68

2

N-50

3

M N O P

4

5

6

7

8

A

B

C

D

E

F

N-50

69

5

6

7


8

11. PCB CONNECTION DIAGRAM

11.1 JACK ASSY

A SIDE A


A JACK ASSY

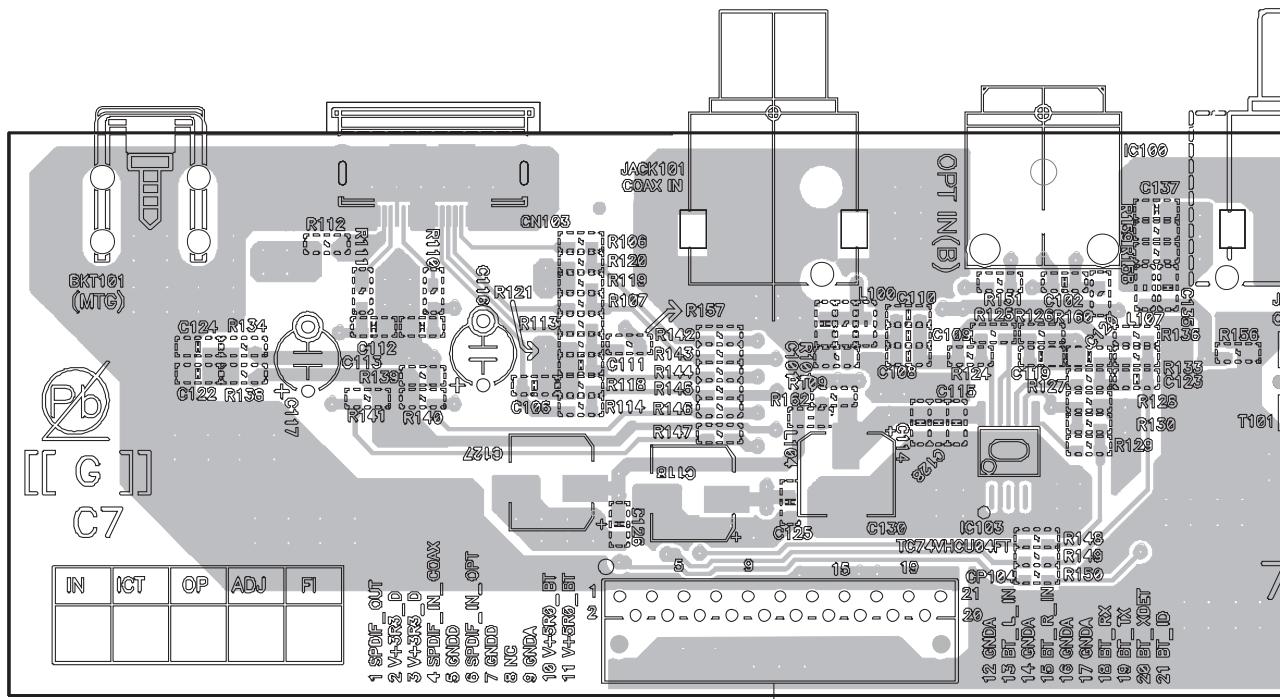

K CN104


B SIDE B

CP104

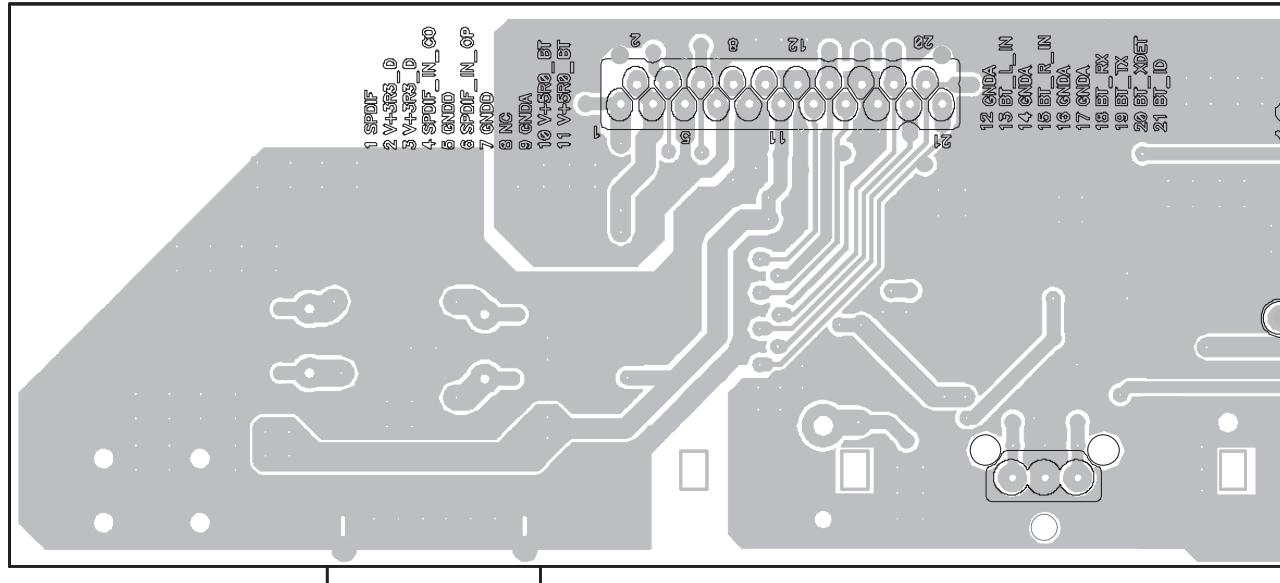

A


N-50

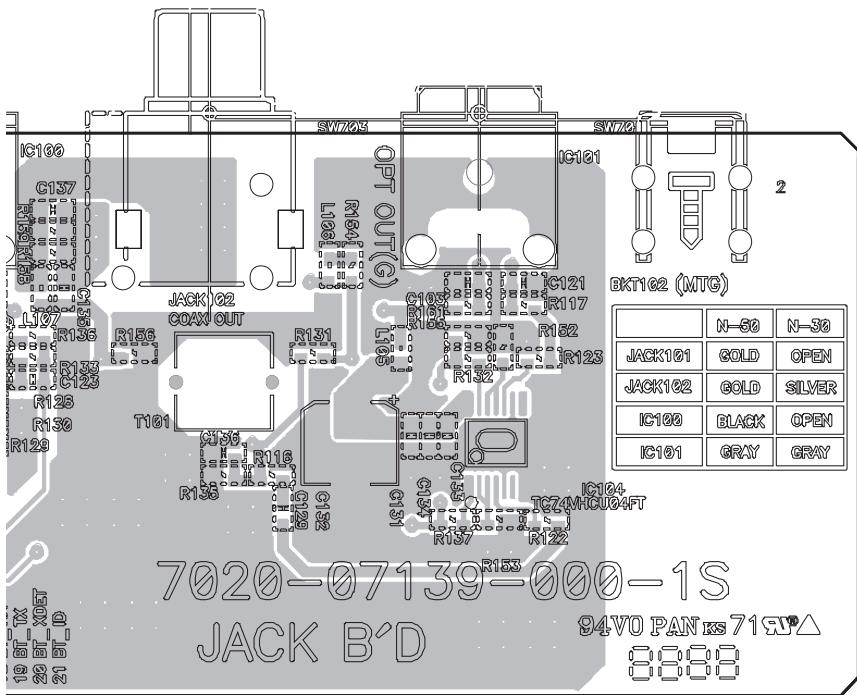SIDE A

A

SIDE B

D

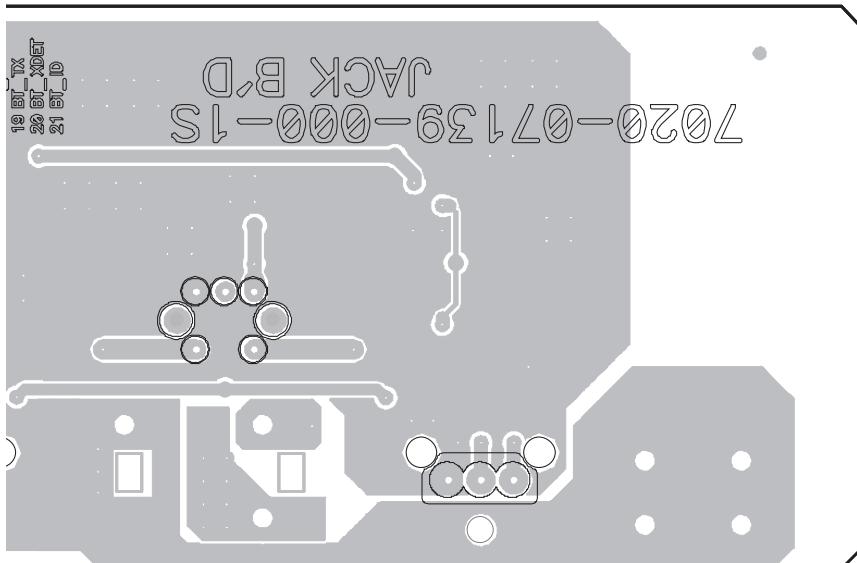


E

NOTE FOR PCB DIAGRAMS :

1. The parts mounted on this PCB include all necessary parts for several destinations. For further information for respective destinations, be sure to check with the schematic diagram.

2. View point of PCB diagrams.

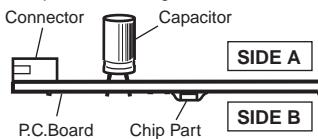

F


A

71

1 2 3 4
11.2 D-MAIN ASSY


SIDE A


B D-MAIN ASSY

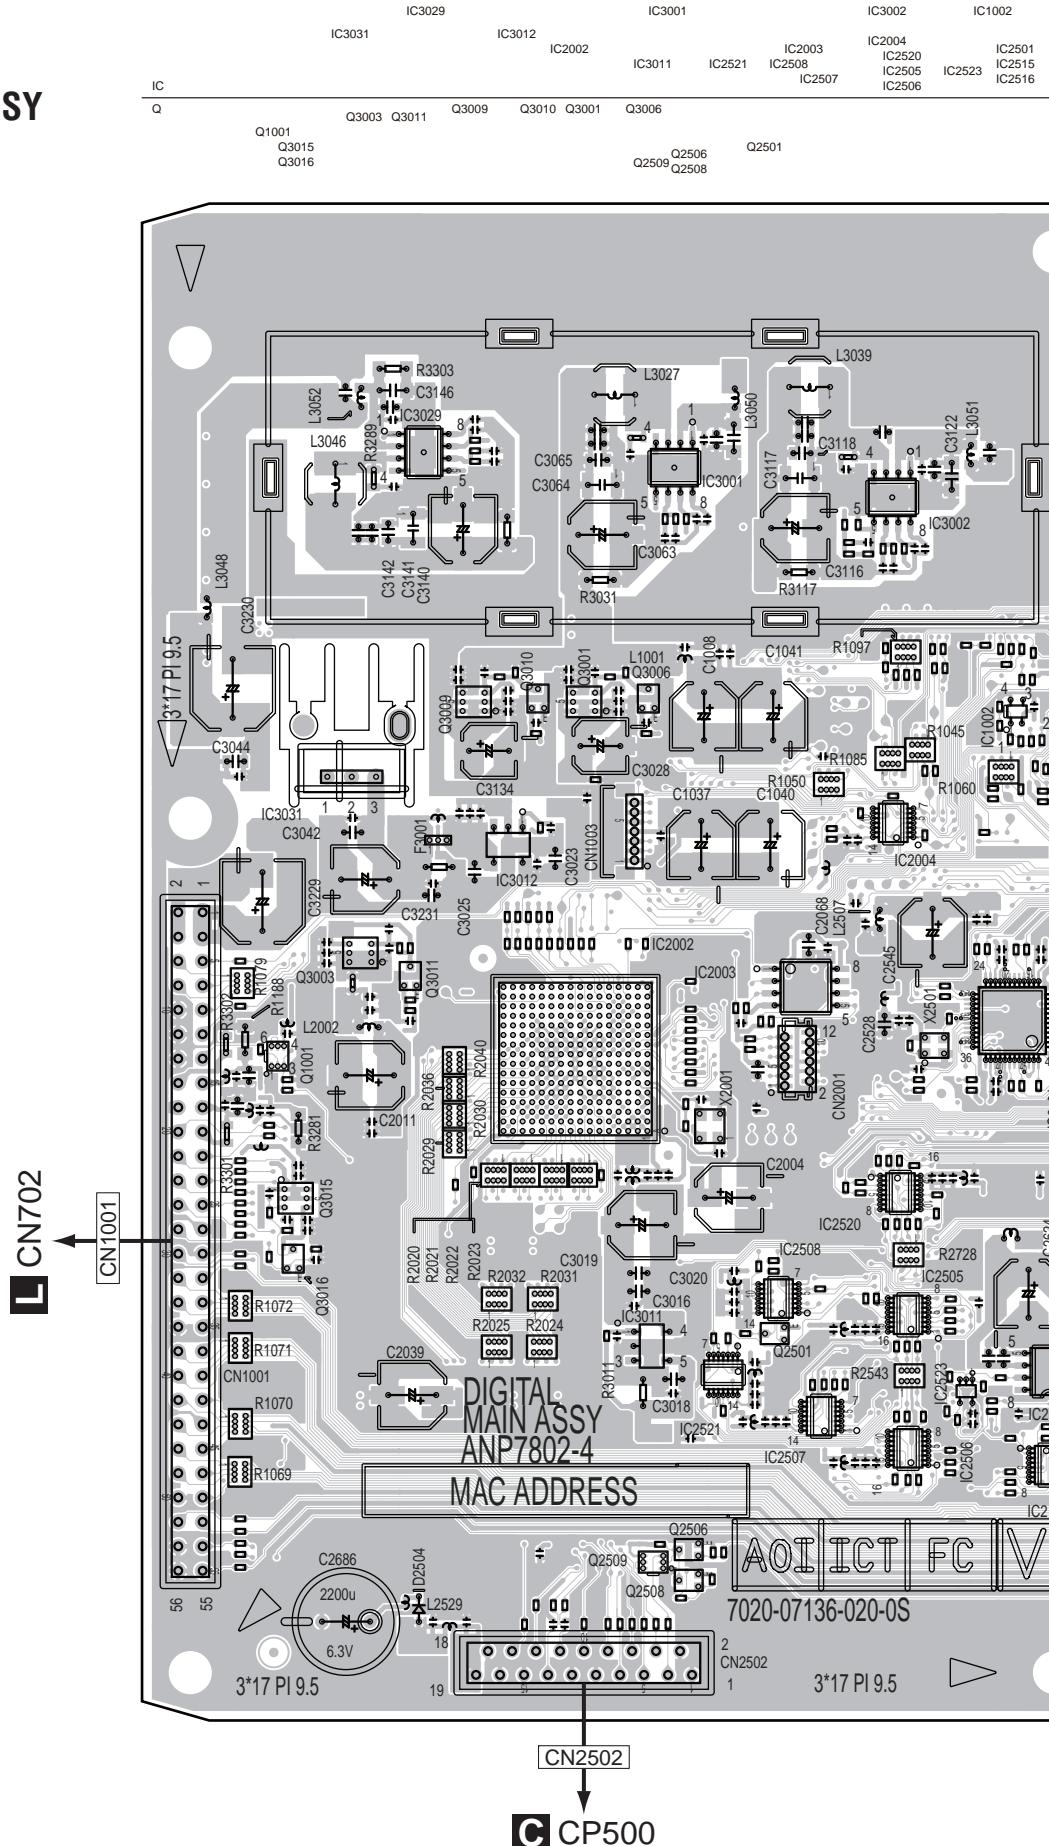


C3002 IC1002
 C2004 IC2520 IC2501 IC2513 IC2512 IC2503
 IC2505 IC2523 IC2515 IC2519 IC1501 IC1502
 IC2506 IC2516 IC2516 IC2508 IC1504 IC1505 IC1503 IC1506
 Q3012 Q2505 Q2511 Q2510
 C3122 L3047 R3161 C3152 R3029 R3072 R3160 L3028 L3049 R3299
 IC3002 C3105 L3047 IC2501 IC3001 IC1508 IC2509 IC1504 IC1505 IC1501 IC1503 IC1506
 Q3012 R3039 C2561 R2631 R2630 X2503 L2510 C2572 IC2503
 IC2524 R2632 R2633 IC2611 IC2519 D2506 D2502 X2504 KN3002
 D3001 C2555 C2524 C2611 IC2513 D2501 D2502 C2588
 IC2004 R1045 IC1002 R1060 IC2501 C2549 L2517 IC2509 IC2519
 C2556 X2501 C1630 C1525 L1504 IC2501 IC1502 KN1001
 C1630 C1525 L1504 IC1501 IC1502 IC1501 IC1501 IC1501 IC1501
 C1517 C1532 C1534 R1532 R1533 R1534 R1533 R1532
 R2728 IC2505 C1524 L1505 X1501 IC1508 C1632 R1564 R1666
 C1524 L1505 X1501 IC1508 C1632 R1564 R1666 IC1504
 IC2506 C1525 L1505 X1501 IC1508 C1632 R1564 R1666 IC1504
 IC2516 IC2515 IC2515 IC2515 IC2515 IC2515 IC2515 IC2515 IC2515 IC2515
 T FC VIT/U DIP
 0-S 9.5

SIDE A

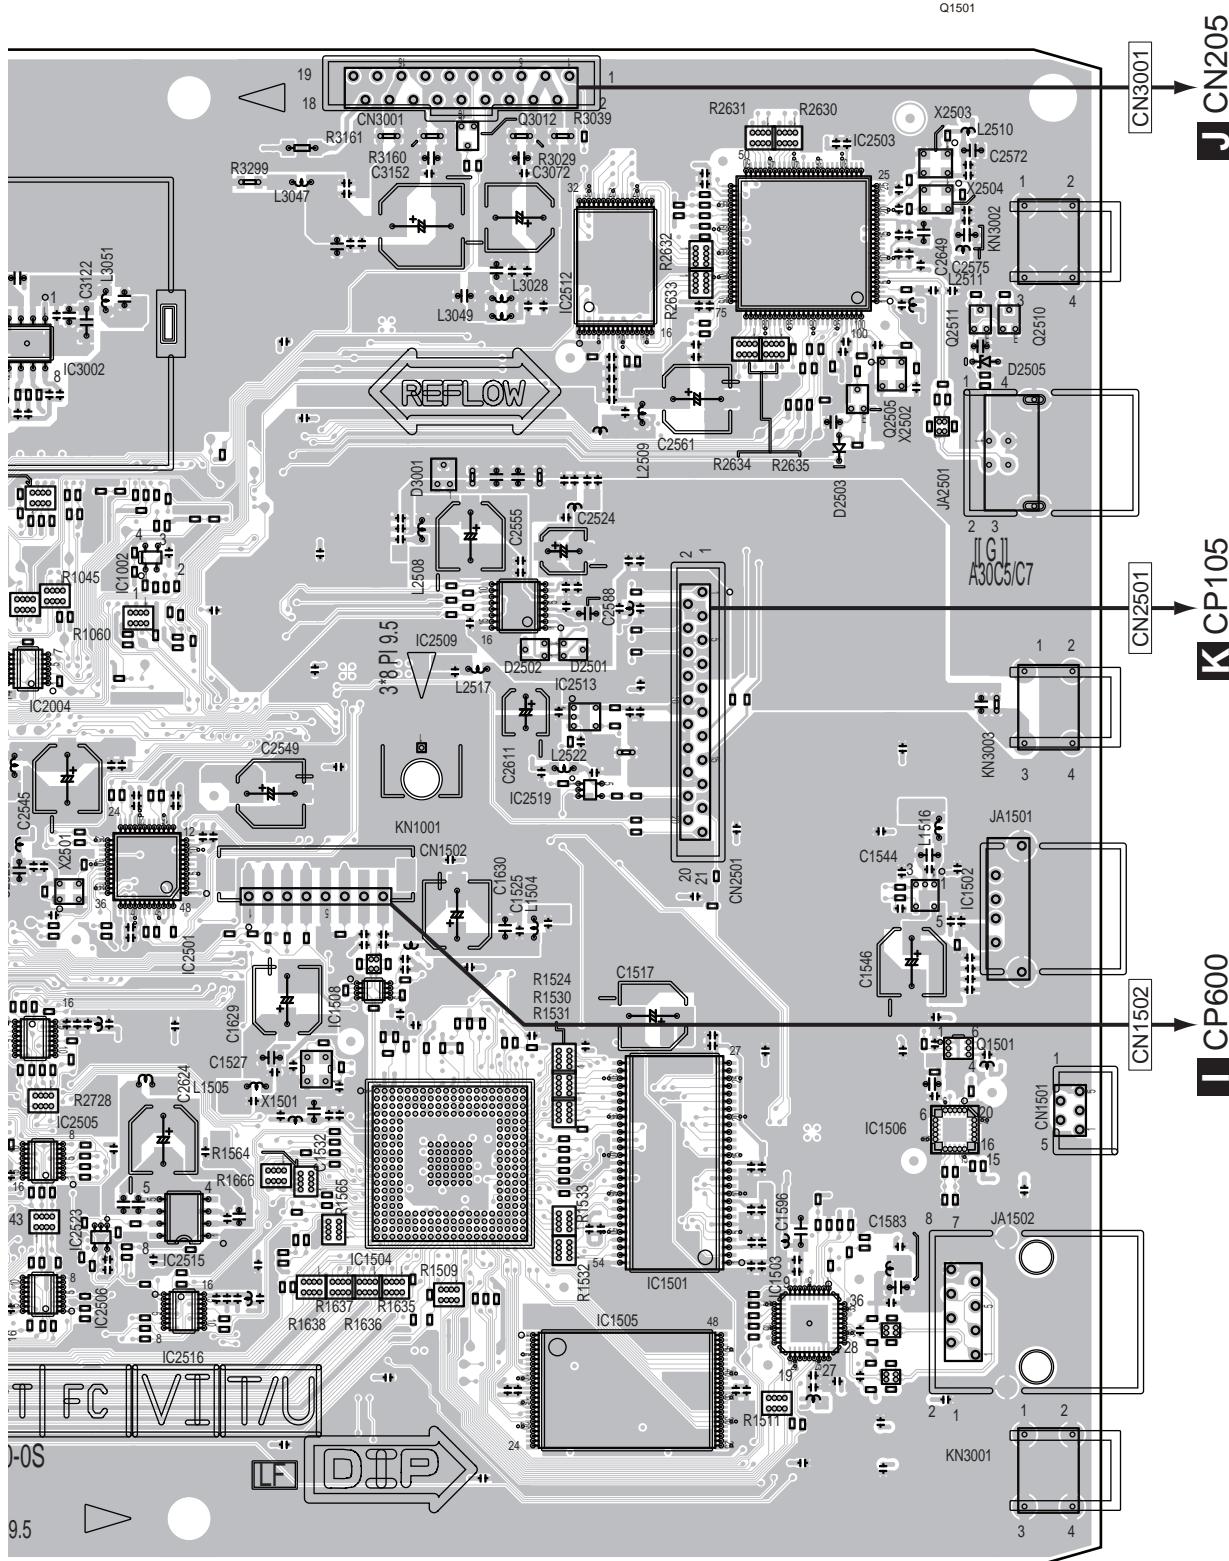

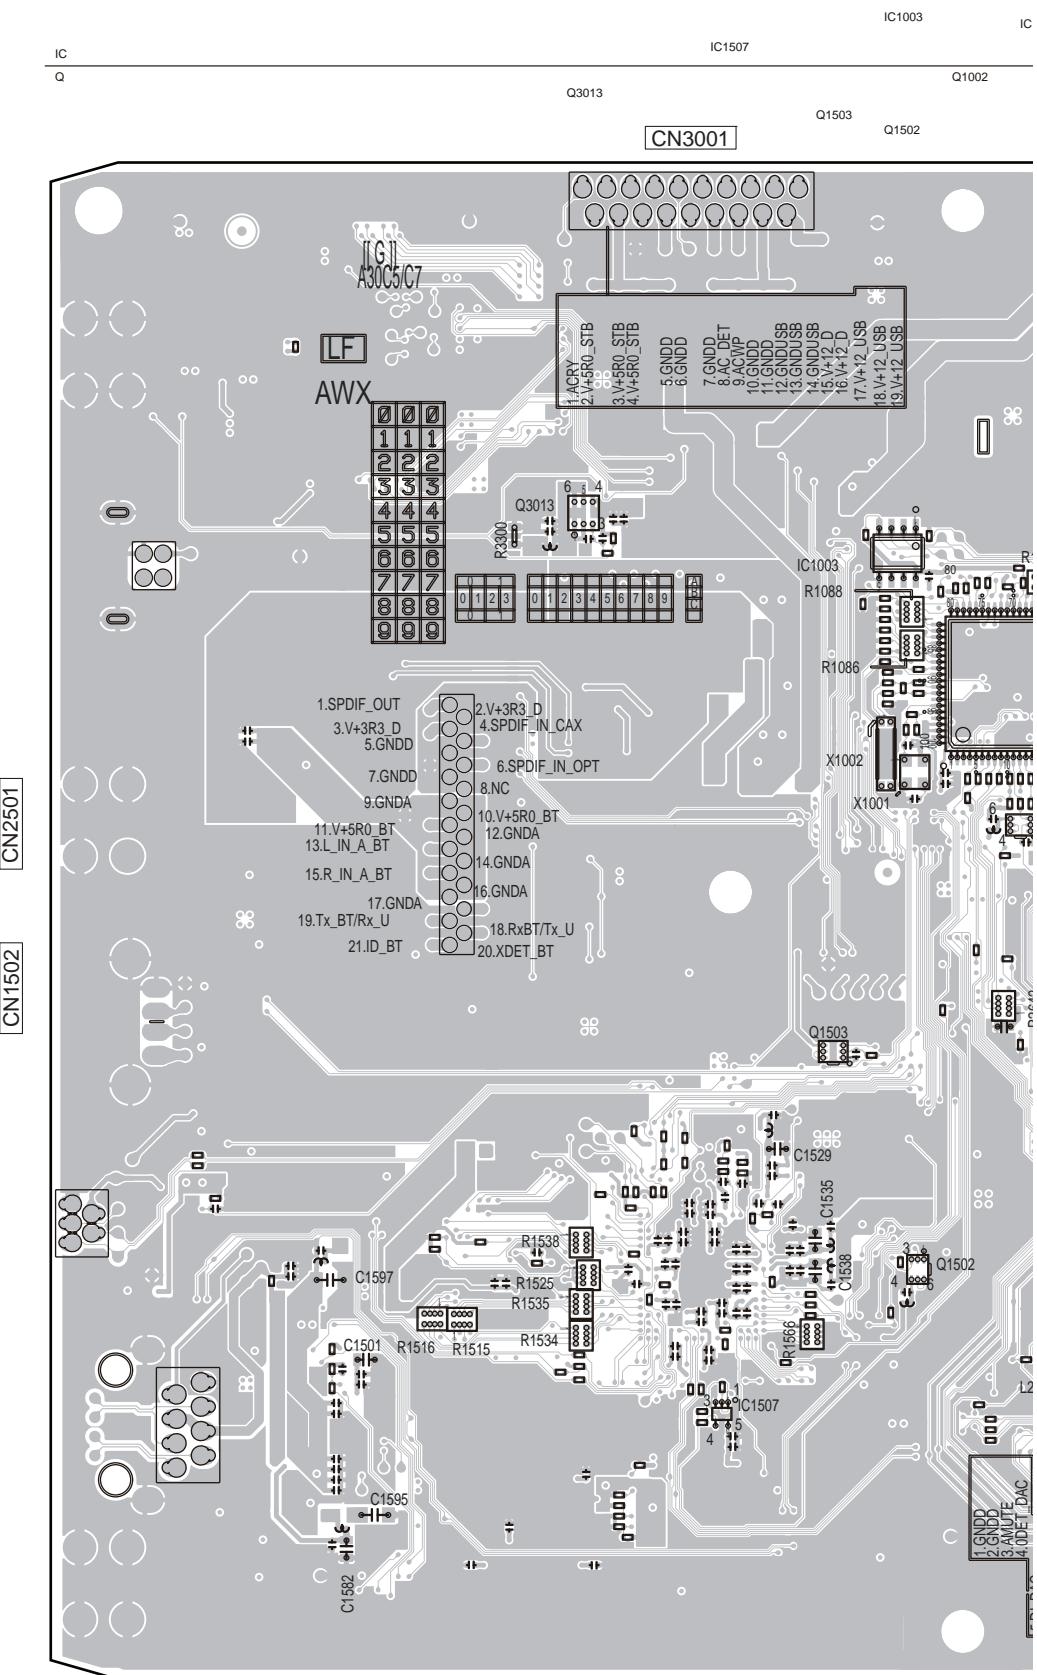SIDE B**B D-MAIN ASSY**

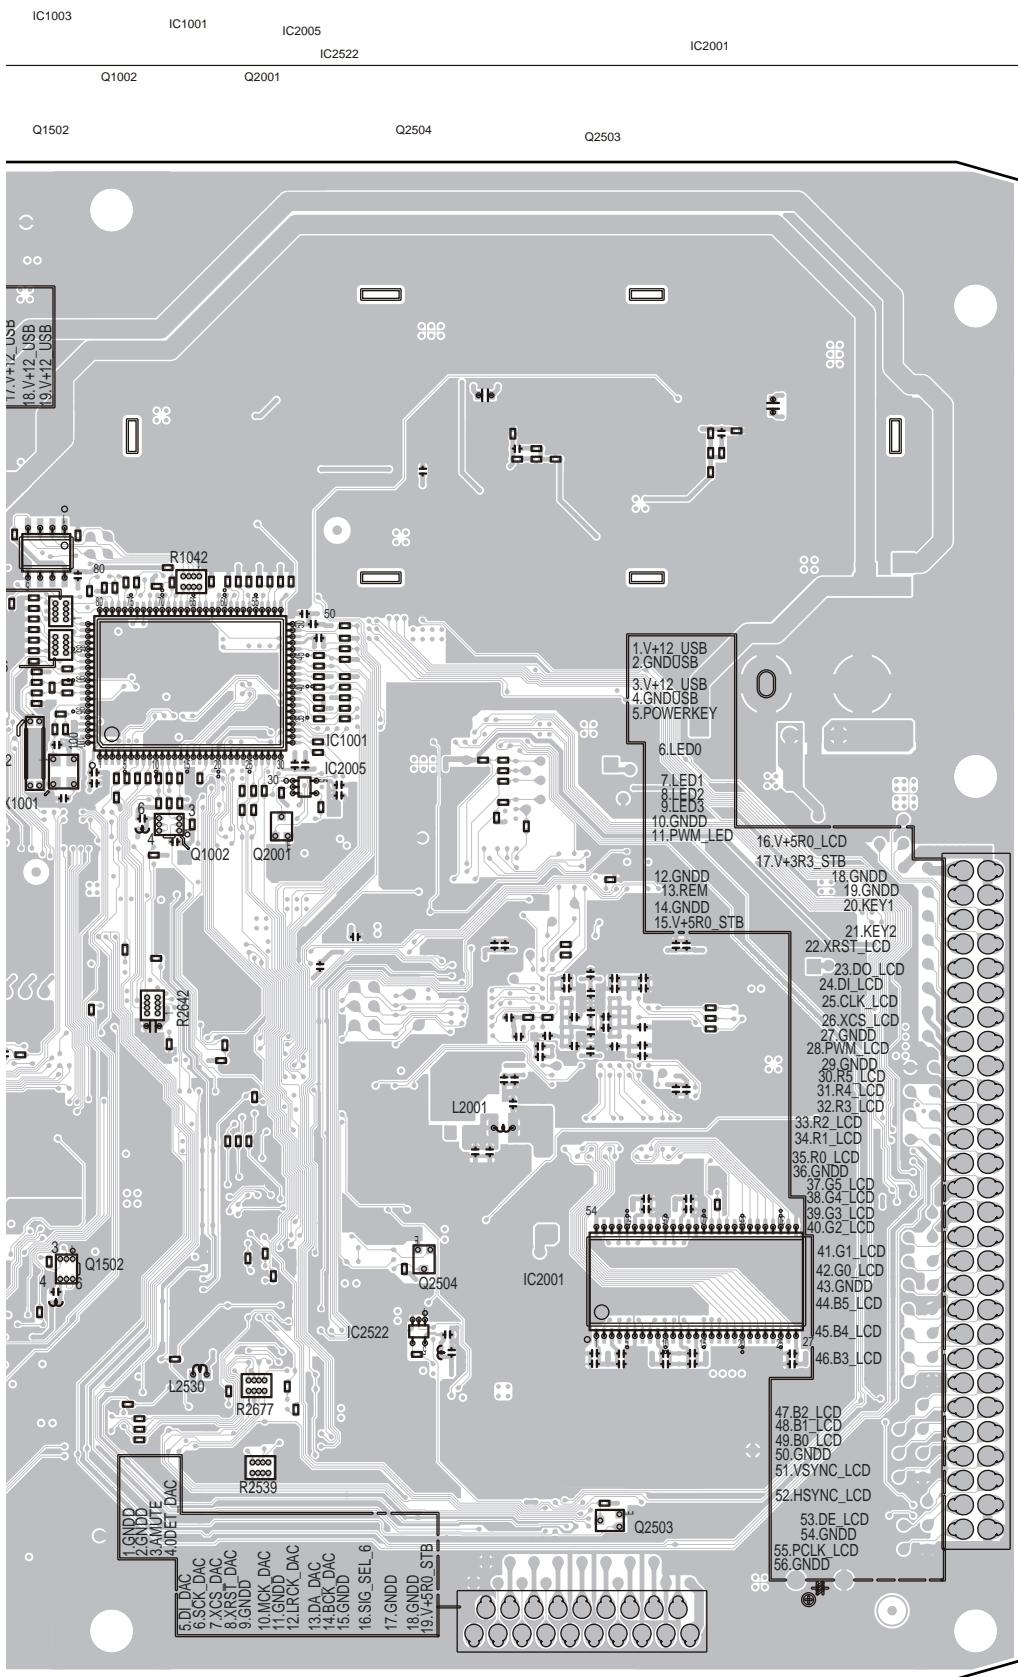

CN2502

N-50


B

75

11.3 DAC ASSY

SIDE A

C DAC ASSY

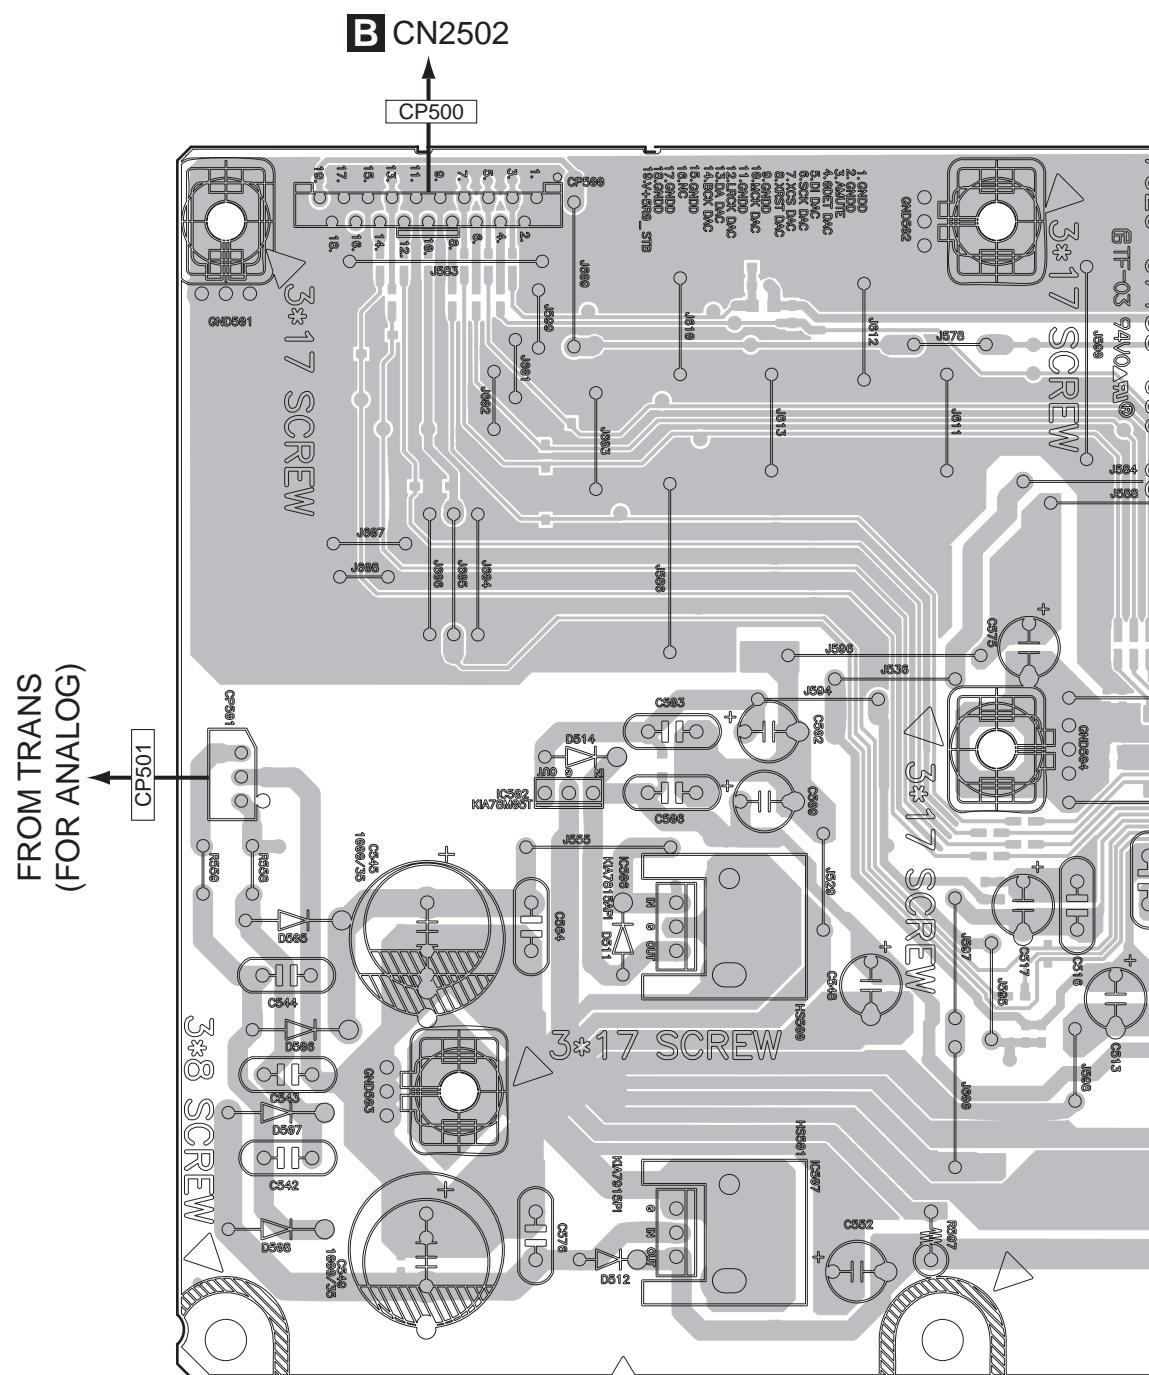


C

76

N-50

SIDE A

A

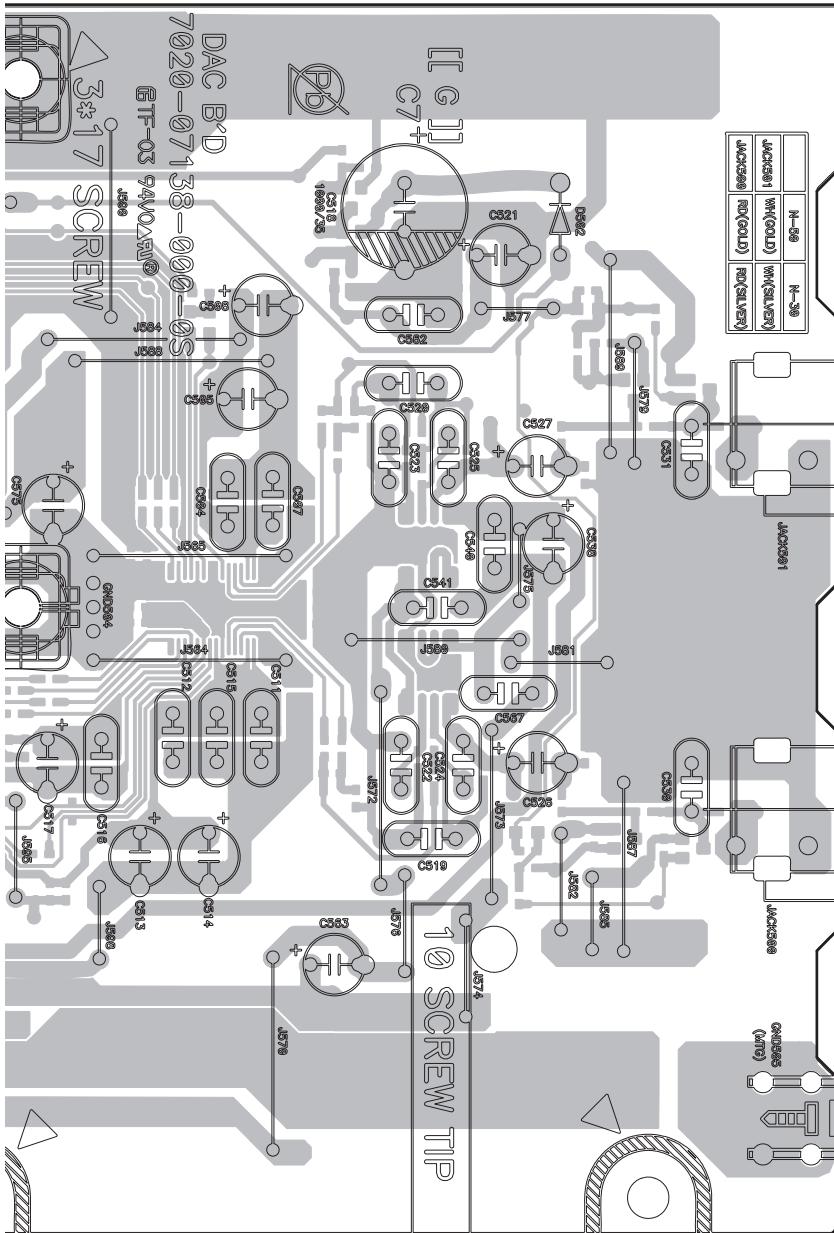

L

ANALOG OUT

R

B

C

D

E

F

C

77


N-50

SIDE B

A

C DAC ASSY

B

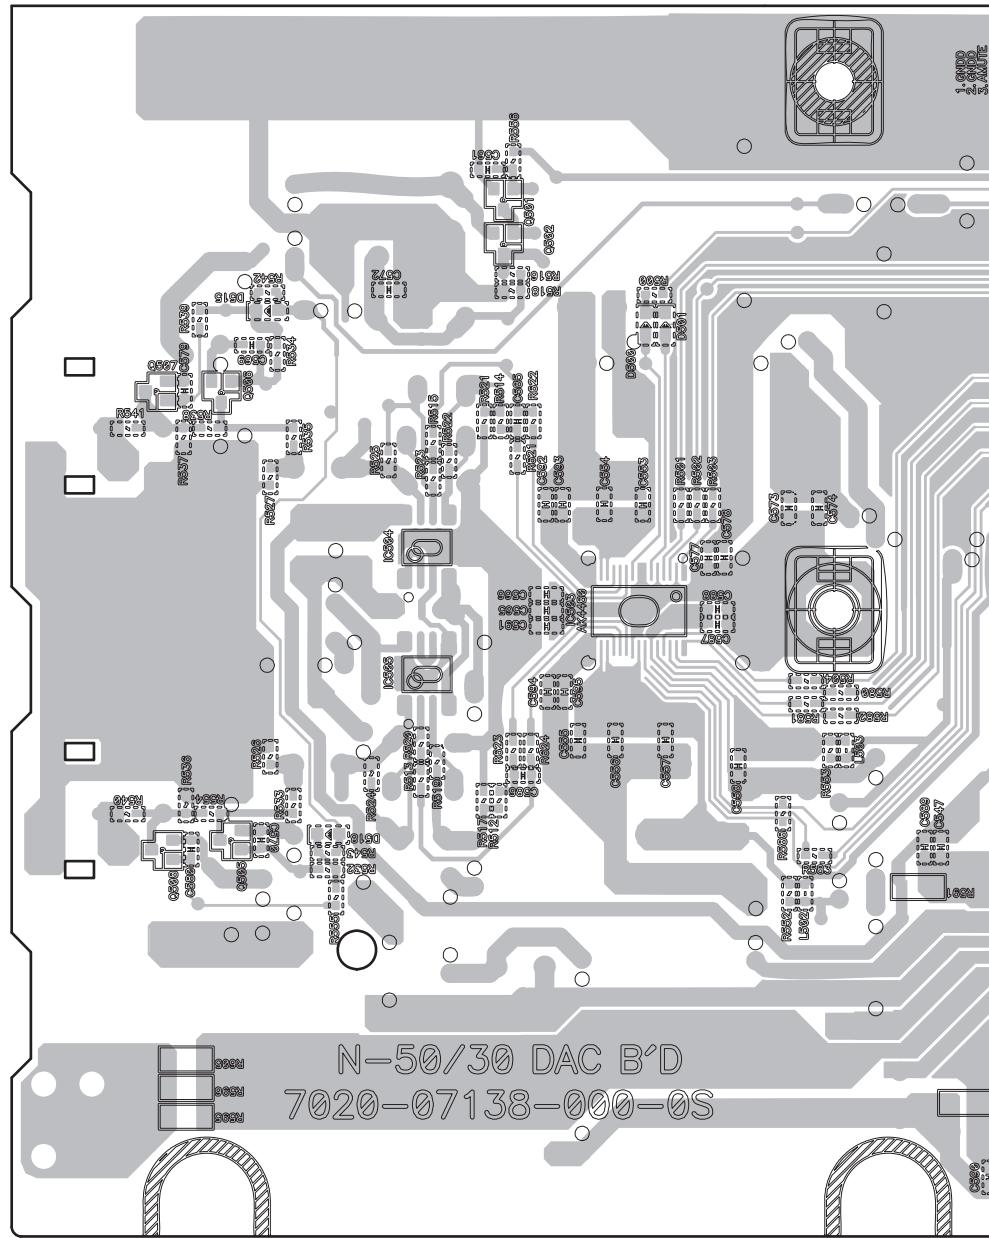

C

D

E

F


C

78

N-50

SIDE B

A

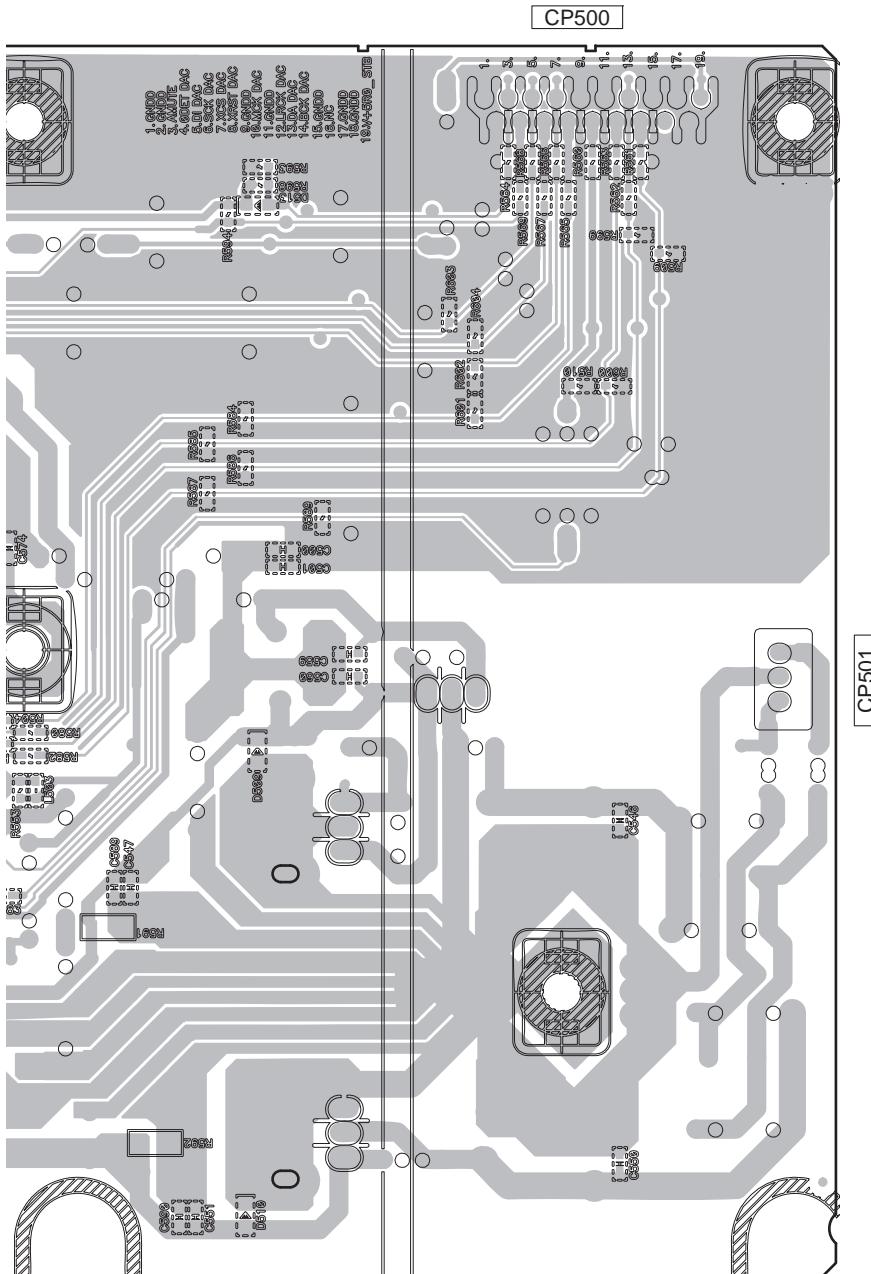

B

C

D

E

F


N-50**C**

79


1 2 3 4
11.4 LCD/KEY ASSY

SIDE A

D LCD/KEY ASSY

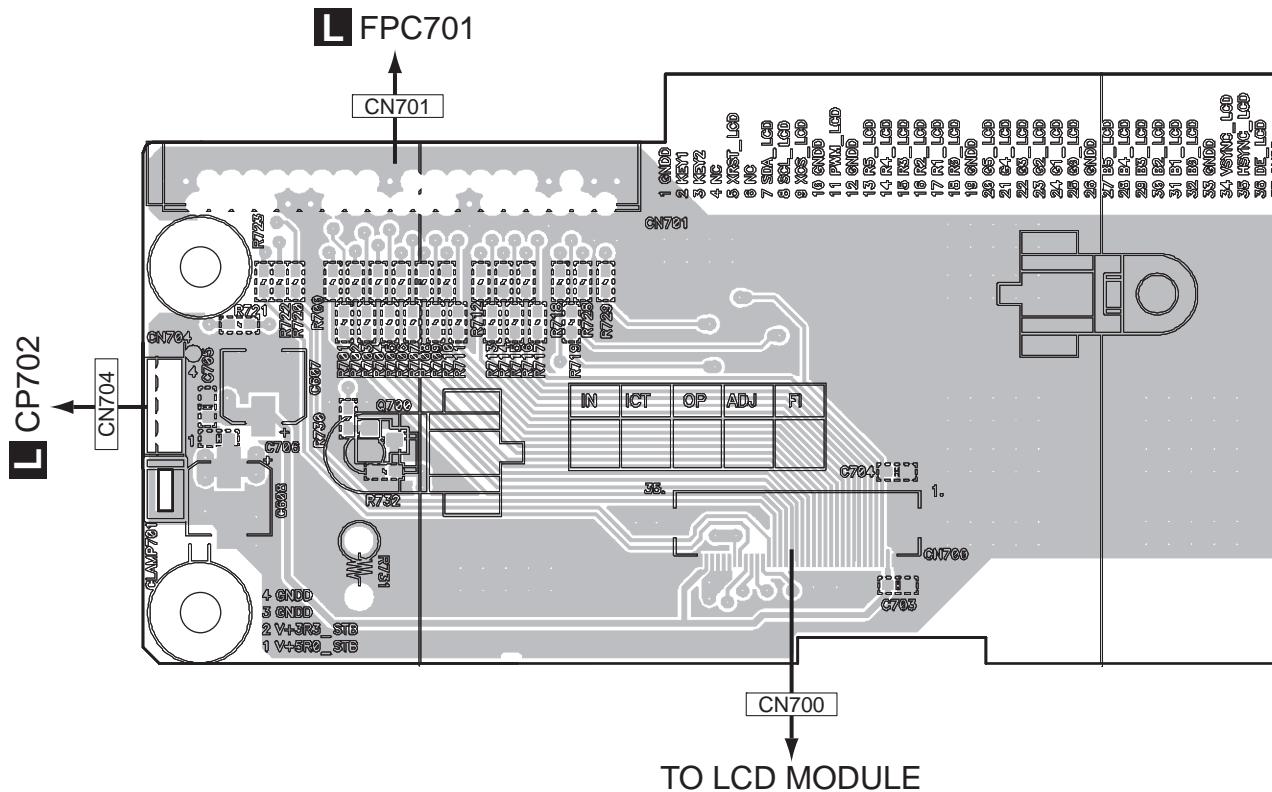

SIDE B

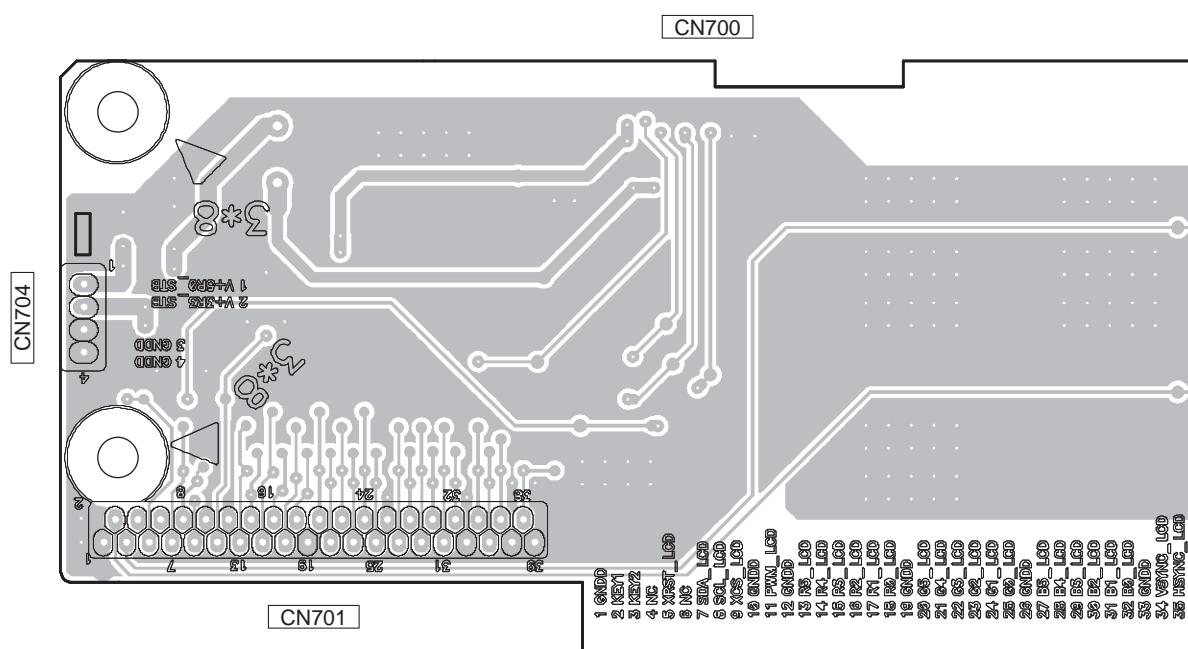


D

80


N-50

SIDE A

A

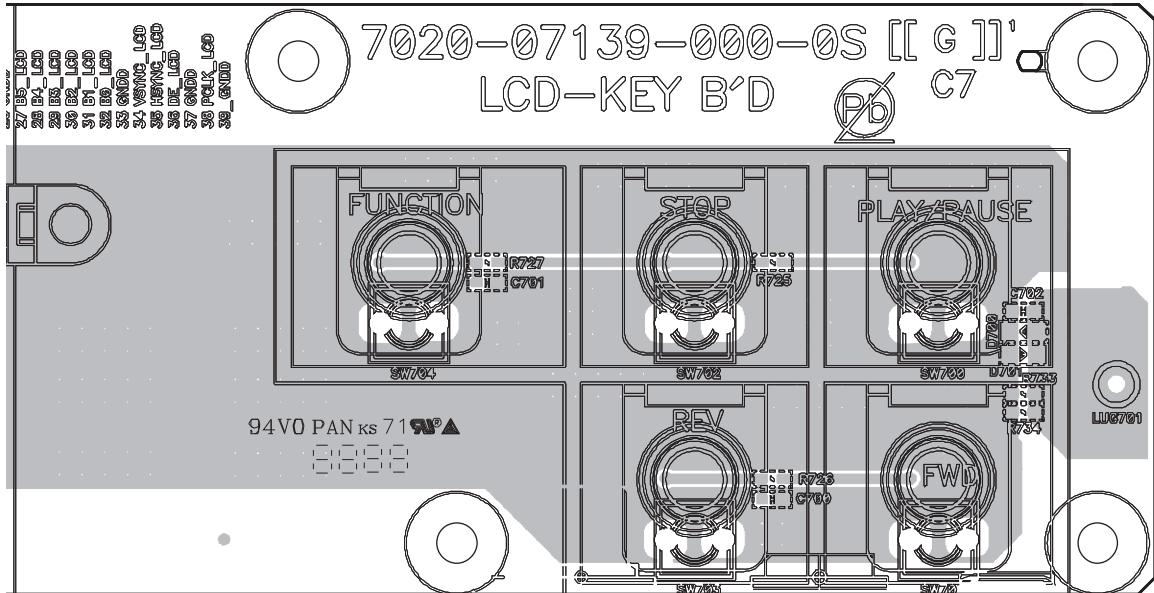**SIDE B**

D

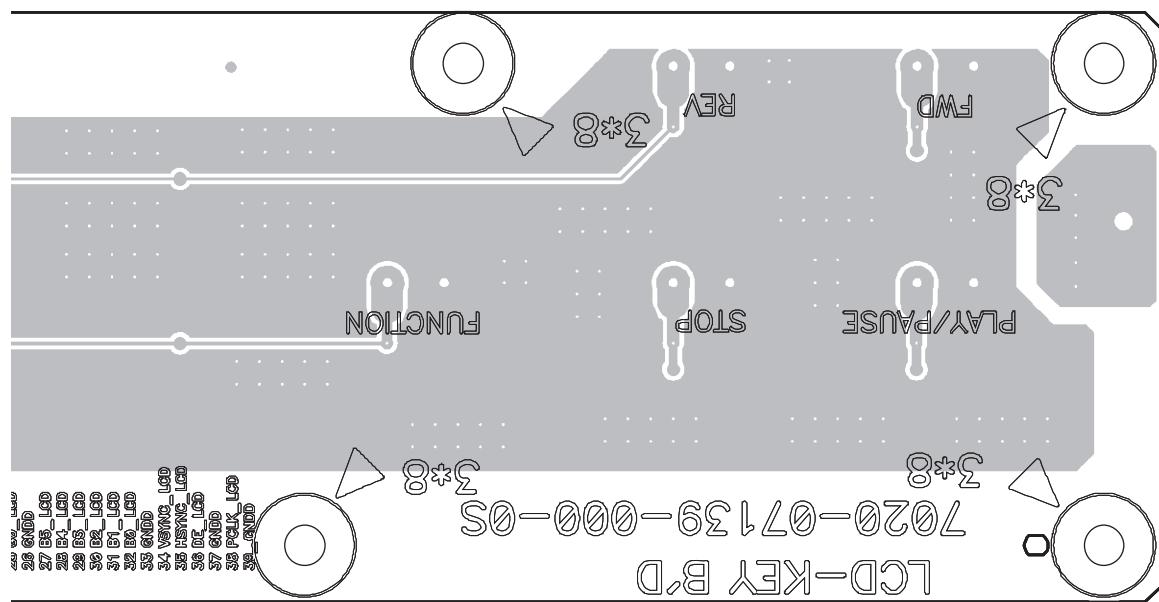**D**


81

11.5 LED ASSY, POWER SW ASSY, IR ASSY AND POWER LED ASSY


SIDE A

SIDE A


E LED ASSY

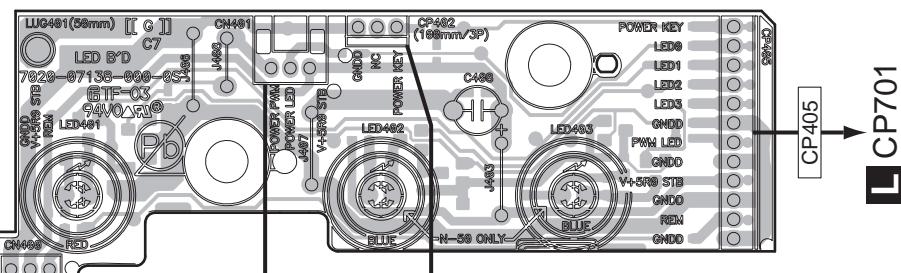


F POWER SW ASSY

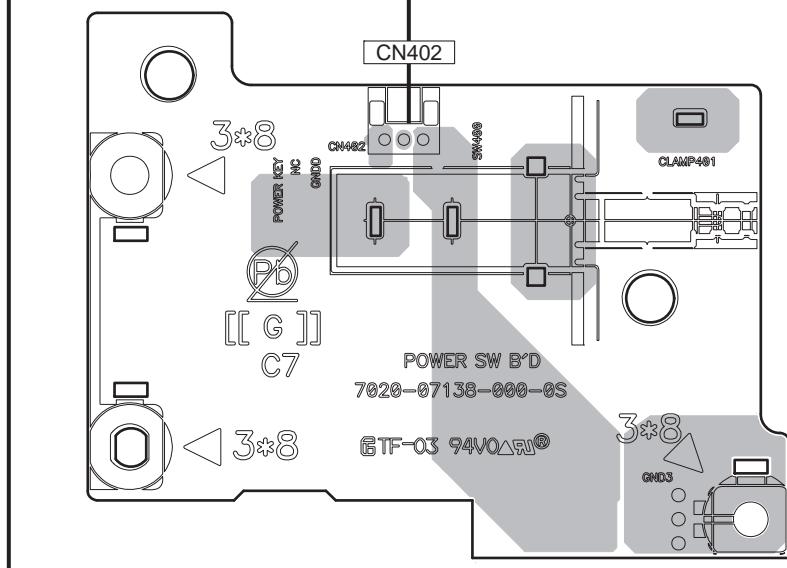

G IR ASSY

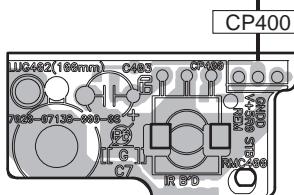

H POWER LED ASSY

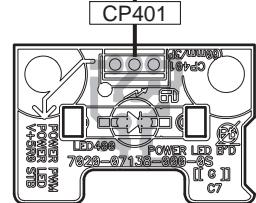

E F G H


E F G H

SIDE B**SIDE B**

A


E LED ASSY

CP402 CN401

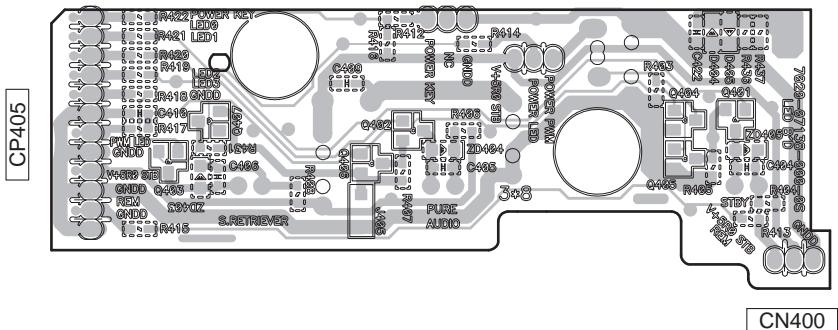**F POWER SW ASSY**

CN402

C

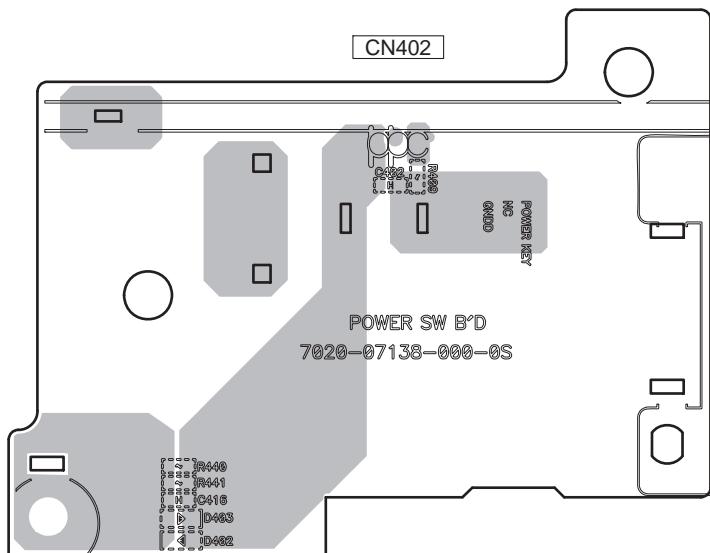


D

H POWER LED ASSY


CP401

E

**G IR ASSY**

CP400


F

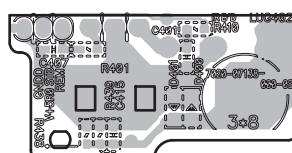**E F G H****E F G H**


11.6 USB ASSY AND STBY ASSY

SIDE A


I **USB ASSY**

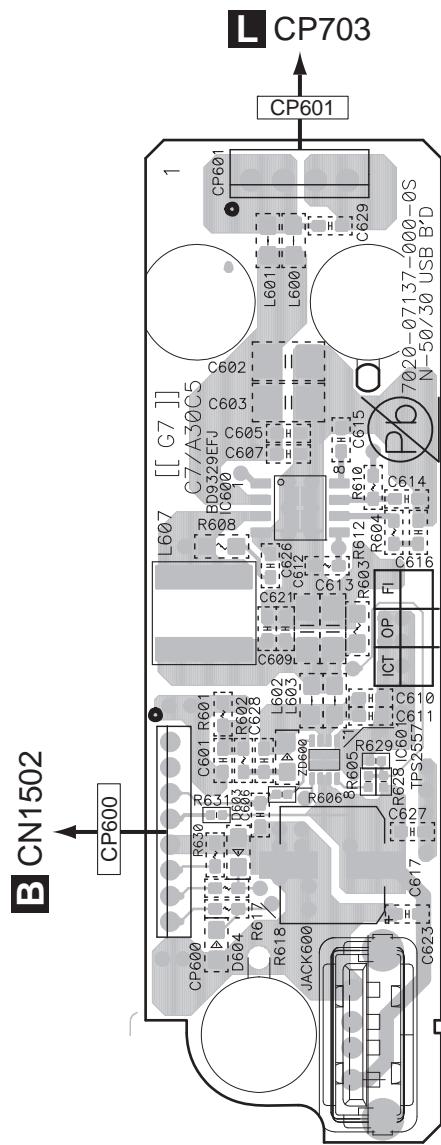

J **STBY ASSY**

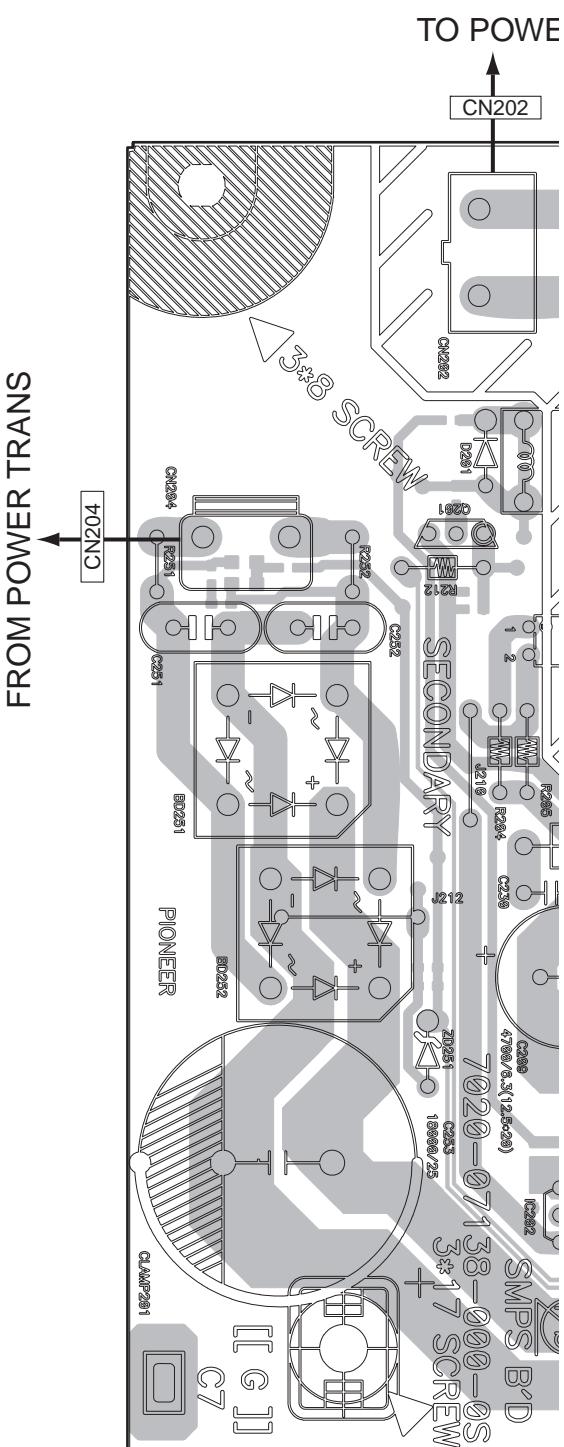

I **J**

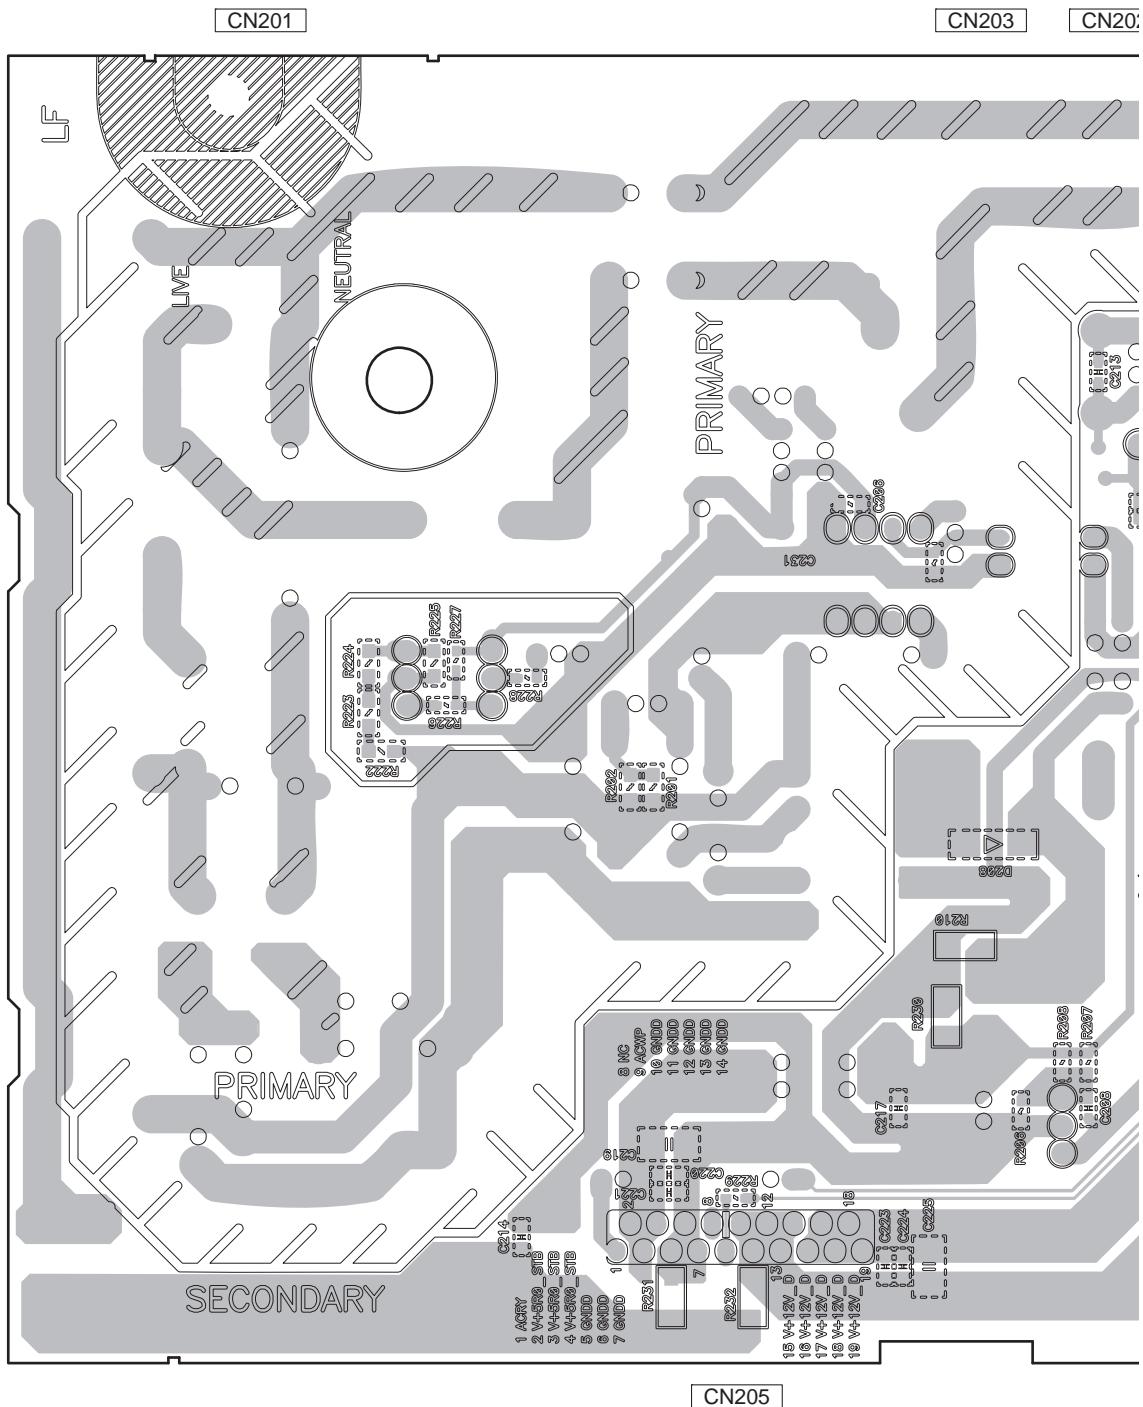
SIDE B**J STBY ASSY**

SIDE B

A


I USB ASSY

V203 CN202

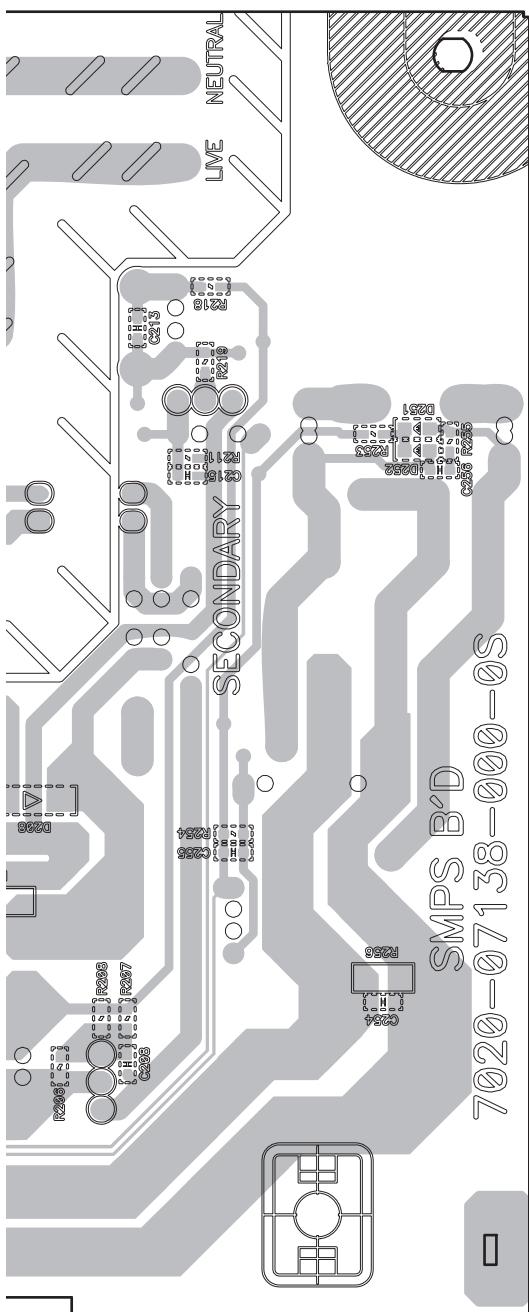

CP601

B

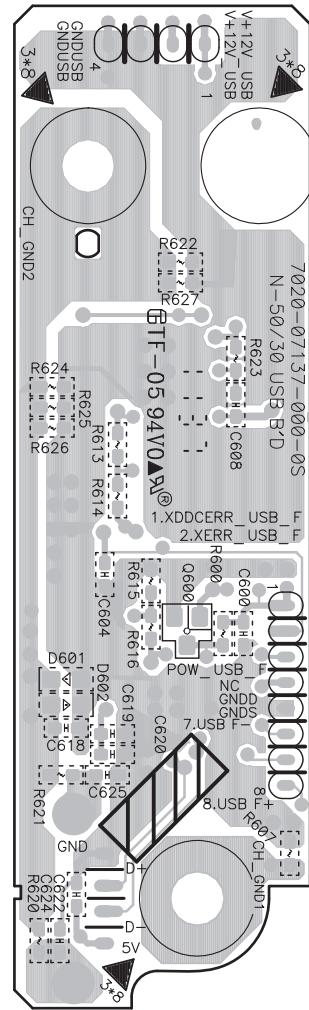

CP600

C

D

E

F

I J


87

1 2 3 4
11.7 CNT A ASSY AND CNT B ASSY


SIDE A

SIDE A

K CNT A ASSY

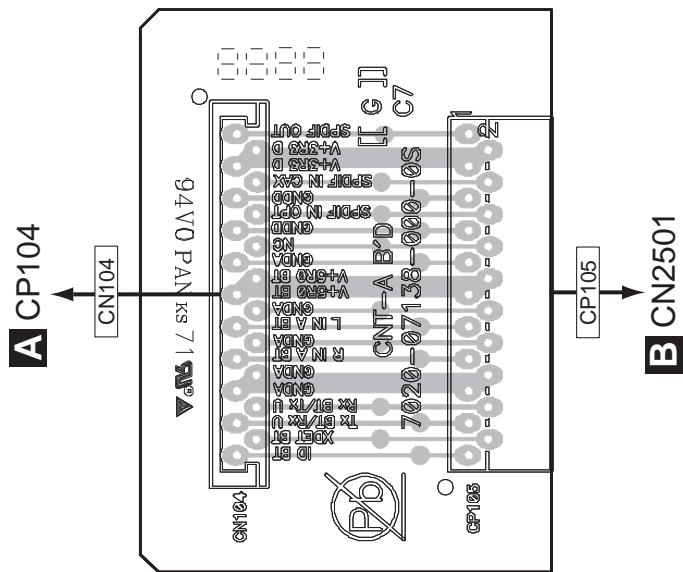

L CNT B ASSY

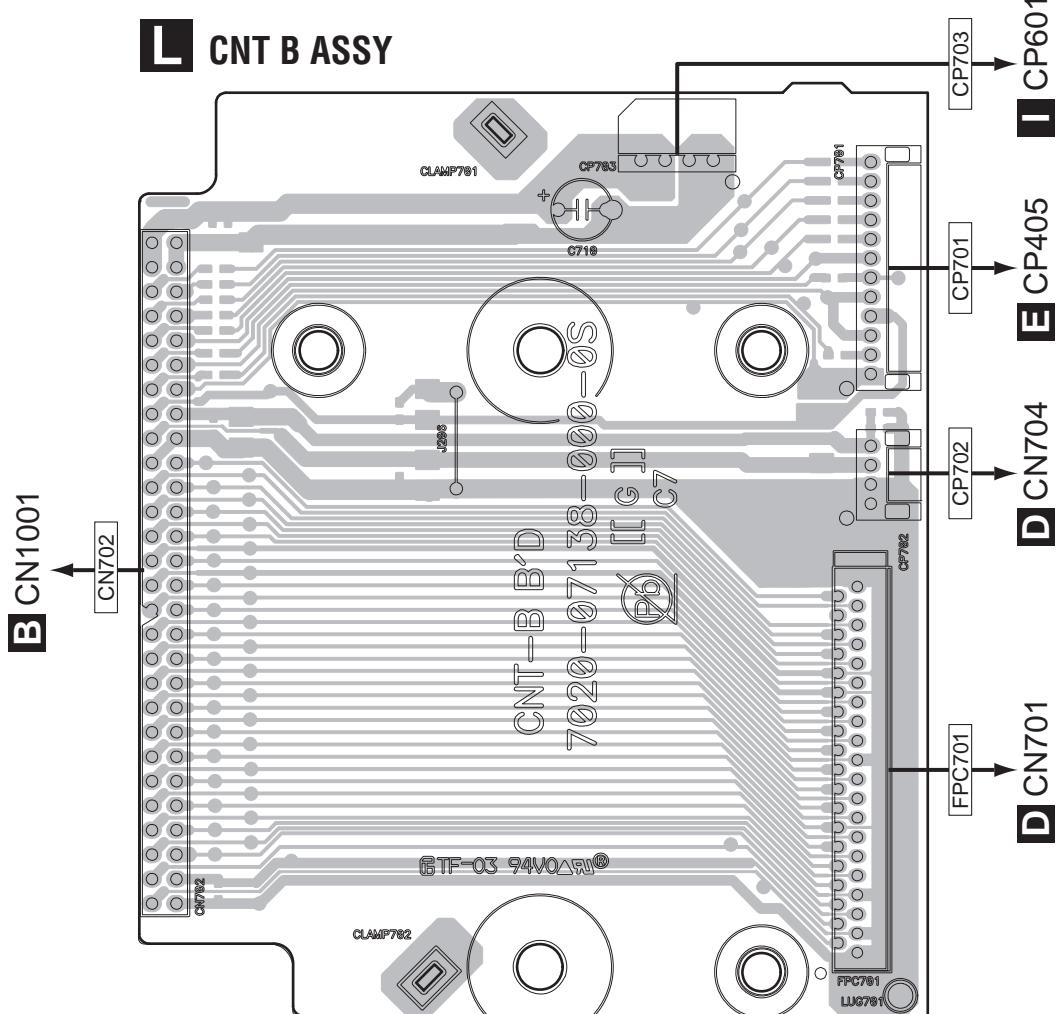

K L

88

1



N-50

K L

4

SIDE B**SIDE B**

A

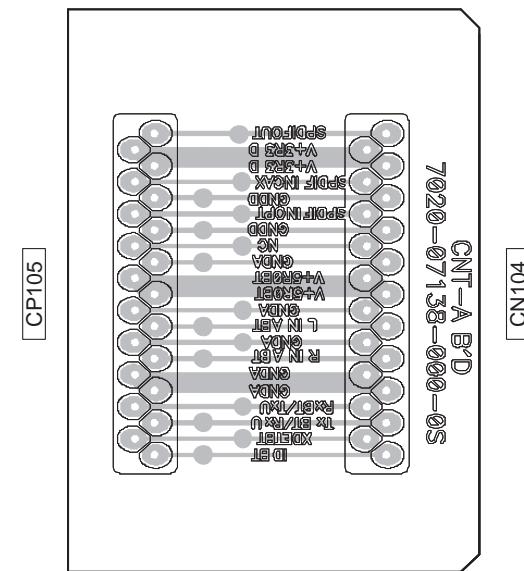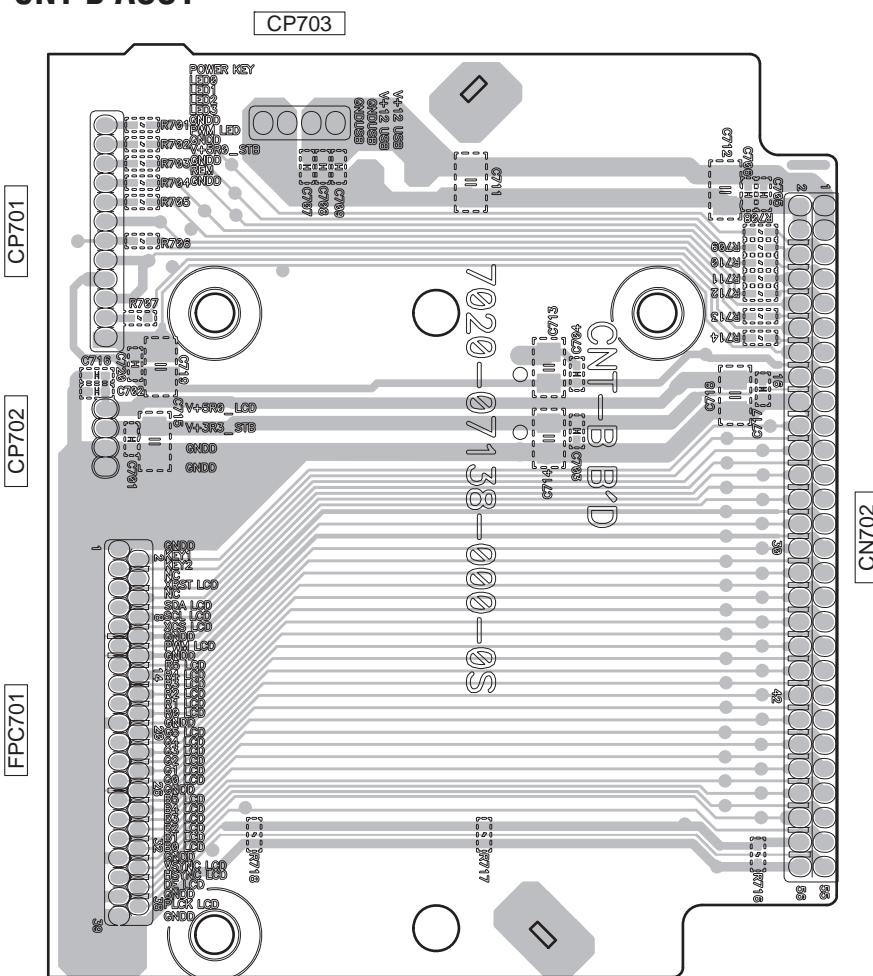K CNT A ASSY**L CNT B ASSY****K L****K L**


89

11.8 GUIDE 1, GUIDE 2 (N-50, N-50-K/-S ONLY), GUIDE 3 AND GUIDE 4 ASSYS

SIDE A


SIDE A

M GUIDE 1 ASSY

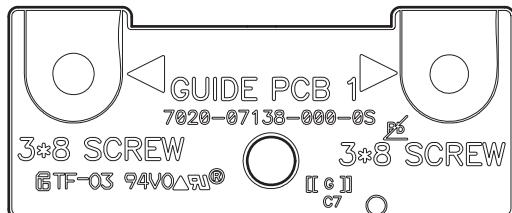


B

N GUIDE 2 ASSY

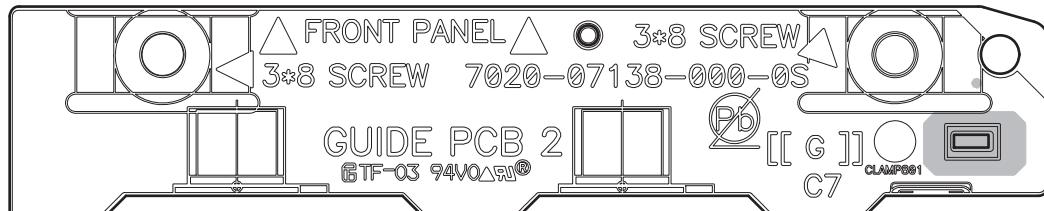


C

O GUIDE 3 ASSY

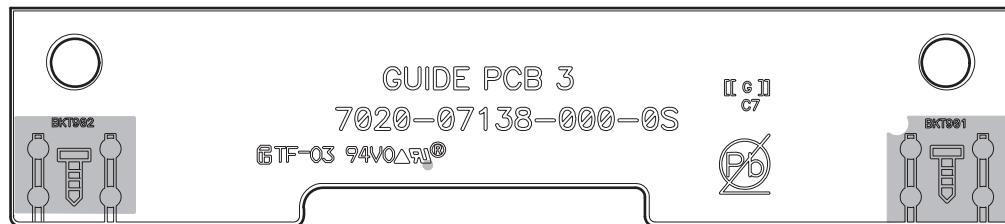

D

P GUIDE 4 ASSY

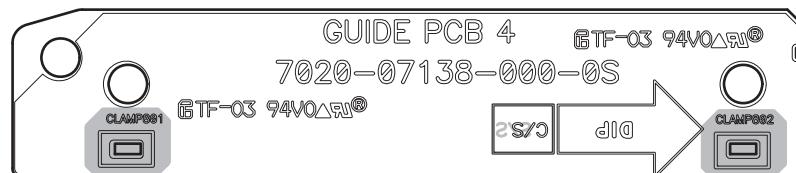

E

M N O P

90

M N O P

4


1

N-50


3

SIDE B**SIDE B**


A

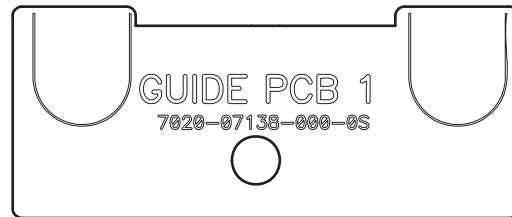M GUIDE 1 ASSY

B

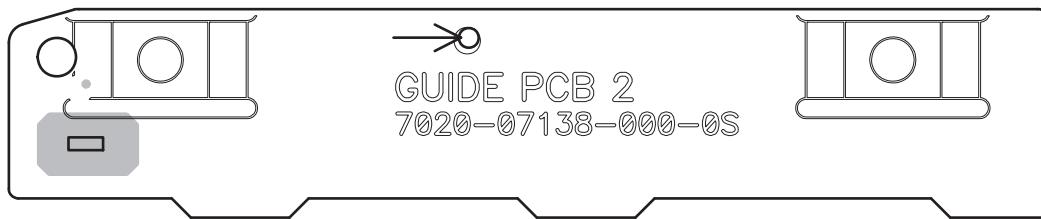N GUIDE 2 ASSY

C

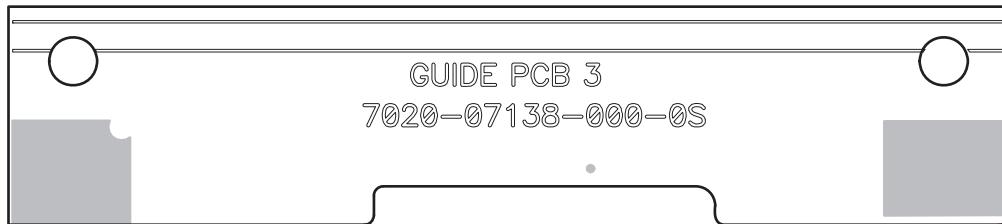O GUIDE 3 ASSY

D

P GUIDE 4 ASSY

E

M N O P**M N O P**

91

N-50

F

12. PCB PARTS LIST

- NOTES:**
- Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
 - The mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - When ordering resistors, first convert resistance values into code form as shown in the following examples.
- Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).*

560 Ω	→	56×10^1	→	561	RD1/4PU [5] [6] [1] J
47 kΩ	→	47×10^3	→	473	RD1/4PU [4] [7] [3] J
0.5 Ω	→	R50			RN2H [R] [5] [0] K
1 Ω	→	IRO			RS1P [I] [R] [0] K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ	→	562×10^3	→	5621	RN1/4PC [5] [6] [2] [1] F
---------	---	-------------------	---	------------	---------------------------

	Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
LIST OF ASSEMBLIES								
A	NSP	1..TTL ASSY D-MAIN(N-50)	7025HU1103040-IL		NSP	1..TTL ASSY DAC(N-30)	7025HU1102032-IL	
		2..D-MAIN ASSY	7028071361010-IL			2..GUIDE 4 ASSY	702807138B010-IL	
	NSP	1..TTL ASSY D-MAIN(N-50-K/S)	7025HU1103030-IL			2..DAC ASSY	7028071381020-IL	
		2..D-MAIN ASSY	7028071361010-IL		2..STBY ASSY	7028071382030-IL		
B	NSP	1.. TTL ASSY D-MAIN(N-30)	7025HU1102030-IL			2..LED ASSY	7028071383020-IL	
		2..D-MAIN ASSY	7028071361020-IL			2..POWER LED ASSY	7028071384010-IL	
	NSP	1..TTL ASSY D-MAIN(N-30-K/S)	7025HU1102040-IL			2..POWER SW ASSY	7028071385010-IL	
C		2..D-MAIN ASSY	7028071361020-IL			2..IR ASSY	7028071386010-IL	
	NSP	1..TTL ASSY USB(N-50)	7025HU1103041-IL	NSP	1..TTL ASSY DAC(N-30-K/S)	7025HU1102042-IL		
		2..USB ASSY	7028071371010-IL			2..GUIDE 4 ASSY	702807138B010-IL	
	NSP	1..TTL ASSY USB(N-50-K/S)	7025HU1103031-IL			2..DAC ASSY	7028071381020-IL	
		2..USB ASSY	7028071371010-IL		2..STBY ASSY	7028071382040-IL		
	NSP	1..TTL ASSY USB(N-30)	7025HU1102031-IL			2..LED ASSY	7028071383020-IL	
D		2..USB ASSY	7028071371010-IL			2..POWER LED ASSY	7028071384010-IL	
	NSP	1..TTL ASSY USB(N-30-K/S)	7025HU1102041-IL			2..POWER SW ASSY	7028071385010-IL	
		2..USB ASSY	7028071371010-IL			2..IR ASSY	7028071386010-IL	
	NSP	1..TTL ASSY DAC(N-50)	7025HU1103042-IL	NSP	1..TTL ASSY JACK(N-50)	7025HU1103043-IL		
		2..GUIDE 2 ASSY	702807138A010-IL			2..JACK ASSY	7028071391010-IL	
		2..GUIDE 4 ASSY	702807138B010-IL			2..LCD/KEY ASSY	7028071392010-IL	
		2..DAC ASSY	7028071381010-IL			2..CNT A ASSY	7028071393010-IL	
		2..STBY ASSY	7028071382010-IL					
		2..LED ASSY	7028071383010-IL	NSP	1..TTL ASSY JACK(N-50-K/S)	7025HU1103033-IL		
		2..POWER LED ASSY	7028071384010-IL			2..JACK ASSY	7028071391010-IL	
		2..POWER SW ASSY	7028071385010-IL			2..LCD/KEY ASSY	7028071392010-IL	
		2..IR ASSY	7028071386010-IL			2..CNT A ASSY	7028071393010-IL	
	E	2..GUIDE 3 ASSY	7028071387010-IL	NSP	1..TTL ASSY JACK(N-30)	7025HU1102033-IL		
		2..CNT B ASSY	7028071388010-IL			2..JACK ASSY	7028071391020-IL	
		2..GUIDE 1 ASSY	7028071389010-IL			2..LCD/KEY ASSY	7028071392010-IL	
	NSP	1..TTL ASSY JACK(N-50-K/S)	7025HU1103032-IL			2..CNT A ASSY	7028071393010-IL	
		2..GUIDE 2 ASSY	702807138A010-IL	NSP	1..TTL ASSY JACK(N-30-K/S)	7025HU1102043-IL		
		2..GUIDE 4 ASSY	702807138B010-IL			2..JACK ASSY	7028071391020-IL	
		2..DAC ASSY	7028071381010-IL			2..LCD/KEY ASSY	7028071392010-IL	
		2..STBY ASSY	7028071382020-IL			2..CNT A ASSY	7028071393010-IL	
		2..LED ASSY	7028071383010-IL					
		2..POWER LED ASSY	7028071384010-IL					
		2..POWER SW ASSY	7028071385010-IL					
		2..IR ASSY	7028071386010-IL					
F		2..GUIDE 3 ASSY	7028071387010-IL					
		2..CNT B ASSY	7028071388010-IL					
		2..GUIDE 1 ASSY	7028071389010-IL					

**A JACK ASSY****7028071391010-IL and 7028071391020-IL are constructed the same except for the following:**

Mark	Symbol and Description	7028071391010-IL	7028071391020-IL
	IC100	E100216500010-IL	Not used
	IC103	TC74VHCU04FT	Not used
	JA101 Ter,rca 1pin	G600117G03000-IL	Not used
	JA102 Pin Jack(1p)	G600107AGF00Y-IL	G600107A0000Y-IL

**B D-MAIN ASSY****7028071361010-IL and 7028071361020-IL are constructed the same except for the following:**

Mark	Symbol and Description	7028071361010-IL	7028071361020-IL
	IC2003	8952N50000010-IL	Not used
	IC2004	TC74VHC126FK	Not used
	IC2005	TC7SH08FUS1	Not used
	IC2503	CM6631-K	Not used
	IC2506	TC74VHC157FK	Not used
	IC2507	TC74VHC126FK	Not used
	IC3011	S-1172B12-U5	Not used
	IC3029	BD9328EFJ	Not used
	Q2001	J522011400020-IL	Not used
	Q2505	2SA1576A(QR)	Not used
	Q3003	RTQ040P02	Not used
	Q3011	2SC4081(QR)	Not used
	L2001 Chip Bead	D340212561010-IL	Not used
	L2002 Chip Bead	D340212561010-IL	Not used
	L2509 Chip Bead	D340212561010-IL	Not used
	L3046 Coil,inductor	D310502061000-IL	Not used
	L3052 Chip Bead	D340212561010-IL	Not used
	JA2501 Cn,plug Contact	G480670680010-IL	Not used
	C2004	VCH1234	Not used
	C2011	VCH1234	Not used
	C2039	D050221081550-IL	Not used
	C2561	VCH1234	Not used
	C3019	D050221081550-IL	Not used
	C3140	VCH1234	Not used

**C DAC ASSY****7028071381010-IL and 7028071381020-IL are constructed the same except for the following:**

Mark	Symbol and Description	7028071381010-IL	7028071381020-IL
	JA500 Ter,rca 1pin	G600117G05000-IL	G600117050000-IL
	JA501 Ter,rca 1pin	G600117G06000-IL	G600117060000-IL
	CN500 Cn.fpc 1.25mm	L131019100010-IL	Not used
	CN501 Connector(3p)	L102526700300-IL	Not used
	CN9500 Cn.fpc 1.25mm	Not used	L131019100010-IL
	CN9501 Connector(3p)	Not used	L102526700300-IL

**E LED ASSY****7028071383010-IL and 7028071383020-IL are constructed the same except for the following:**

Mark	Symbol and Description	7028071383010-IL	7028071383020-IL
	Q402	J522010300210-IL	Not used
	Q403	J522010300210-IL	Not used
	Q406	J522010300210-IL	Not used
	Q407	J522010300210-IL	Not used
	D402	K500036001420-IL	Not used
	D403	K500036001420-IL	Not used

**STBY ASSY**

7028071382010-IL, 7028071382020-IL, 7028071382030-IL and 7028071382040-IL are constructed the same except for the following:

Mark	Symbol and Description	7028071382010-IL	7028071382020-IL	7028071382030-IL	7028071382040-IL
	CN203 Cn.wafer 7.92mm	L108011430210-IL	L108011430210-IL	Not used	Not used

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
------	-----	-------------	----------	------	-----	-------------	----------

A JACK ASSY
SEMICONDUCTORS

B	IC 100	E100216500010-IL	JA 1502	JACK,MODULAR	G4060RJ450120-IL
	IC 101	E100216500020-IL	JA 2501	CN,PLUG CONTACT	G480670680010-IL
	IC 103,104	TC74VHCU04FT	CN 1001	CN.WAFER 2.5MM	L102125425610-IL

MISCELLANEOUS

JA 101	TER,RCA 1PIN	G600117G03000-IL
JA 102	PIN JACK(1P)	G600107AGF00Y-IL
T 101	COIL,CHOKE	D300726100010-IL
CN 103	CONNECTOR	CKS5712
CN 104	CN,WAFER	L109012522110-IL

B D-MAIN ASSY
SEMICONDUCTORS

C	IC 1001	8952N30000020-IL	C 2686	D040222081000-IL
	IC 1002	BU4828F	C 3019,3072	D050221081550-IL
⚠	IC 1502,2513	BD2226G	C 3152,3230	D050101085210-IL
	IC 1503	LAN8700C-AEZG		
	IC 1506	341S2164		
	IC 1508	TC7USB31FK	IC 502	J126780500550-IL
	IC 2003	8952N50000010-IL	IC 503	AK4480EF
	IC 2004,2507,2508,2521	TC74VHC126FK	IC 504,505	J121458000020-IL
	IC 2005,2519	TC7SH08FUS1	⚠ IC 506	KIA7815API
	IC 2501	AK4118AEQ	⚠ IC 507	KIA7915PI

D	IC 2503	CM6631	Q 501	J522010200210-IL
	IC 2505,2506	TC74VHC157FK	Q 502	J520010200210-IL
	IC 2509	AK5358AET	Q 505-508	J5232114K0010-IL
	IC 2515	ICS87002BM-05	D 500,501,509,510	K005041480030-IL
	IC 2522	TC7SH04FUS1	D 502	K000013300520-IL

E	IC 3001,3002,3029	BD9328EFJ	⚠ D 505-508	K000400700010-IL
⚠	IC 3011	S-1172B12-U5		
⚠	IC 3012	S-1170B33UC-OTS		
⚠	IC 3031	J126780500110-IL		
	Q 1001,1002,1501,1503	UMD2N		

E	Q 2001,2501,2503,2504	J522011400020-IL	MISCELLANEOUS	
	Q 2505	2SA1576A	JA 500	TER,RCA 1PIN
	Q 2508,3011,3016	2SC4081	JA 501	TER,RCA 1PIN
	Q 2509	UMD2N	CN 500	CN.FPC 1.25MM
	Q 3001,3003,3009,3015	RTQ040P02	CN 501	CONNECTOR(3P)
	Q 3006,3010,3012	J522011400020-IL	RESISTORS	
	D 2501	DAP202U	R 597	C060033166050-IL
	D 2502	DAN202U		
	D 2504	1SS355		

F	MISCELLANEOUS		CAPACITORS	
	L 1504,1505,1516,2001 CHIP BEAD	D340212561010-IL	C 503,504,506,507	D02010406C060-IL
	L 2002,2507-2509,2517 CHIP BEAD	D340212561010-IL	C 505,513,517	D040101084060-IL
	L 2522,3050-3052 CHIP BEAD	D340212561010-IL	C 511,512,515,516	D02010406C060-IL
⚠	L 3027,3039,3046 COIL,INDUCTOR	D310502061000-IL	C 518,545,549	D040102085030-IL
	JA 1501 CN,PLUG CONTACT	G480040400030-IL	C 519,520	D02039206C060-IL

Mark No. Description**Part No.**
**D LCD/KEY ASSY
SEMICONDUCTORS**

Q 700 J522010300210-IL

MISCELLANEOUS

S 700-704	SWITCH	G180501000010-IL
CN700	CN.FPC 0.5MM	L136050020350-IL
CN701	CN.FPC 1.0MM	L130100113950-IL
CN704	CN, WIRE 2MM	L002800042620-IL

RESISTORS

R 731 C060027065050-IL

**E LED ASSY
SEMICONDUCTORS**

Q 401-404,406,407	J522010300210-IL
D 401	K500032001160-IL
D 402,403	K500036001420-IL

MISCELLANEOUS

CN401 CN.WAFER 2.0MM L101200100320-IL

**F POWER SW ASSY
MISCELLANEOUS**

S 400	SW,PUSH	G000122006060-IL
CN 402	CN.WAFER 2.0MM	L101200100320-IL

**G IR ASSY
SEMICONDUCTORS**

IC 400 E940349003810-IL

**H POWER LED ASSY
SEMICONDUCTORS**

Q 400	J522010300210-IL
D 400	K500036001420-IL

**I USB ASSY
SEMICONDUCTORS**

△ IC 600	BD9329EFJ
△ IC 601	J046255700010-IL
△ Q 600	J5223875Y0210-IL
D 600	K06605R64P400-IL

MISCELLANEOUS

L 607	COIL,INDUCTOR	D310804061000-IL
JA 600	CN,PLUG CONTACT	G480040040040-IL

Mark No. Description**Part No.**
**J STBY ASSY
SEMICONDUCTORS**

IC 201	J040226010010-IL
IC 202	J126243118010-IL
Q 201	J5023198Y0000-IL
△ D 201	K000013300520-IL
D 202-205	K04000100010-IL

△ D 206	K050000015000-IL
D 207	K000400700010-IL
△ D 208	K125036000010-IL
D 251,252	K005041480030-IL
△ D 7251,7252	K047604000020-IL

D 9201,9203	K06039R044520-IL
D 9202	K06006R844520-IL
D 9251	K06005R144520-IL
△ TH 201	F340315005510-IL

MISCELLANEOUS

△ L 201	COIL,LINE FILTER	D320101405510-IL
△ RY 201	RELAY	G680050102020-IL
△ T 201	TRANS,SWITCHING	E060928705510-IL
△ CN 201	CONNECTOR	L108202000220-IL
△ CN 202,203	CN.WAFER 7.92MM	L108011430210-IL

CN 204	CONNECTOR	L108202000220-IL
CN 205	CN.FPC 1.25MM	L131019000010-IL
FU 201,202	FUSE GLASS TUBE 20MM	N751501001160-IL
△ PC 201	PHOTO,COUPLER	K614817005510-IL

RESISTORS

R 233 C060010465520-IL

CAPACITORS

△ C 202	D02147307H000-IL
C 205	D04022008C070-IL
△ C 207,232	D00815248H010-IL
C 210	D040471081070-IL
△ C 211	D00847127H010-IL

C 212 D00847127H010-IL

**K CNT A ASSY
MISCELLANEOUS**

CN 104	CN.WAFER	L109012512110-IL
CN 105	CN.WAFER	L109012522110-IL

**L CNT B ASSY
MISCELLANEOUS**

CN 702	CN.WAFER 2.5MM	L102225425610-IL
CN 8701	CN.FPC 1.0MM	L130100113950-IL
CN 9701	CN.WAFER 2.0MM	L101200101220-IL
CN 9702	CN.WAFER 2.0MM	L101200100420-IL
CN 9703	CN.WAFER 2.5MM	L102526800400-IL

M GUIDE 1 ASSY

GUIDE 1 ASSY has no service parts.

Mark No. Description Part No.

N **GUIDE 2 ASSY**

GUIDE 2 ASSY has no service parts.

A

O **GUIDE 3 ASSY**

GUIDE 3 ASSY has no service parts.

B

P **GUIDE 4 ASSY**

GUIDE 4 ASSY has no service parts.

C

D

E

F